
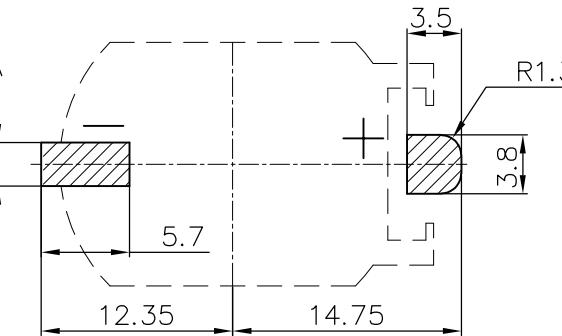
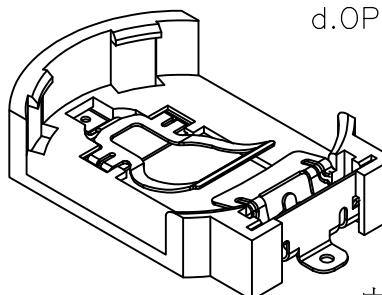



1	2	3	4	5	6	7	8
RoHs 环保	A型					REV.	ECN NO.

A  
B  
C  
D  
E  
F  
G  
H

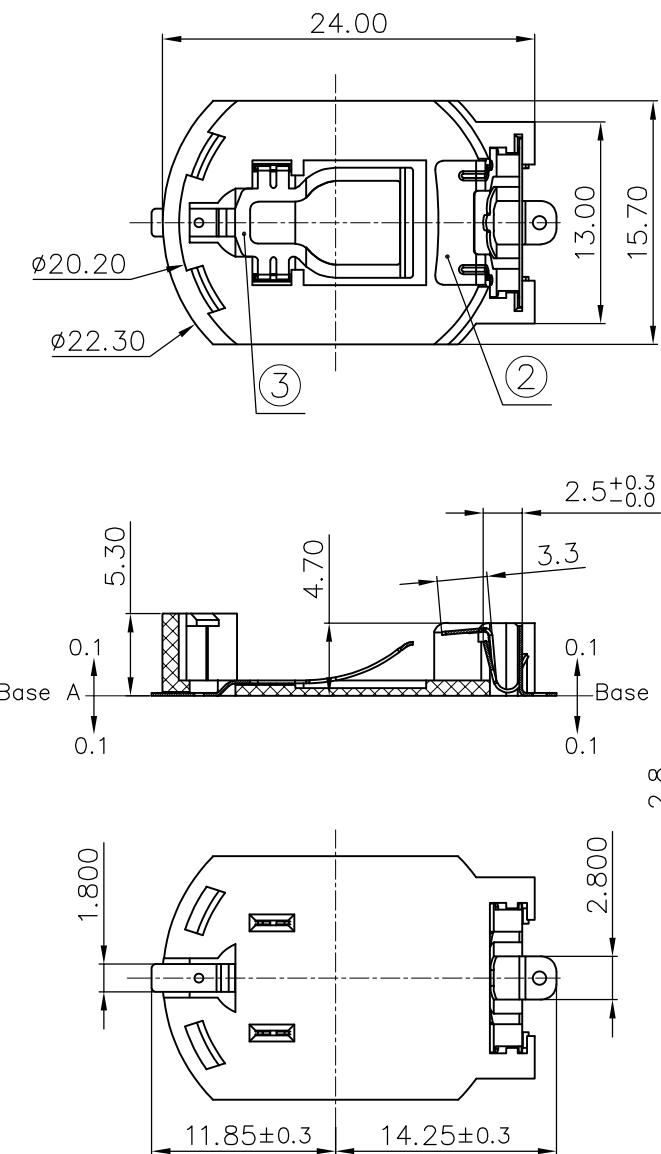

PCB Layout Diagram  
Top View

NOTE:  
1. MATERIAL:  
a. HOUSING: PPA  
b. CONTACT: BERYLLIUM BRONZE  
(SURFACE PLATING: Au1u")  
SEE ORDERING INFORMATION  
2. ELECTRIC:  
a. CONTACT RESISTANCE: 30 MILLIOHMS MAX  
b. INSULATION RESISTANCE: 100 MEGA OHMS MIN  
c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL  
d. OPERATING TEMPERATURE: -25° C ~ +85° C

ORDERING INFORMATION  
BS-08-B2AA032

电池座系列

BS-08系列

SMT 180° TYPE

PLATING:  
A-Au1u"  
J-Ni100u"~120u"  
K-Sn100u"~120u"

MATERIAL:  
1A-PBT BLACK  
1B-PA66 BLACK  
2A-PPA BROWN  
2B-PPA BLACK  
3A-PPS BROWN  
3B-PPS BLACK  
4A-LCP WHITE  
4B-LCP BLACK

工程部  
2021-06-01  
LQ. HUANG

UNLESS OTHERWISE  
SPECIFIED TOLERANCES

DECIMALS: ANGLES:  
X :±0.30 X :±1°  
X.X :±0.25 X.X :±0.5°  
X.XX :±0.20  
X.XXX :±0.10

WEIGHT:

DSND YangFeng DATE 2021-06-01 TITLE: BS-2032-8JKC 0.7 SMT

CHKD ZhouRuicai DATE 2021-06-01

APVD XueShunyong DATE 2021-06-01

SCALE: SIZE: A4 VIEW:

UNIT: mm REV.: A/0 OBJECT: MY DRAW NO.: MY-CP-0184

PART NO.: BS-08-B2AA032

3	TERMINAL(-)	1	BERYLLIUM BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	BERYLLIUM BRONZE, T=0.20mm	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BROWN
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
1				
2				
3				

