




## Features

- For surface mounted applications to optimize board space
- Low profile package
- Bidirectional crowbar protection
- Low leakage current :  $I = 5\mu A$  max
- Low on-state voltage
- Low Capacitance
- Response Time is  $< 1\mu s$
- YD/T 950 IEC 61000-4-5
- YD/T 993 ITU K.20/21
- YD/T 1082 TIA-968-A
- GR 1089 Intra-building
- Solid-state silicon technology
- Meets MSL 1 Requirements
- ROHS compliant

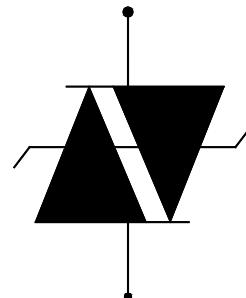

**Schematic Diagram**

## Maximum Ratings and Electrical Characteristics

Symbol	Parameter	Value	Unit
I <sub>PP</sub>	Non-repetitive peak pulse current	10/1000 us	A
		2/10 us	
		8/20 us	
V <sub>PP</sub>	Non-repetitive peak pulse voltage	10/700us	V
V <sub>ESD</sub>	ESD Rating per IEC61000-4-2:	Contact	KV
		Air	
T <sub>s</sub>	Storage temperature range	-40 to +150	°C
T <sub>j</sub>	Maximum junction temperature	125	°C


Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

\*Other voltages may be available upon request.



## Electrical Parameters

Symbol	Parameter
$V_{DRM}$	Stand-off voltage
$V_S$	Switching Voltage
$I_S$	Switching current
$I_{DRM}$	Leakage current at $V_{DRM}$
$I_T$	On-state current
$I_H$	Holding current
$V_T$	On-state Voltage at $I_T$
$C_o$	Off-state Capacitance

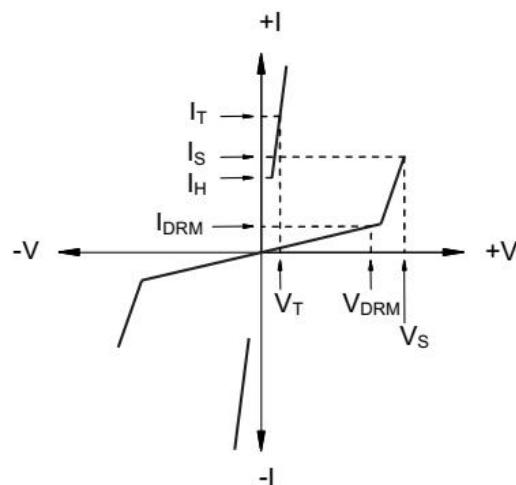

Parameter	Tests Conditions	Min.	Typ.	Max.	Unit
$V_{DRM}$	$I_{DRM}=1\mu A$	5			V
$I_{DRM}$	$V_{DRM}$			5	uA
$V_S$	$100V/\mu s$			15	V
$V_T$	$I_T=1.0A$			4	V
$I_H$	$10A, 10/1000\mu s$	10			mA
$C_o$	$2V, 1MHz$		25		pF
$I_S$	$V_s$			800	mA



## Typical electrical characterist applications

### Rating and Characteristics Curves

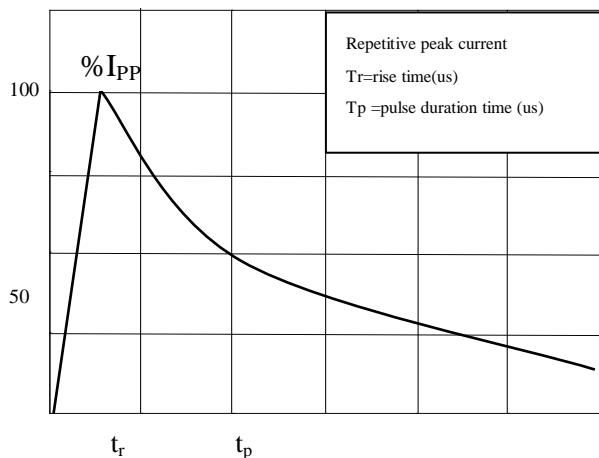


Fig.1 Pulse Waveform (5/310us)

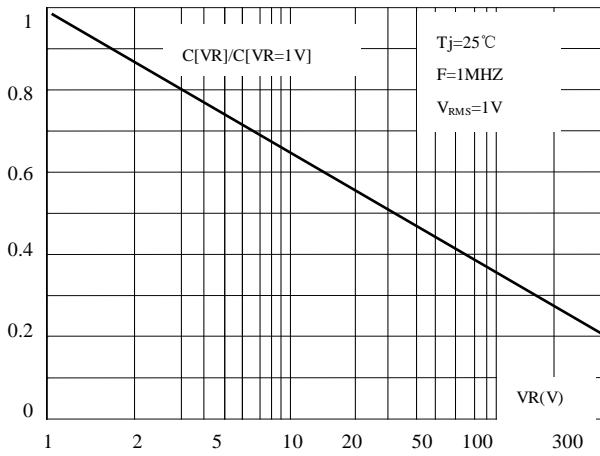


Fig. 2 Relation Variation Of Junction Capacitance Versus Reverse Voltage Applied (Typical Values)

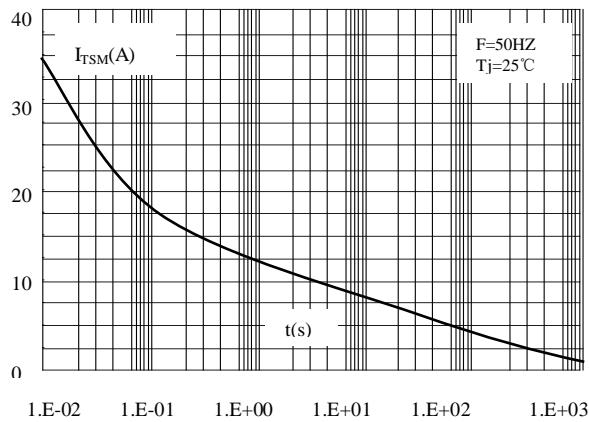


Fig.3 Non Repetitive Surge Peak On-State Current Versus Overload Duration

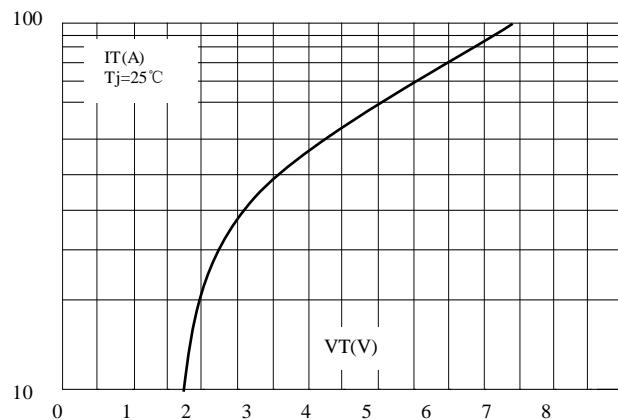


Fig.4 On-State Voltage Versus On-State Current (Typical Values)

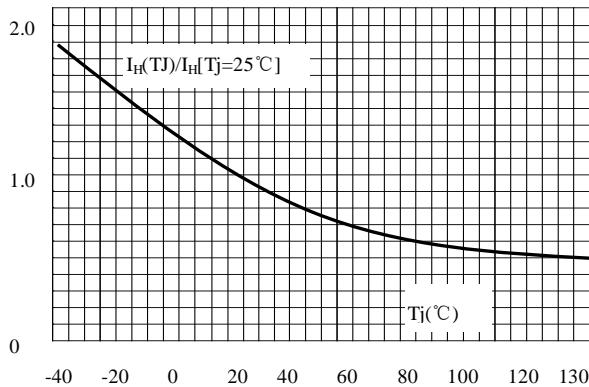


Fig.5 Relative Variation of Hold Current Versus Junction Temperature

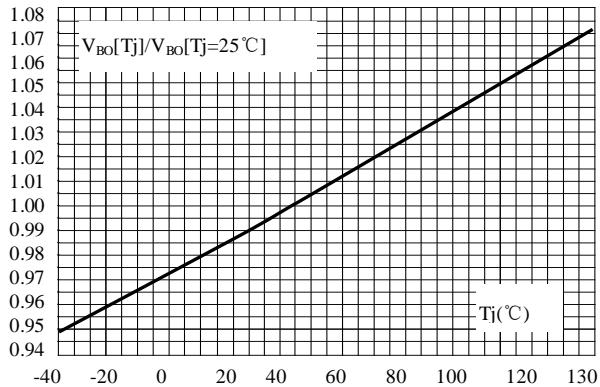


Fig.6 Relative Variation of Break Over Voltage Versus Junction Temperature



## Typical electrical characterist applications

### Rating and Characteristics Curves

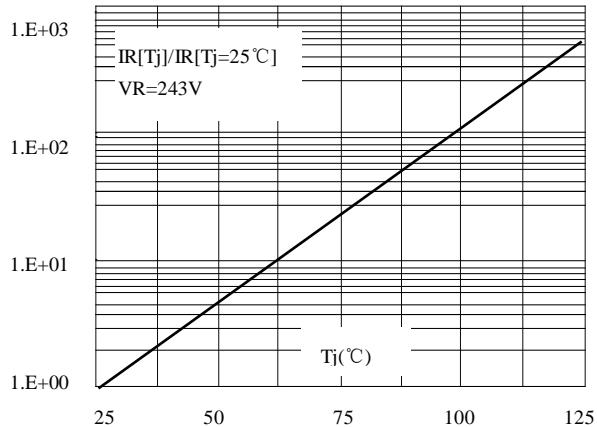


Fig.7 Relative Variation Of Leakage Current Versus Reverse Voltage (Typical Values)

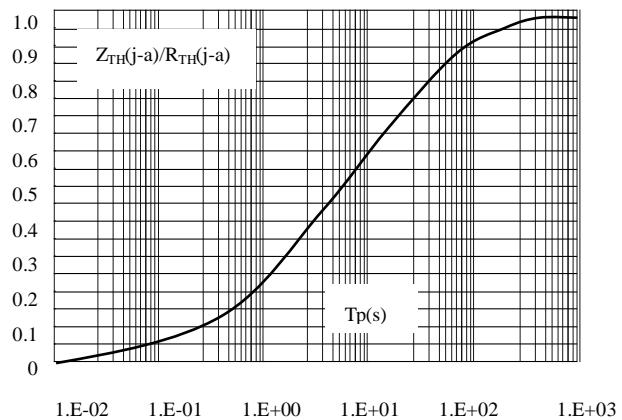



Fig.8 Variation Of Thermal Impedance Junction To Ambient Versus Pulse Duration



## Package Information


### Mechanical Data

- Case: SMA
- Case Material: Molded Plastic. UL Flammability
- Classification Rating 94V-0
- Polarity Indicator: Cathode Band (Note: Bi-directional devices have no polarity indicator.)
- Weight: 0.064 grams (approximate)

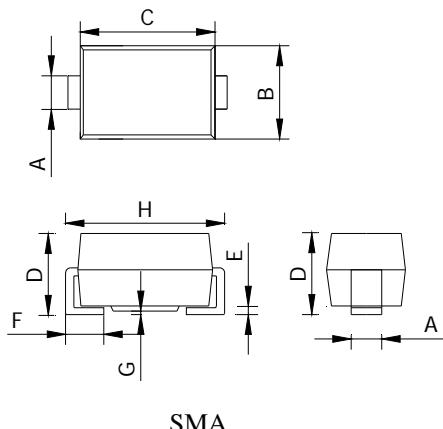

DIM	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A	1.25	1.45	1.65	0.049	0.057	0.065
B	2.40	2.67	2.79	0.095	0.105	0.110
C	3.39	3.95	4.60	0.133	0.156	0.181
D	1.98	2.14	2.29	0.0779	0.084	0.090
E	0.150	0.200	0.310	0.006	0.009	0.012
F	0.76	1.14	1.52	0.030	0.045	0.060
G	-	-	0.203	-	-	0.008
H	4.80	5.11	5.28	0.194	0.201	0.208


### SMA Reel Dim

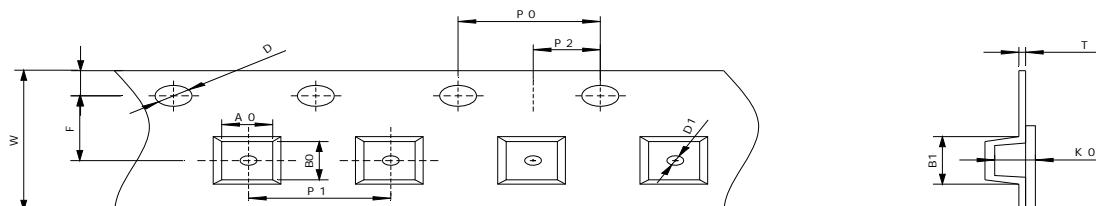

A0	B0	B1	D	D1	E	F	K0	T	W	P0	P1	P2
2.7	5.3	5.5	1.5	1.0	1.75	3.5	2.5	0.50	12	4.0	4.0	2.0

Dimension is in mm


### Leader and Trailer

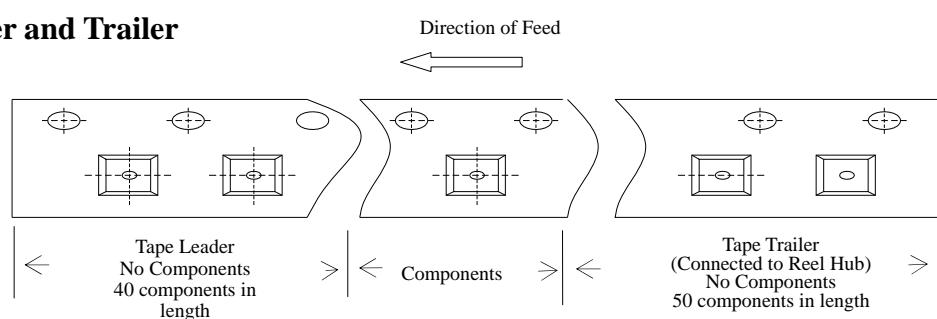


The LEADER is a minimum of 40 components in length and it consists of empty cavities with sealed cover tape  
The TRAILER is a minimum of 50 components in length and it consists of empty cavities with sealed cover tape.



## Marking Codes

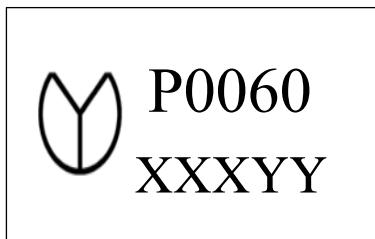

OR

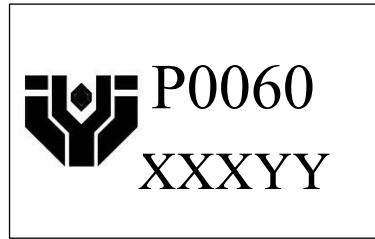

**Note:**

- (1) "P0060" is part number,fixed.
- (2) "XXX" is the last 3 characters of the wafer's Lot No.,  
"YY" is internal code.

## Ordering Information

Part Number	Working Voltage	Quantity Per Reel	Reel Size
P0060SC-H	5V	5,000	13 inch