


General Replacement Tube Output (8 Watt) Push-Pull

125H Series

Features

- Designed for general purpose or replacement use in push-pull tube output circuits.
- Frequency response: 150 Hz. - 15 KHz (+/- 1db max. ref. 1 KHz)
- Open style with minimum 5" long primary leads, secondary solder lugs for convenient secondary connections.
- Also see our **125J Series**.
- For single ended use, see our **125SE Series**.
- For more impedance options, see our universal impedance push-pull **125 Series**.

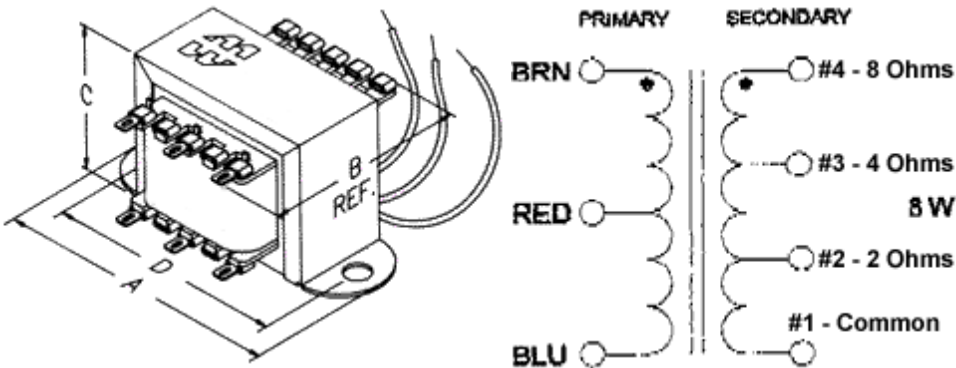

Part No.	Primary		Secondary		Weight (lbs.)	Overall Dimensions				Mounting Hole G
	Audio Watts	Impedance (Ohms)	Impedance (Ohms)	Primary Inductance		A	B	C	D	
125H	8	10K	2, 4 or 8	5.60 H	0.55	2.81	1.00	1.63	2.38	0.19

Tags: audio transformer, tube audio, valve audio, push-pull, Data subject to change without notice
output, tube output, 8 watt