

TPS6269xEVM-076 Evaluation Module

This user's guide describes the characteristics, operation, and use of the TPS6269xEVM-076 evaluation module (EVM). The TPS6269xEVM-076 is a fully assembled and tested platform for evaluating the performance of the TPS6269x high-frequency, synchronous, step-down dc-dc converters optimized for battery-powered portable applications. This document includes schematic diagrams, a printed circuit board (PCB) layout, bill of materials, and test data. Throughout this document, the abbreviations *EVM*, *TPS6269xEVM*, and the term *evaluation module* are synonymous with the TPS62690/1/2/3EVM-076 unless otherwise noted.

Contents

1	Introduction	2
	1.1 Features	2
	1.2 Applications	2
	1.3 EVM Ordering Options	2
2	TPS62690/1/2/3EVM Schematic	3
3	Connector and Test Point Descriptions	3
	3.1 Input/Output Connectors: TPS6269xEVM	3
	3.2 Jumpers and Switches	4
4	Test Configurations	5
	4.1 Hardware Setup	5
	4.2 Procedure	5
5	TPS62691EVM Test Data	6
	5.1 Efficiency	6
	5.2 Start-up	7
	5.3 Output Voltage Ripple (Power-Save Mode)	8
	5.4 Output Voltage Ripple (PWM)	9
6	TPS62690/1/2/3EVM Assembly Drawing and Layout	10
7	TPS62690/1/2/3EVM Bill of Material	13
8	Marking Information for this EVM	13

List of Figures

1	TPS6269xEVM Schematic.....	3
2	JP3 and LP1 Set Up	4
3	Hardware Board Connection	5
4	Efficiency vs Load current for the TPS62691	6
5	TPS62691 Start-Up Using EN With No Load, Vin = 3.6 V and Vout = 2.2 V	7
6	TPS62691 Start-up Using EN With 200-mA Load, Vin = 3.6 V and Vout = 2.2 V	7
7	Power-Save Mode Ripple at Vin = 3.6 V and Vout = 2.2 V With Iload = 40 mA	8
8	PWM Mode Ripple at Vin = 3.6 V and Vout = 2.2 V With Iload = 40 mA	9
9	PWM Mode Ripple at Vin = 3.6 V and Vout = 2.2 V With Iload = 200 mA	9
10	TPS62690/1/2/3EVM Component Placement (Top View)	10
11	TPS62690/1/2/3EVM Top-Side Copper (Top View)	11
12	TPS62690/1/2/3EVM L2-Side Copper	11
13	TPS62690/1/2/3EVM L3-Side Copper	12
14	TPS62690/1/2/3EVM Bottom-Side Copper (Bottom View)	12

List of Tables

1	Ordering Information for TPS62690/1/2/3EVM.....	2
2	Bill of Material for the TPS62690/1/2/3EVM	13
3	Marking Information	13

1 Introduction

The TPS6269x devices are a series of high-frequency, synchronous, step-down dc-dc converters optimized for battery-powered portable applications. Intended for low-power applications, the TPS6269x can support up to 600-mA load current and allows the use of low-cost chip inductors and capacitors. The TPS62691 and TPS62690 have fixed output voltages of 2.2 V and 2.85 V respectively. The TPS6269x operates at a regulated 4-MHz switching frequency and enters a power-save mode operation under light load currents in order to maintain high efficiency over the entire load-current range. A PFM mode extends the battery life by reducing the quiescent current to 19 μ A (typical) during light load operation.

1.1 Features

- Input voltage range 2.3 V to 4.8 V
- Fixed output voltage
- Up to a 600-mA output current for TPS62691 and 500 mA for the TPS62690
 - 4-MHz regulated frequency operation
- Up to an 800-mA output current for TPS62692 and 500 mA for the TPS62690
 - 3-MHz regulated frequency operation
- Total solution size is less than 12 mm²
- Very low quiescent current of 19 μ A
- High efficiency

1.2 Applications

- Cell phones, smartphones
- LDO replacement
- Portable audio, portable media
- DC/DC micro-modules

1.3 EVM Ordering Options

Table 1 provides the ordering information for TPS62690/1/2/3EVM-076:

Table 1. Ordering Information for TPS62690/1/2/3EVM

Orderable EVM Number	Device Part Number	Output Voltage	Maximum Output Current
TPS62690EVM-076	TPS62690	2.85 V	500 mA
TPS62691EVM-076	TPS62691	2.2 V	600 mA
TPS62692EVM-076	TPS62692	2.85 V	800 mA
TPS62693EVM-076	TPS62693	2.2 V	800 mA

2 TPS62690/1/2/3EVM Schematic

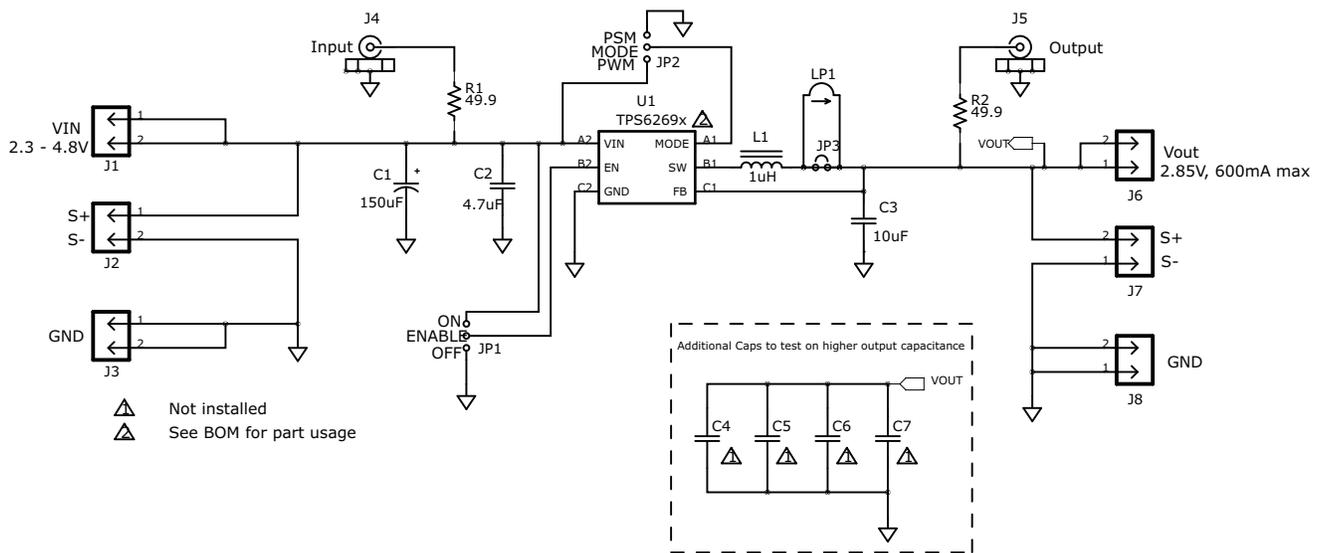


Figure 1. TPS6269xEVM Schematic

3 Connector and Test Point Descriptions

3.1 Input/Output Connectors: TPS6269xEVM

3.1.1 J1 – VIN

This header is the positive connection to the input power supply. The power supply must be connected between J1 (VIN) and J3 (GND). The leads to the input supply must be twisted and kept as short as possible. The input voltage must be between 2.3 V and 4.8 V.

3.1.2 J2 – S+/S–

J2 S+/S– are the sense connections for the input of the converter. Connect a voltmeter, sense connection of a power supply, or oscilloscope to this header.

3.1.3 J3 – GND

This header is the return connection to the input power supply. Connect the power supply between J3 (GND) and J1 (VIN). The leads to the input supply must be twisted and kept as short as possible.

3.1.4 J4

This SMA connector is connected to the input voltage of the dc/dc converter. It can be used to easily analyze the noise spectrum of the input voltage with a spectrum analyzer.

3.1.5 J5

This SMA connector is connected to the output voltage of the DC/DC converter. It can be used to easily analyze the noise spectrum of the output voltage with a spectrum analyzer.

3.1.6 J6

This header is the positive output of the step-down converter. The output voltage of the TPS62691 and TPS62690 devices are fixed to 2.2 V and 2.85 V respectively.

3.1.7 J7

J7 S+/S- are the sense connections for the output of the converter. Connect a voltmeter, sense connection of an electronic load, or oscilloscope to this header.

3.1.8 J8

J8 is the return connection of the converter. A load can be connected between J8 and J6 (VOUT).

3.2 Jumpers and Switches

3.2.1 JP1 – ENABLE

This jumper enables/disables the converter on the EVM. Placing a shorting jumper between ENABLE and ON turns on the converter. Placing a shorting jumper between ENABLE and OFF disables the converter.

3.2.2 JP2 – MODE

This jumper enables/disables the power-saving mode under light loads. Placing a shorting jumper between MODE and PWM disables the power-saving mode. If the power-save mode is disabled, the converter operates in forced PWM mode over the entire load current range.

Placing a shorting jumper between MODE and PSM enables the power-saving mode. This causes the device to operate in power-saving mode under light loads and in PWM mode in heavy loads. See the specific device data sheet for detailed information.

3.2.3 JP3 and LP1

This is the inductor current loop. In order to measure the inductor current, the trace on JP3 needs to be cut and a wire needs to be placed between the two ends of LP1. If the loop is no longer needed, remove the wire on LP1 and shorting JP3.

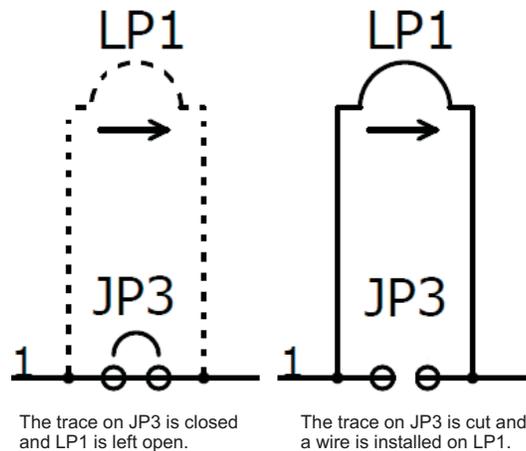


Figure 2. JP3 and LP1 Set Up

4 Test Configurations

4.1 Hardware Setup

Figure 3 illustrates a typical hardware test configuration.

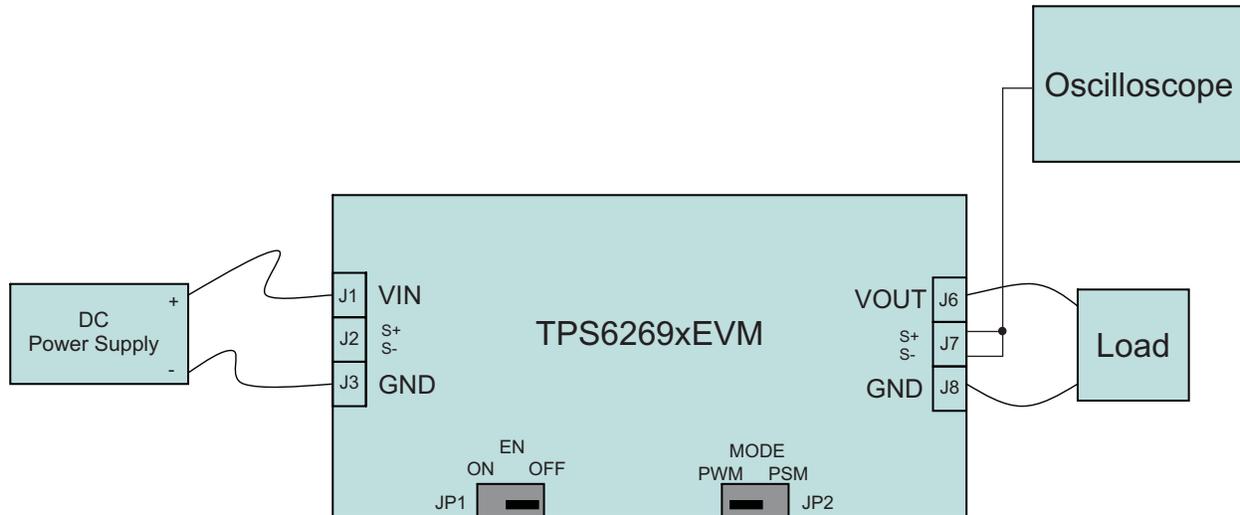


Figure 3. Hardware Board Connection

4.2 Procedure

Follow these procedures when configuring the EVM for testing.

CAUTION

Many of the components on the TPS62690EVM-076 and TPS62691EVM-076 are susceptible to damage by electrostatic discharge (ESD). Customers are advised to observe proper ESD handling precautions when unpacking and handling the EVM, including the use of a grounded wrist strap, bootstraps, or mats at an approved ESD workstation. An electrostatic smock and safety glasses should also be worn.

1. Work at an ESD workstation. Make sure that any wrist straps, bootstraps, or mats are connected and secure the user to earth ground before power is applied to the EVM. Electrostatic smock and safety glasses should also be worn.
2. Connect a dc power supply between J1 and J3 on the TPS62690/1/2/3EVM. Note that the input voltage must range from 2.3 V to 4.8 V. Keep the wires from the input power supply to the EVM twisted and as short as possible.
3. Connect a dc voltmeter or oscilloscope to the output sense connection of the EVM.
4. A load can be connected between J6 and J8 on the TPS62690/1/2/3EVM.
5. To enable the converter, connect the shorting jumper on JP1 between ENABLE and ON located on the TPS62690/1/2/3EVM.
6. Use jumper JP2 to switch the TPS62690/1/2/3EVM between power-save mode under light loads and forced PWM mode.

5 TPS62691EVM Test Data

Figure 4 through Figure 9 present typical performance graphs for the TPS62690/1/2/3EVM. Actual performance data can be affected by measurement techniques and environmental variables; therefore, these curves are presented for reference and may differ from actual results obtained by some users.

5.1 Efficiency

Figure 4 shows the typical efficiency performance for the TPS62691EVM.

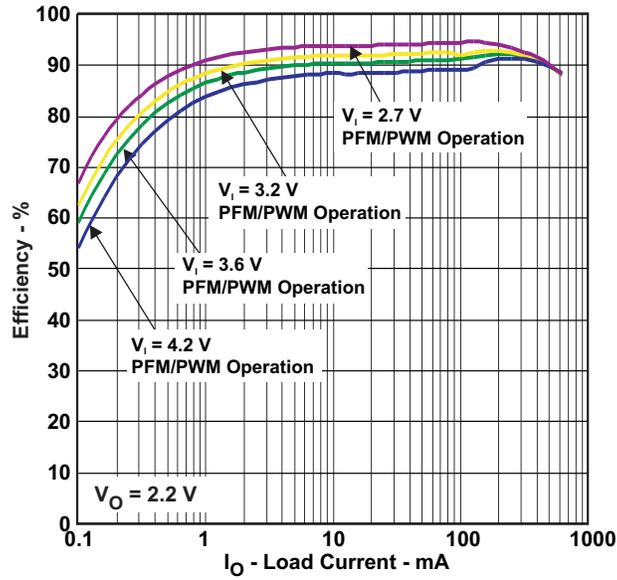


Figure 4. Efficiency vs Load current for the TPS62691

5.2 Start-up

Figure 5 and Figure 6 show the typical start-up performance for different loads for the TPS62691EVM board.

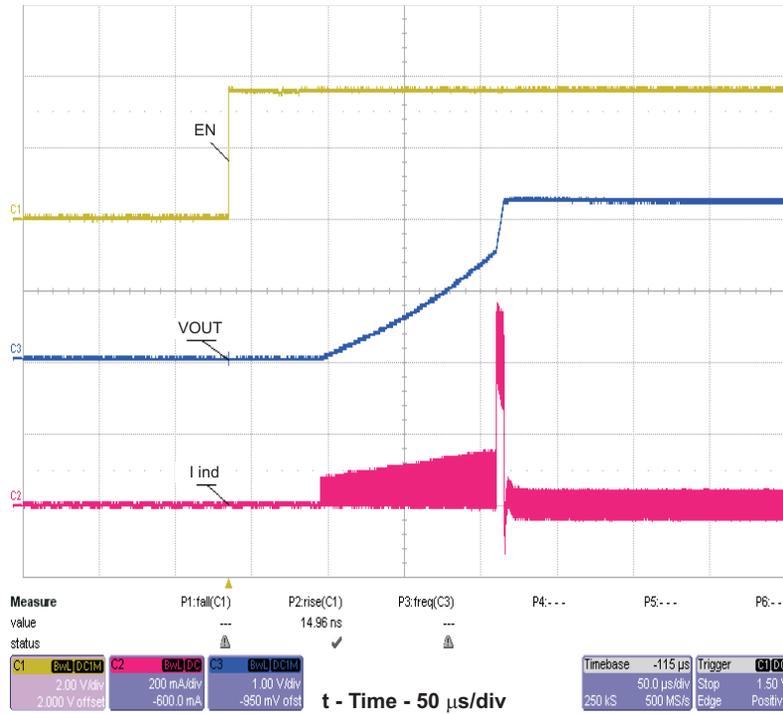


Figure 5. TPS62691 Start-Up Using EN With No Load, Vin = 3.6 V and Vout = 2.2 V

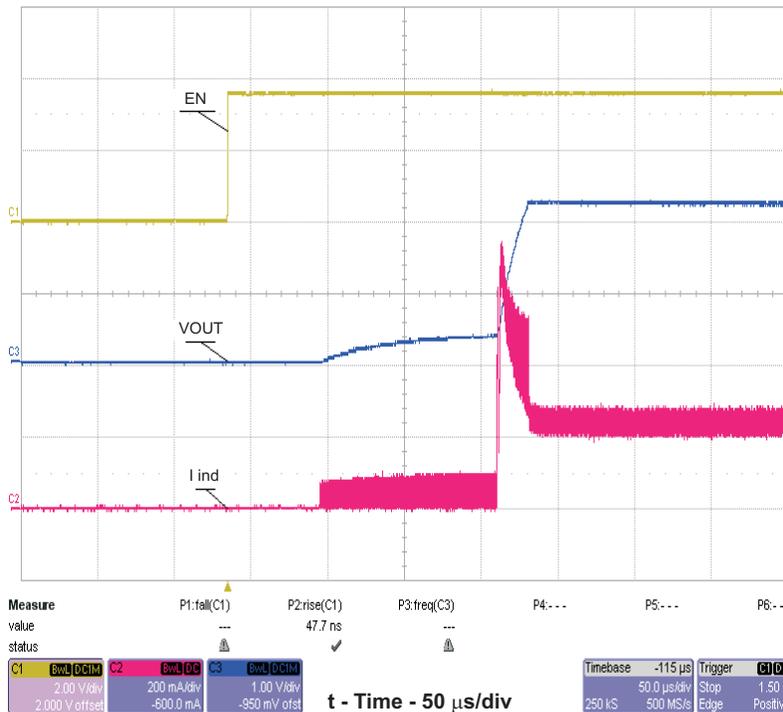


Figure 6. TPS62691 Start-up Using EN With 200-mA Load, Vin = 3.6 V and Vout = 2.2 V

5.3 Output Voltage Ripple (Power-Save Mode)

Figure 7 illustrates the typical output voltage ripple for the TPS62691EVM in power-save mode.

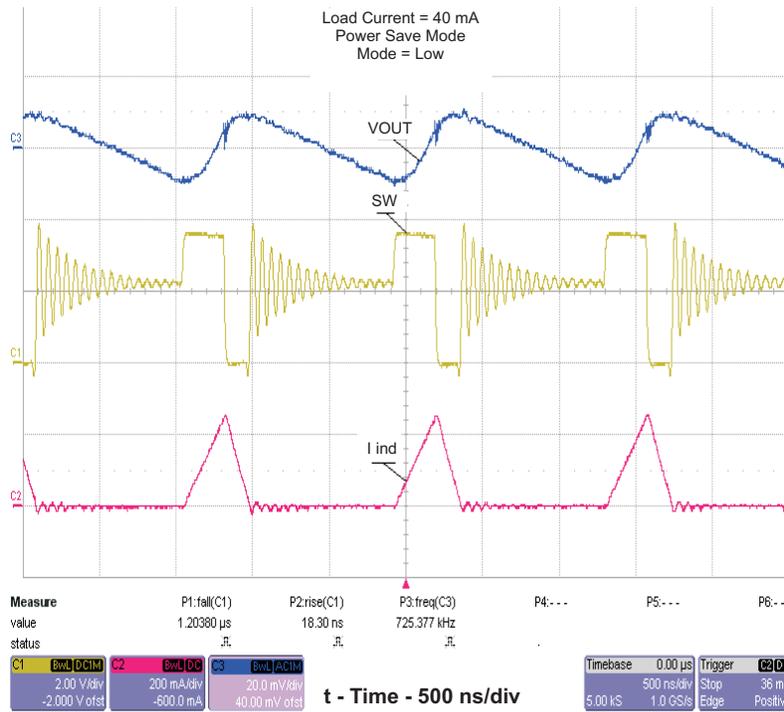


Figure 7. Power-Save Mode Ripple at $V_{in} = 3.6$ V and $V_{out} = 2.2$ V With $I_{load} = 40$ mA

5.4 Output Voltage Ripple (PWM)

Figure 8 and Figure 9 illustrate a typical output voltage ripple for the TPS62691 in PWM mode

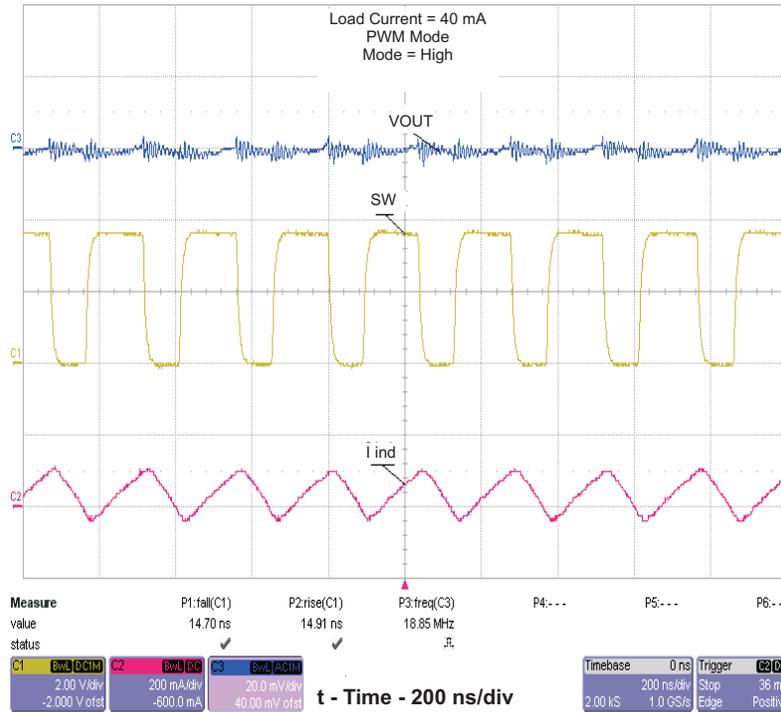


Figure 8. PWM Mode Ripple at Vin = 3.6 V and Vout = 2.2 V With Iload = 40 mA

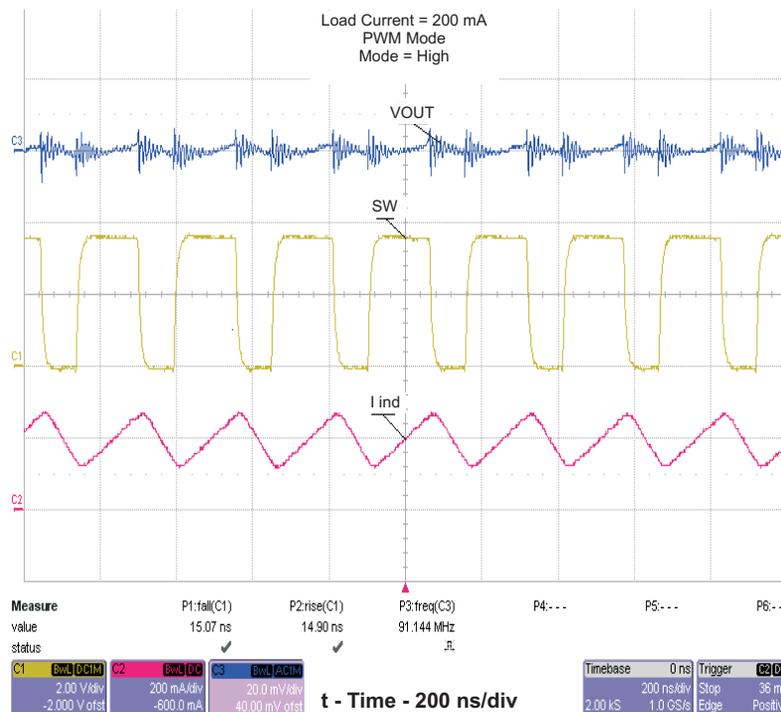


Figure 9. PWM Mode Ripple at Vin = 3.6 V and Vout = 2.2 V With Iload = 200 mA

6 TPS62690/1/2/3EVM Assembly Drawing and Layout

Figure 10 through Figure 14 show the design of the TPS62690/1/2/3EVM-076 printed-circuit boards (PCB). The EVM has been designed using a two-layer, 1-ounce copper-clad PCB with all components in an active area on the top side of the board. Moving components to both sides of the PCB or using additional internal layers can offer additional size reduction for space-constrained systems.

NOTE: Board layouts are not to scale. These figures show how the board is laid out; they are not intended to be used for manufacturing TPS62690/1/2/3EVM-076 PCBs. Note the connection of the TPS6269x feedback (FB) pin. It is recommended that the FB pin be connected directly to the inductor, not directly on the VOUT connection of the output capacitor. The connection to the inductor provides better transient response performance.

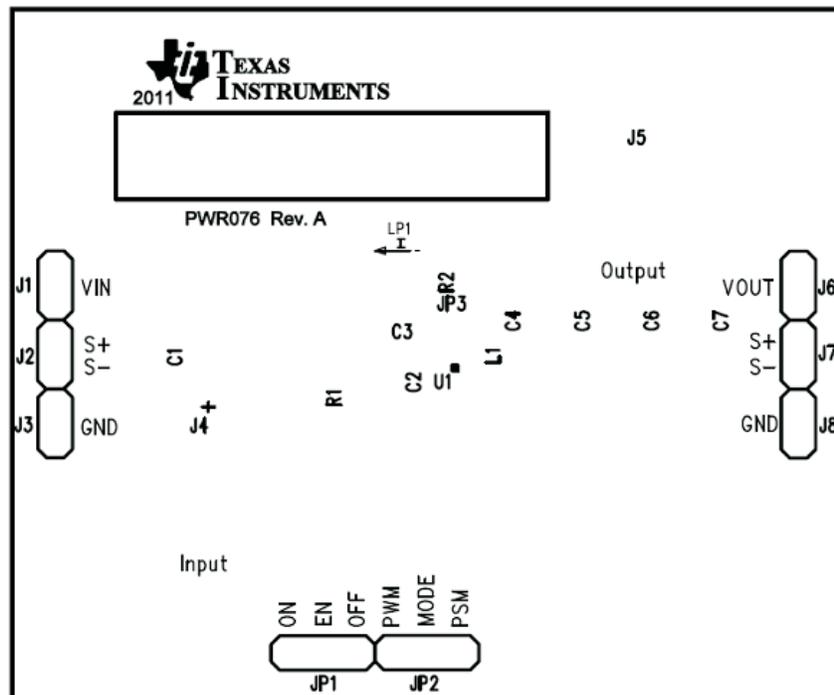


Figure 10. TPS62690/1/2/3EVM Component Placement (Top View)

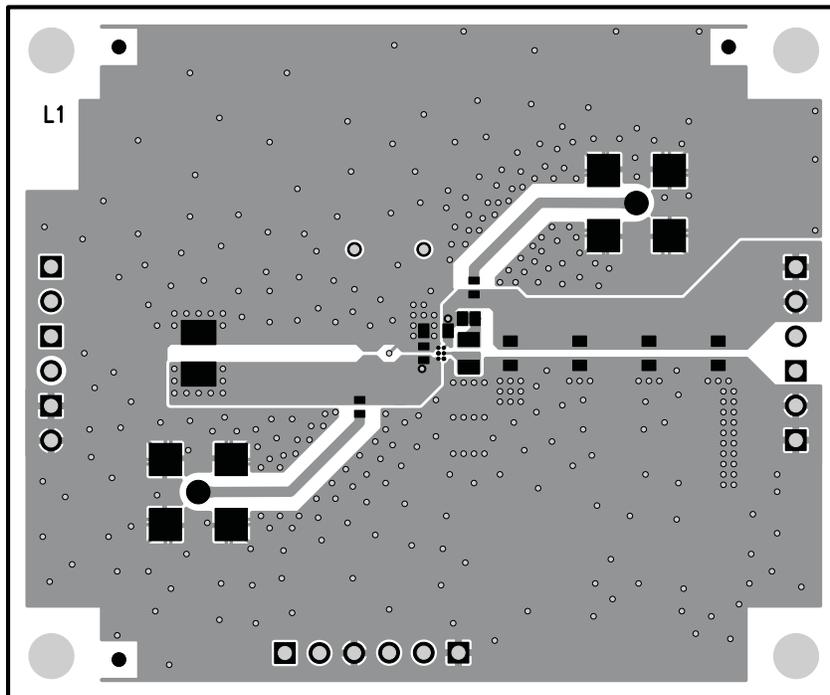


Figure 11. TPS62690/1/2/3EVM Top-Side Copper (Top View)

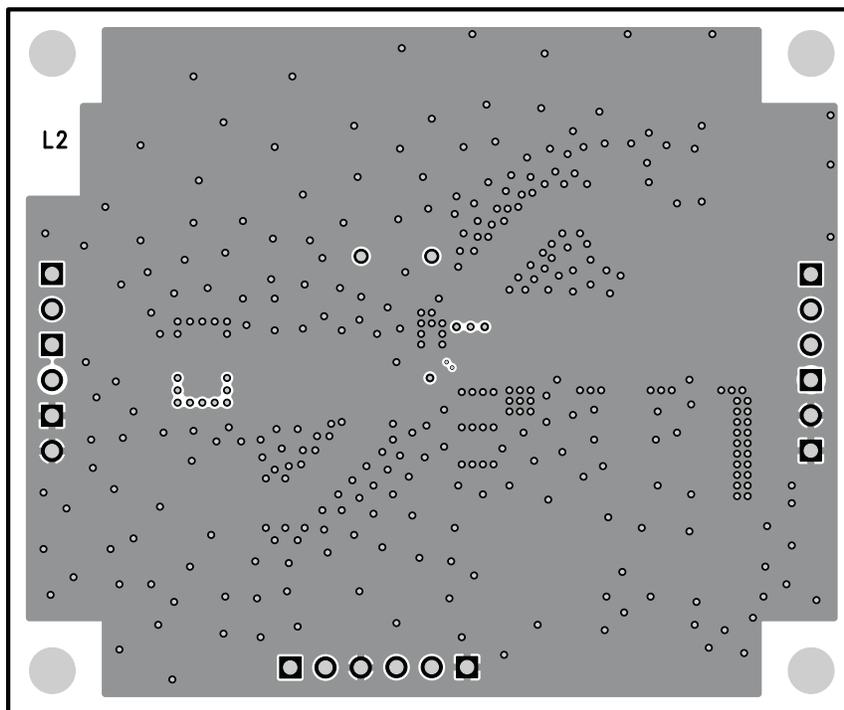


Figure 12. TPS62690/1/2/3EVM L2-Side Copper

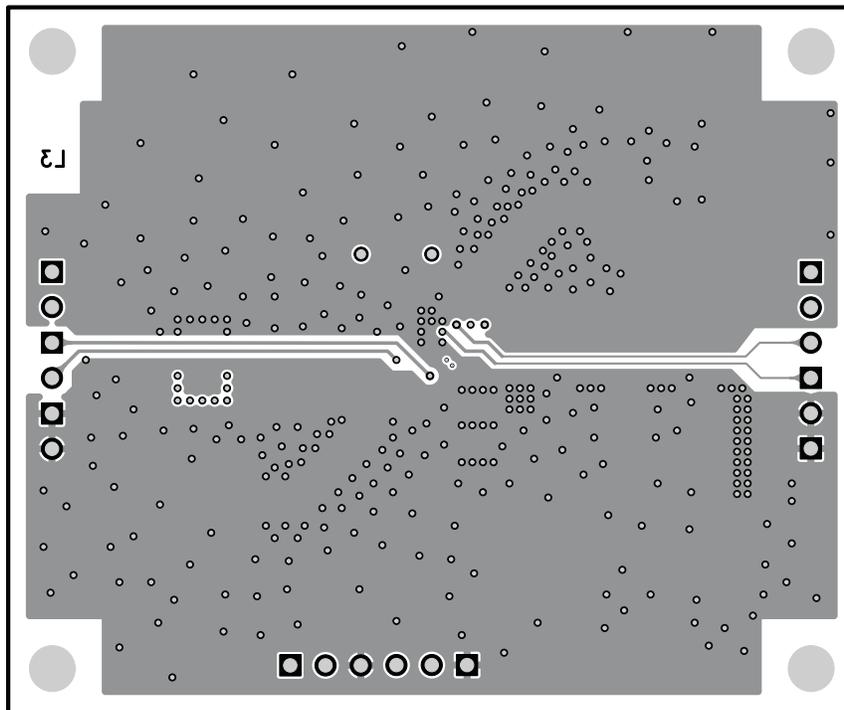


Figure 13. TPS62690/1/2/3EVM L3-Side Copper

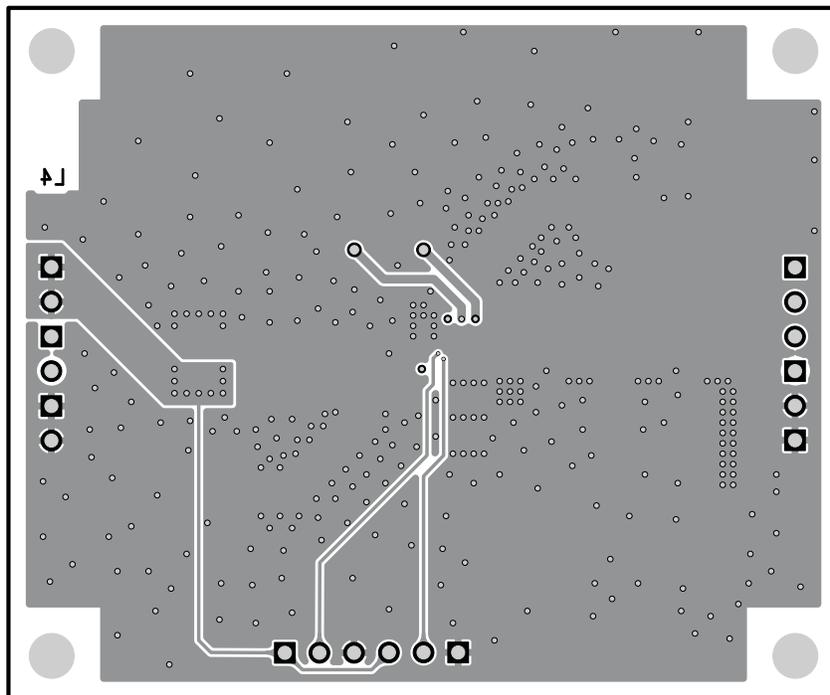


Figure 14. TPS62690/1/2/3EVM Bottom-Side Copper (Bottom View)

7 TPS62690/1/2/3EVM Bill of Material

Table 2 lists the bill of materials for the TPS6269xEVM.

Table 2. Bill of Material for the TPS62690/1/2/3EVM

TPS62690	TPS62691	TPS62692	TPS62693	RefDes	Value	Size	Description	Part Number
Qty	Qty	Qty	Qty					
1	1	1	1	C2 ⁽¹⁾	4.7 μ F	402	Capacitor, Ceramic, 6.3 V, X5R, 20%	GRM155R60J475M
1	1	1	1	C3 ⁽¹⁾	10 μ F	603	Capacitor, Ceramic, 6.3 V, X5R, 20%	GRM188R60J106ME84
4	4	4	4	C4, C5, C7, C8	Open	603	Capacitor, Ceramic	STD
1	1	1	1	C1	150 μ F	0.110 x 0.215 in	Capacitor, Tantalum Poly, 6.3 V, 70 m Ω , 20%	T520B157M006ATE070
1	1	1	1	L1 ⁽¹⁾	1 μ H	2012	Inductor, SMT, 0.9 A, 180 m Ω	MDT2012-CH1R0A
2	2	2	2	R1, R2	49.9 Ω	402	Resistor, Chip, 1/16 W, 1%	STD
1	0	0	0	U1	TPS62690YFF	WCSP-6	IC, 2.85-V, 500-mA, 4-MHz Synchronous Step-Down Converter	TPS62690YFF
0	1	0	0	U1	TPS62691YFF	WCSP-6	IC, 2.2-V, 600-mA, 4-MHz Synchronous Step-Down Converter	TPS62691YFF
0	0	1	0	U1	TPS62692YFF	WCSP-6	IC, 2.85-V, 800-mA, 3-MHz Synchronous Step-Down Converter	TPS62692YFF
0	0	0	1	U1	TPS62693YFF	WCSP-6	IC, 2.2-V, 800-mA, 3-MHz Synchronous Step-Down Converter	TPS62693YFF

⁽¹⁾ These are recommended but can be replaced with specified parts listed in the datasheet.

8 Marking Information for this EVM

Table 3. Marking Information

Assembly Number	Marking Text
PWR076-001	TPS62690EVM-076
PWR076-002	TPS62691EVM-076
PWR076-003	TPS62692EVM-076
PWR076-004	TPS62693EVM-076

Evaluation Board/Kit Important Notice

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive.**

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein.**

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on TI's environmental and/or safety programs, please contact the TI application engineer or visit www.ti.com/esh.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

FCC Warning

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

EVM Warnings and Restrictions

It is important to operate this EVM within the input voltage range of 2.3 V to 4.8 V and the output voltage range of fixed 2.2 V ('691) to fixed 2.85 V ('690).

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 60° C. The EVM is designed to operate properly with certain components above 60° C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2012, Texas Instruments Incorporated