



SHENZHEN HAOLIN ELECTRONICS TECHNOLOGY CO., LTD


## TO-220 Plastic-Encapsulate Voltage Regulator

**7805** Three-terminal positive voltage regulator

## FEATURES

Maximum Output current  $I_{OM}$ : 1.5 AOutput voltage  $V_o$ : 5V

Continuous total dissipation

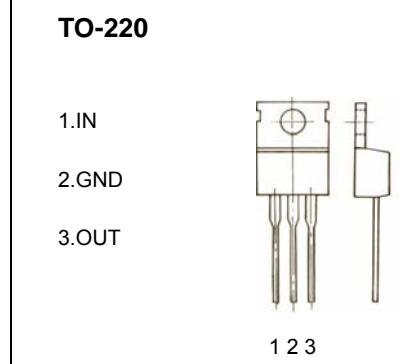 $P_D$ : 1.5 W ( $T_a = 25^\circ C$ )15 W( $T_c = 25^\circ C$ )


## ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	35	V
Thermal resistance junction-air	$R_{\theta JA}$	65	°C/W
Thermal resistance junction-cases	$R_{\theta JC}$	5	°C/W
Operating Junction Temperature Range	$T_{OPR}$	0-125	°C
Storage Temperature Range	$T_{STG}$	-65-150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_i=10V, I_o=500mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )







Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_o$	25°C	4.8	5.0	5.2	V
		7V≤ $V_i$ ≤20V, $I_o=5mA-1A$ , $P\leq 15W$	0-125°C	4.75	5.00	5.25
Load Regulation	$\Delta V_o$	$I_o=5mA-1.5A$	25°C	9	100	mV
		$I_o=250mA-750mA$	25°C	4	50	mV
Line regulation	$\Delta V_o$	7V≤ $V_i$ ≤25V	25°C	4	100	mV
		8V≤ $V_i$ ≤12V	25°C	1.6	50	mV
Quiescent Current	$I_q$	25°C		5	8	mA
Quiescent Current Change	$\Delta I_q$	7V≤ $V_i$ ≤25V	0-125°C	0.3	1.3	mA
		5mA≤ $I_o$ ≤1A	0-125°C	0.03	0.5	mA
Output Noise Voltage	$V_N$	10Hz≤f≤100KHz	25°C	42		uV
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5mA$	0-125°C	-1.1		mV/°C
Ripple Rejection	$RR$	8V≤ $V_i$ ≤18V, f=120Hz	0-125°C	62	73	dB
Dropout Voltage	$V_d$	$I_o=1A$	25°C	2		V
Output resistance	$R_o$	f=1KHz	25°C	10		mΩ
Short Circuit Current	$I_{sc}$		25°C	230		mA
Peak Current	$I_{pk}$		25°C	2.2		A

## TYPICAL APPLICATION

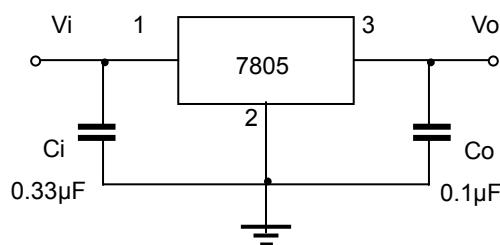

## Typical Characteristics

**78XX**

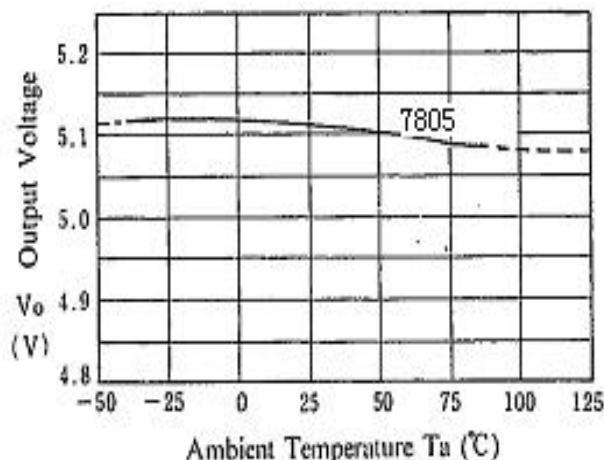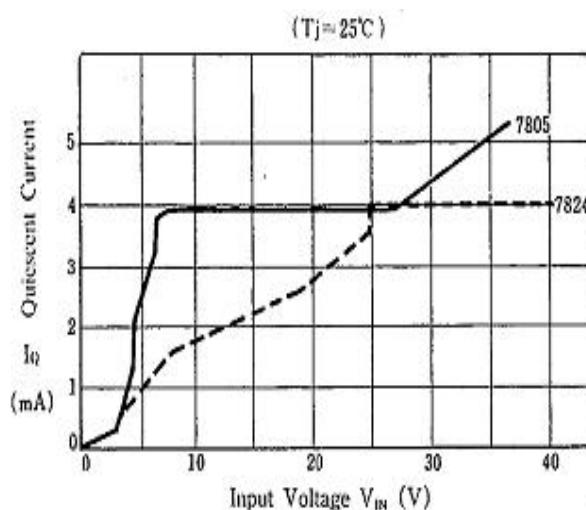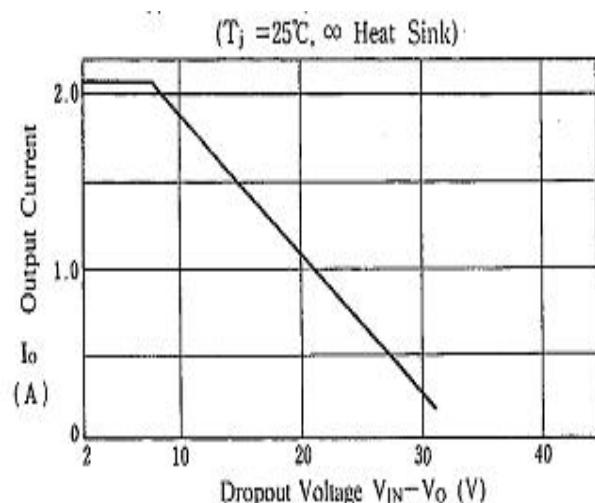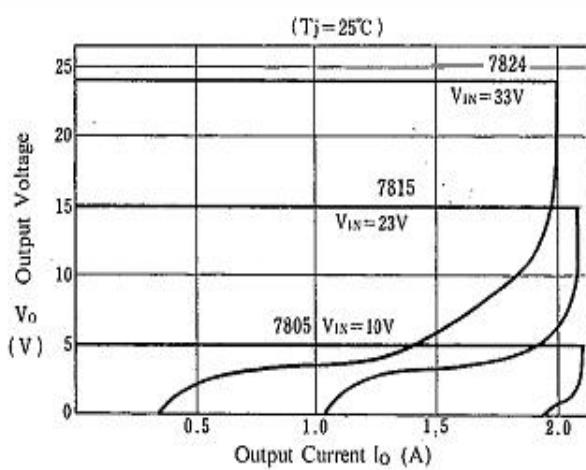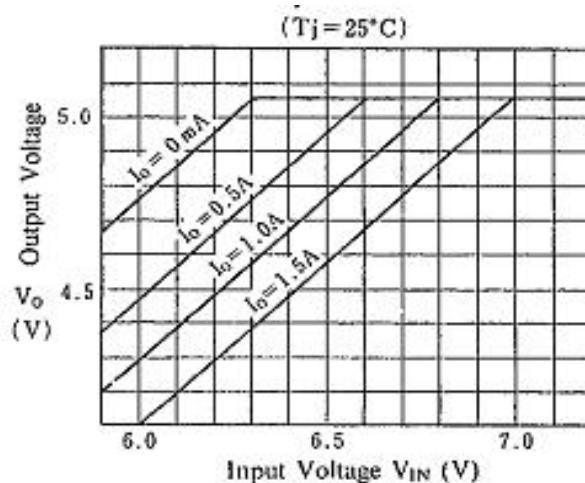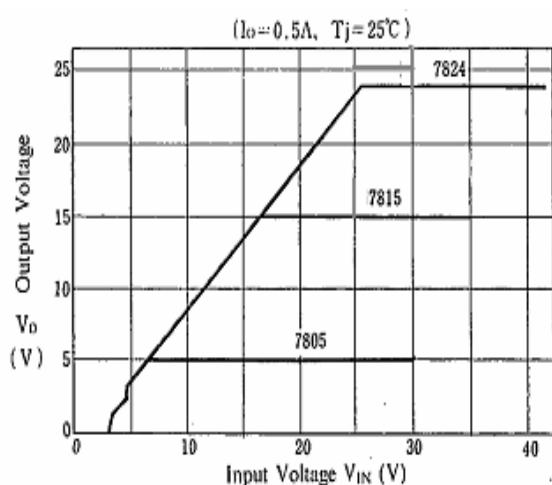

### PD-TA

