

No.2248B

LA4533M


Power Amplifier for 3V Headphone Stereos

#### **Features**

- · Low current consumption.
- ·  $16\Omega$  load drive capability.
- Excellent reduced voltage characteristics.
- · Excellent power supply ripple rejection.
- Minimum number of external parts required (no input capacitor, feedback capacitor required).
- · Applicable to radio sets because of high voltage gain.
- · Less harmonic interference in radio band.
- · On-chip power switch function, muting function.

# **Package Dimensions**

(unit:mm) 3086A-MFP10S

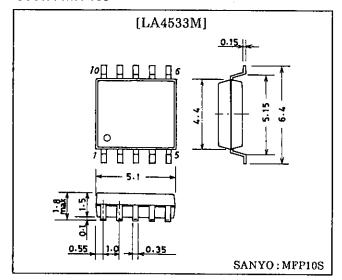

### **Specifications**

Maximum Ratings at Ta = 25°C				Unit
Maximum Supply Voltage	V <sub>CC</sub> max	Quiescent	4.5	V
Allowable Power Dissipation	Pd max	•	300	mW
Operating Temperature	Topr		-20  to  +75	$^{\circ}\mathrm{C}$
Storage Temperature	Tstg		-40  to  +125	°C
Operating Conditions at Ta = 25	5°C			Unit

### Operating Characteristics at Ta = 25°C, $R_L = 16\Omega$ , $R_g = 600\Omega$ , See specified Test Circuit.


			min	typ	max	Unit		
Quiescent Current	Icco (1)	$V_{\rm CC}$ = 2.4V, quiescent		5.4	10	mΑ		
	Icco (2)	$V_{CC} = 4.5 \text{V,pin } 10 \rightarrow \text{GND}$		1.1	2.0	mΑ		
	Icco (3)	$V_{CC} = 4.5 \text{V,pin } 1 \rightarrow \text{GND}$			1.0	$\mu$ A		
Voltage Gain	VG (1)	$V_{CC} = 2.4V$ , $f = 1kHz$ , $V_{O} = -10dBm$	30	32	34	dB		
	VG (2)	$V_{CC} = 1.6V, f = 1kHz, V_{O} = -20dBm$	29	32	34	dΒ		
Voltage Gain Difference	$\Delta VG(1)$	$V_{CC} = 2.4V, f = 1kHz, V_{O} = -10dBm$			1.0	dB		
	$\Delta VG(2)$	$V_{CC} = 1.6V, f = 1kHz, V_{O} = -20dBm$			1.0	dB		
	Continued on nout name							


Continued on next page.

Continued from preceding page.				typ	max	Unit
Total Harmonic Distortion	THD	$V_{CC} = 2.0 V, f = 1 kHz, P_{O} = 1 mW$		0.5	1.5	%
Output Power	$P_{O}$	$V_{CC} = 3.0V, f = 1kHz, THD = 10\%$	20	40		mW
Crosstalk	CT	$V_{CC} = 2.4V, f = 100Hz, Rg = 1k\Omega$ $V_{O} = -10dB$	40	50		dB
Ripple Rejection	SVRR	$V_{CC} = 1.6V, f = 100Hz, Rg = 1k\Omega$ $V_{R} = -20dBm, BPF = 100Hz$	45	60		dB
Output Noise Voltage	$V_{NO}$	$V_{CC} = 4.5 \text{V}, \text{Rg} = 1 \text{k}\Omega,$ BPF = 20Hz to 20kHz		62	100	$\mu V$
Power OFF Effect	V <sub>O</sub> (off)	$V_{CC} = 1.6V$ , $f = 100Hz$ , $pin1 \rightarrow GND$ , $V_{IN} = -10dB$			-80	dB
Muting Effect	$V_{O}(MT)$	***			-80	dB
Power ON Current Sensitivity	I <sub>1</sub> (on)	$V_{CC} = 1.5V, V5 \ge 0.85V$		0.05	1.0	$\mu$ A
Power OFF Voltage Sensitivity	V <sub>1</sub> (off)	$V_{CC} = 1.5V, V5 \le 0.1V$	0.5	0.6		V
Muting OFF Current Sensitivity	I <sub>10</sub> (off)	$V_{CC} = 1.5 \text{ V}, V5 \ge 0.85 \text{ V}$		0.2	1.0	$\mu$ A
Muting ON Voltage Sensitivity	V <sub>10</sub> (on)	$V_{CC} = 1.5V, V5 \le 0.1V$	0.5	0.65		V


Note) The quiescent current is respresented by the current flowing into pin 6. The respective maximum currents flowing into pin 1 and pin 10 are calculated by (pinvoltage -0.5) / 16 [V/k $\Omega$ ] and the total current increases by these current values.

## **Equivalent Circuit Block Diagram and Application Circuit**

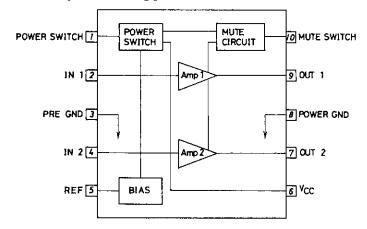

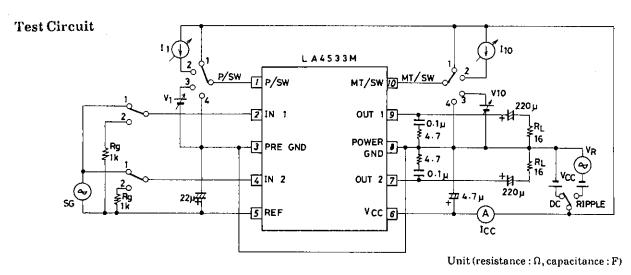

## Sample Application Circuit

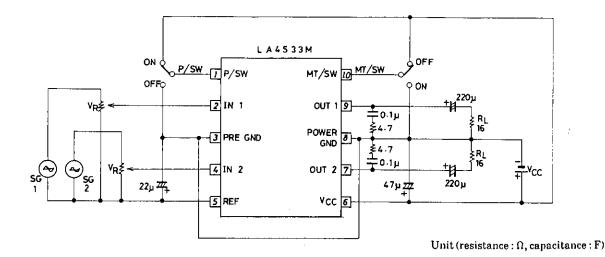

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall;
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
  - 2 Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of June, 1995. Specifications and information herein are subject to change without notice.