

SPTECH Product Specification

SPTECH Silicon NPN Darlington Power Transistor **BDW23/A/B/C**

DESCRIPTION



- Collector Current $-I_C = 6A$
- High DC Current Gain $-h_{FE} = 750(\text{Min}) @ I_C = 2A$
- Complement to Type BDW24/A/B/C

APPLICATIONS

- Designed for hammer drivers, audio amplifiers applications

ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT	
V_{CER}	Collector-Emitter Voltage	BDW23	45	V
		BDW23A	60	
		BDW23B	80	
		BDW23C	100	
V_{CEO}	Collector-Emitter Voltage	BDW23	45	V
		BDW23A	60	
		BDW23B	80	
		BDW23C	100	
V_{EBO}	Emitter-Base Voltage	5	V	
I_C	Collector Current-Continuous	6	A	
I_{CM}	Collector Current-Peak	8	A	
I_B	Base Current-Continuous	0.2	A	
P_C	Collector Power Dissipation @ $T_C = 25^\circ\text{C}$	50	W	
T_J	Junction Temperature	150	$^\circ\text{C}$	
T_{stg}	Storage Temperature Range	-65~150	$^\circ\text{C}$	

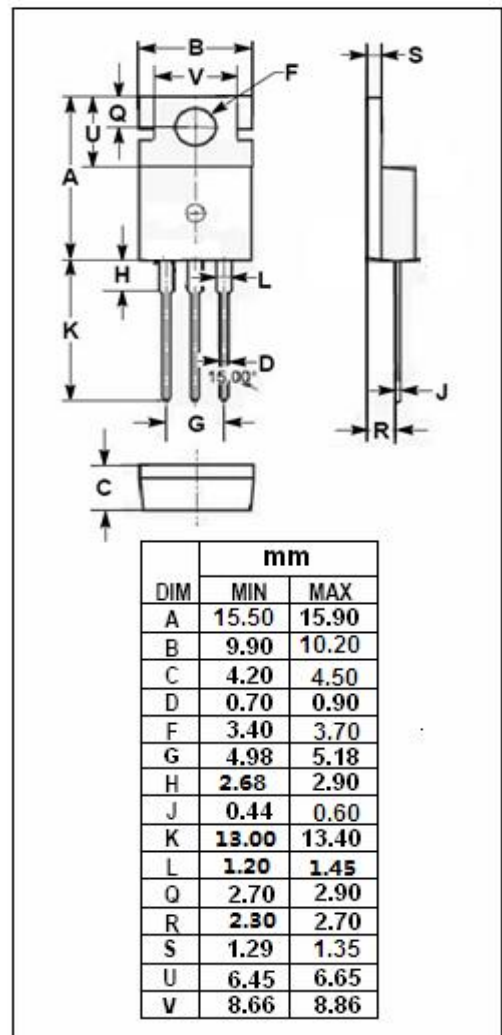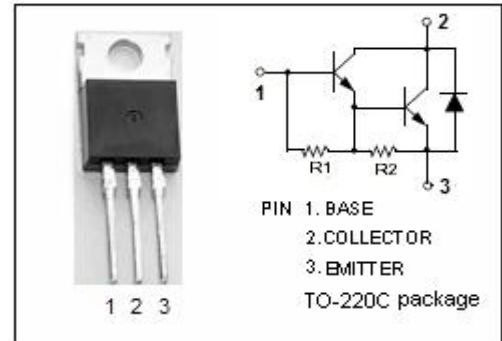

SPTECH Silicon NPN Darlington Power Transistor BDW23/A/B/C

ELECTRICAL CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT	
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	BDW23	45			V	
		BDW23A	60				
		BDW23B	80				
		BDW23C	100				
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C= 2A; I_B= 8mA$			2	V	
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C= 6A; I_B= 60mA$			3	V	
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C= 2A; I_B= 8mA$			2.5	V	
$V_{BE(on)-1}$	Base-Emitter On Voltage	$I_C= 1A; V_{CE}= 3V$			2.5	V	
$V_{BE(on)-2}$	Base-Emitter On Voltage	$I_C= 6A; V_{CE}= 3V$			3	V	
V_{ECF}	C-E Diode Forward Voltage	$I_F= 2A$			1.8	V	
I_{CEO}	Collector Cutoff Current	BDW23	$V_{CE}= 30V; I_B= 0$			0.5	mA
		BDW23A	$V_{CE}= 30V; I_B= 0$				
		BDW23B	$V_{CE}= 40V; I_B= 0$				
		BDW23C	$V_{CE}= 50V; I_B= 0$				
I_{CBO}	Collector Cutoff Current	BDW23	$V_{CB}= 45V; I_E= 0$			0.2	mA
		BDW23A	$V_{CB}= 60V; I_E= 0$				
		BDW23B	$V_{CB}= 80V; I_E= 0$				
		BDW23C	$V_{CB}= 100V; I_E= 0$				
I_{EBO}	Emitter Cutoff Current	$V_{EB}= 5V; I_C= 0$			2	mA	
h_{FE-1}	DC Current Gain	$I_C= 1A; V_{CE}= 3V$	1000				
h_{FE-2}	DC Current Gain	$I_C= 2A; V_{CE}= 3V$	750		20000		
h_{FE-3}	DC Current Gain	$I_C= 6A; V_{CE}= 3V$	100				