




LOW VOLTAGE AUDIO POWER AMPLIFIER

■ DESCRIPTION

The UTC **LM386** is a power amplifier, designed for use in low voltage consumer applications. The gain is internally set to 20 to keep external part count low, but the addition of an external resistor and capacitor between pin 1 and pin 8 will increase the gain to any value up from 20 to 200 dB.

The inputs are ground referenced while the output automatically biases to one-half the supply voltage. The quiescent power drain is only 24 milliwatts when operating from a 6 volt supply, making the **LM386** ideal for battery operation.

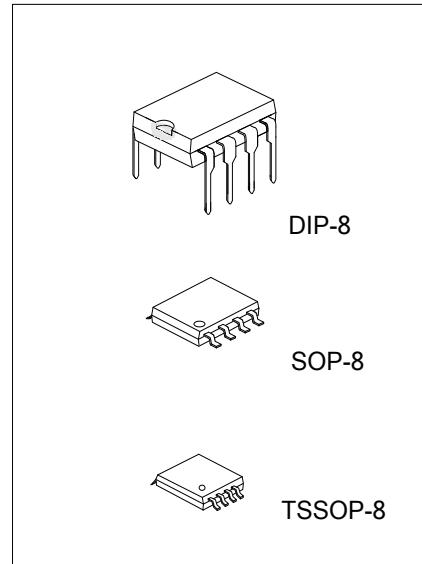

■ FEATURES




- *Battery Operation
- *Minimum External Parts
- *Wide Supply Voltage Range: 4V~12V
- *Low Quiescent Current Drain: 4mA
- *Voltage Gains: 20~200dB
- *Ground Referenced Input
- *Self-Centering Output Quiescent Voltage
- *Low Distortion: 0.2% (Av=20, Vs=6V, RL=8Ω, Po=125mW, f=1kHz)

■ ORDERING INFORMATION


| Ordering Number | | Package | Packing |
|-----------------|--------------|---------|-----------|
| Lead Free | Halogen Free | | |
| LM386L-D08-T | LM386G-D08-T | DIP-8 | Tube |
| LM386L-S08-R | LM386G-S08-R | SOP-8 | Tape Reel |
| LM386L-P08-R | LM386G-P08-R | TSSOP-8 | Tape Reel |

| | | |
|--------------|--|--|
| LM386G-D08-T | <ul style="list-style-type: none">(1)Packing Type(2)Package Type(3)Green Package | <ul style="list-style-type: none">(1) T: Tube, R: Tape Reel(2) D08: DIP-8, S08: SOP-8, P08: TSSOP-8(3) G: Halogen Free and Lead Free, L: Lead Free |
|--------------|--|--|


■ MARKING
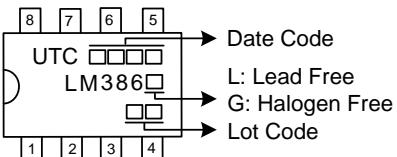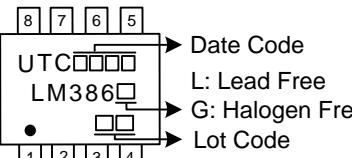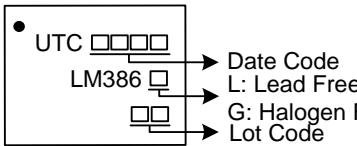
| PACKAGE | MARKING |
|---------|--|
| DIP-8 |  <p>8 7 6 5 UTC LM386 1 2 3 4</p> <p>Date Code L: Lead Free G: Halogen Free Lot Code</p> |
| SOP-8 |  <p>8 7 6 5 UTC LM386 1 2 3 4</p> <p>Date Code L: Lead Free G: Halogen Free Lot Code</p> |
| TSSOP-8 |  <p>UTC LM386 1 2 3 4</p> <p>Date Code L: Lead Free G: Halogen Free Lot Code</p> |

■ PIN CONFIGURATION

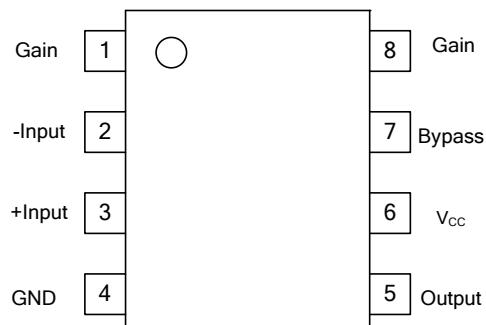

■ BLOCK DIAGRAM

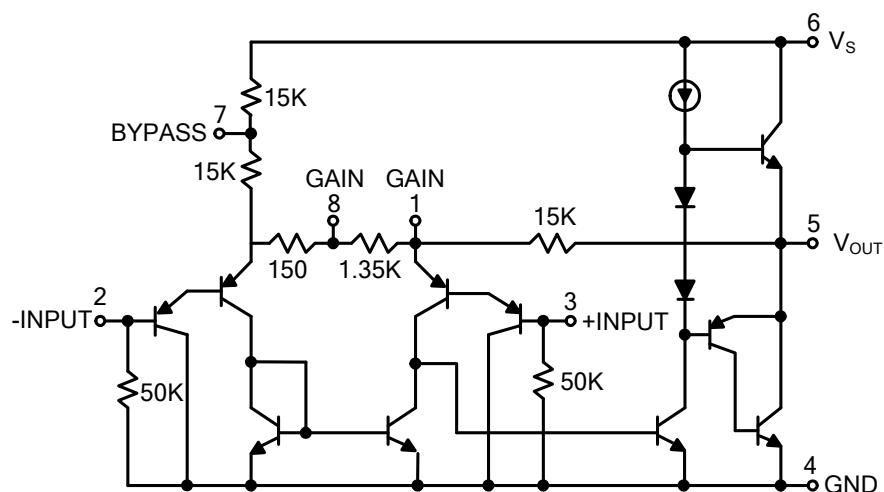

■ ABSOLUTE MAXIMUM RATINGS

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------|-----------|---------------|------|
| Supply Voltage | V_{CC} | 15 | V |
| Input Voltage | V_{IN} | -0.4V ~ +0.4V | V |
| Power Dissipation | DIP-8 | 1250 | mW |
| | SOP-8 | 600 | mW |
| | TSSOP-8 | 600 | mW |
| Junction Temperature | T_J | +125 | °C |
| Operating Temperature | T_{OPR} | -40 ~ +85 | °C |
| Storage Temperature | T_{STG} | -40 ~ +150 | °C |

Note:1. Absolute maximum ratings are stress ratings only and functional device operation is not implied. The device could be damaged beyond Absolute maximum ratings.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ C$, unless otherwise specified.)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------------------|------------|---|-----|-----|-----|------|
| Operating Supply Voltage | V_S | | 4 | | 12 | V |
| Quiescent Current | I_Q | $V_S=6V, V_{IN}=0$ | | 4 | 8 | mA |
| Output Power | P_{OUT} | $V_S=6V, R_L=8\Omega, THD=10\%$ | 250 | 325 | | mW |
| | | $V_S=9V, R_L=8\Omega, THD=10\%$ | 500 | 700 | | |
| Voltage Gain | G_V | $V_S=6V, f=1kHz$ $10\mu F$ from pin 1 to pin 8 | | 26 | | dB |
| Bandwidth | BW | $V_S=6V$, Pin1 and pin 8 open | | 300 | | kHz |
| Total Harmonic Distortion | THD | $P_{OUT}=125mW, V_S=6V, f=1kHz$ $R_L=8\Omega$ pin1 and pin 8 open | | 0.2 | | % |
| Rejection Ratio | RR | $V_S=6V, f=1kHz, C_{BYPASS}=10\mu F$ pin1 and pin 8 open, Referred to output | | 50 | | dB |
| Input Resistance | R_{IN} | | | 50 | | kΩ |
| Input Bias Current | I_{BIAS} | $V_S=6V$ Pin2 and pin 3 open | | 250 | | nA |

■ APPLICATION NOTES**GAIN CONTROL**

To make the **LM386** a more versatile amplifier, two pins(1and 8) are provided for gain control. With pins 1 and 8 open the $1.35\text{ k}\Omega$ resistor sets the gain at 20 (26dB), If a capacitor is put from pin 1 to 8, bypassing the $1.35\text{ k}\Omega$ resistor, the gain will go up to 200(46dB). If a resistor is placed in series with the capacitor, the gain can be set to any value from 20 to 200. Gain control can also be done by capacitively coupling a resistor (or FET) from pin 1 to ground.




Additional external components can be placed in parallel with the internal feedback resistors to tailor the gain and frequency response for individual applications. For example we can compensate poor speaker bass response by frequency shaping the feedback path. This is done with a series RC from pin 1 to 5 (paralleling the internal $15\text{ k}\Omega$ resistor). For 6 dB effective bass boost: $R=15\text{ k}\Omega$, the lowest value for good stable operation is $R=10\text{ k}\Omega$, if pin 8 is open, If pins 1 and 8 are bypassed then R as low as $2\text{ k}\Omega$ can be used. This restriction is because the amplifier is only compensated for closed-loop gains greater than 9.

INPUT BIASING




The schematic shows that both inputs are biased to ground with a $50\text{ k}\Omega$ resistor. The base current of the input transistors is about 250nA , so the inputs are at about 12.5mW when left open. If the dc source resistance driving the **LM386** is higher than $250\text{ k}\Omega$ it will contribute very little additional offset (about 2.5mW at the input, 50mW at the output).If the dc source resistance is less than $10\text{ k}\Omega$, then shorting the unused input to ground will keep the offset low (about 2.5mV at the input, 50 mV at the output). For dc source resistances between these values we can eliminate excess offset by putting a resistor from the unused input to ground, equal in value to the dc source resistance. Of course all offset problems are eliminated if the input is capacitively coupled.

When using the **LM386** with higher gains (bypassing the $1.35\text{ k}\Omega$ resistor between pins 1 and 8) it is necessary to bypass the unused input, preventing degradation of gain and possible instabilities. This is done with a $0.1\mu\text{F}$ capacitor or a short to ground depending on the dc source resistance on the driven input.


■ TYPICAL APPLICATIONS CIRCUIT

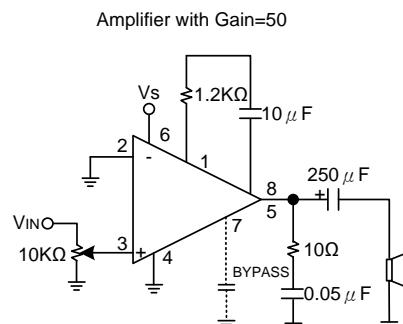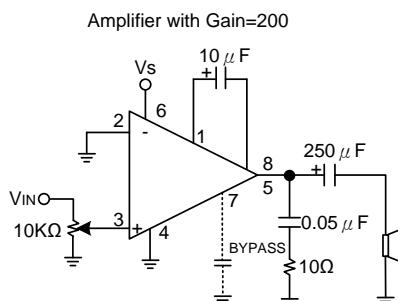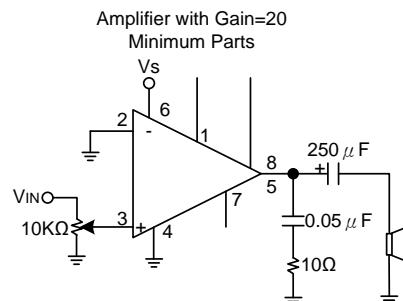

Low Distortion Power Wienbridge Oscillator

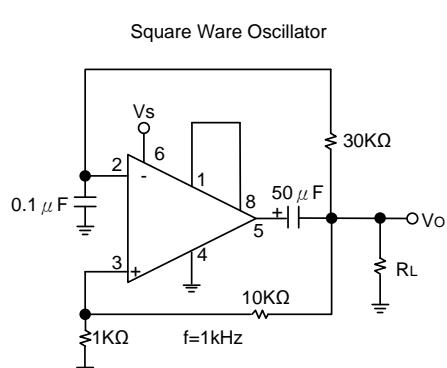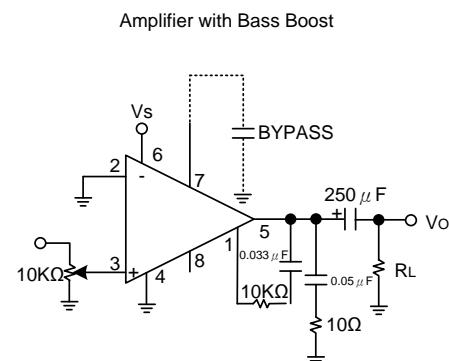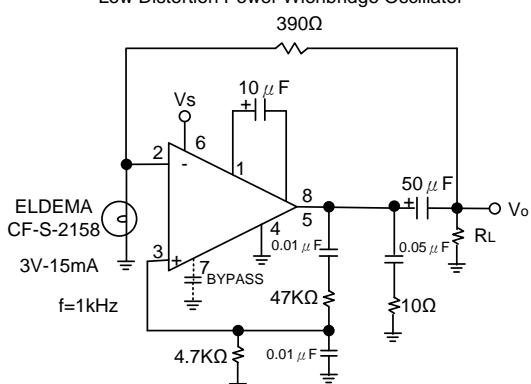

AM Radio Power Amplifier

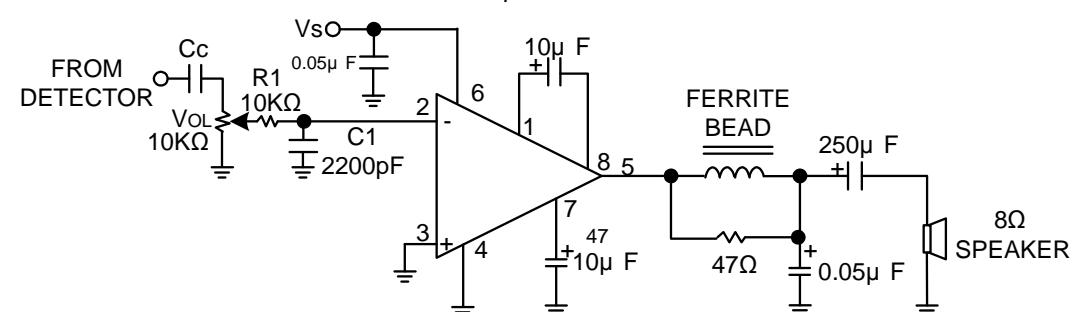

Notes: 1: Twist Supply lead and supply ground very tightly.







2: Twist speaker lead and ground very tightly.

3: Ferrite bead in Ferroxcube K5-001-001/3B with 3 turns of wire.





4: R1C1 band limits input signals.

5: All components must be spaced very closely to IC.

■ TYPICAL CHARACTERISTICS

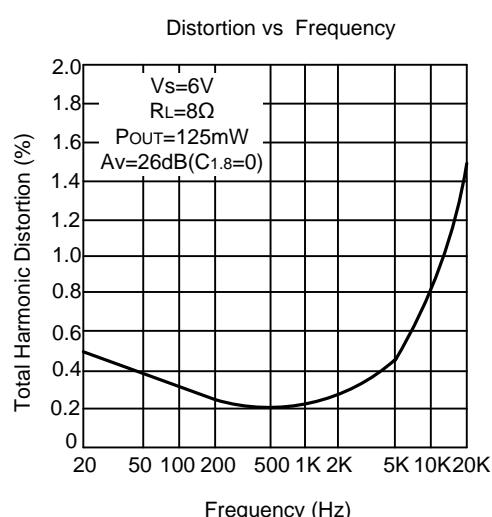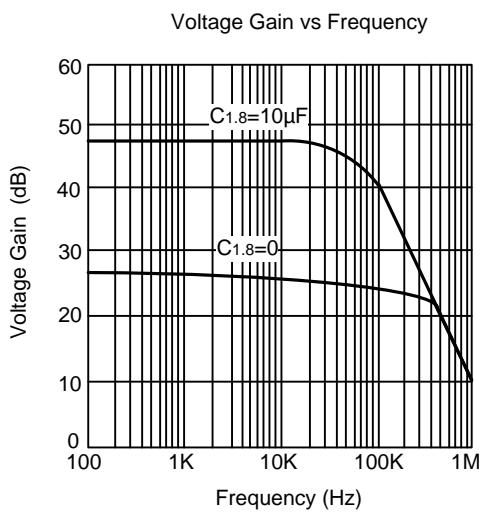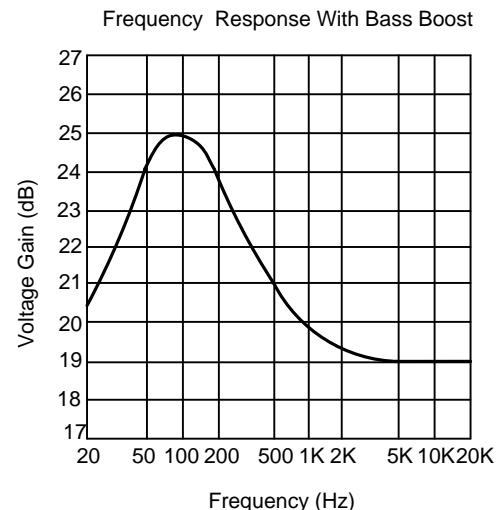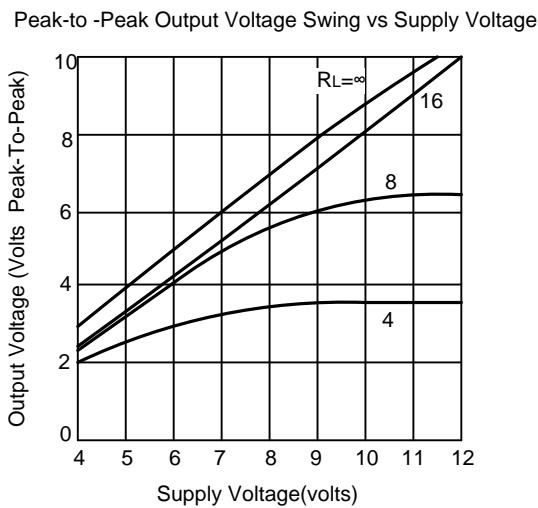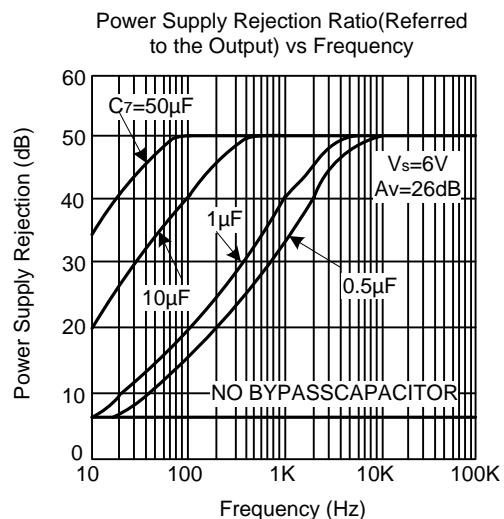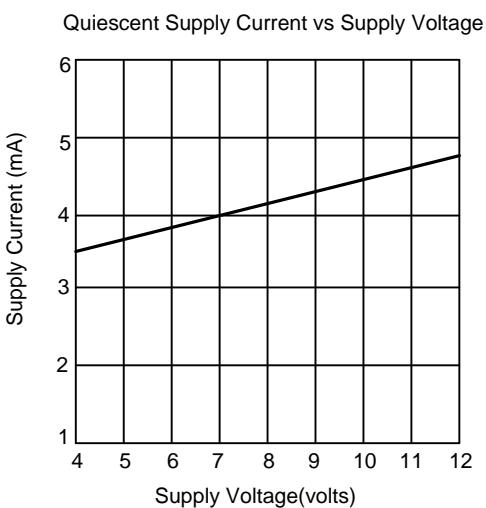

■ TYPICAL CHARACTERISTICS(cont.)

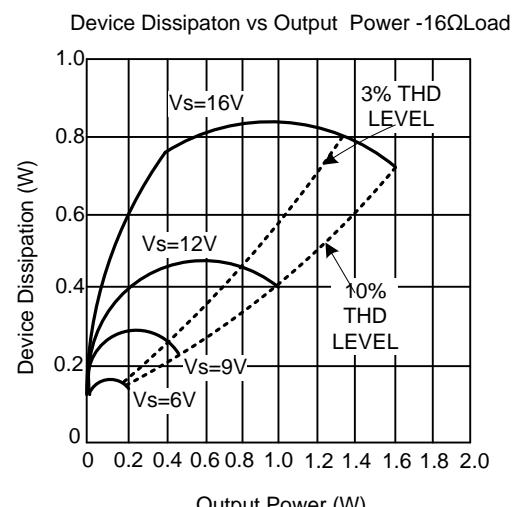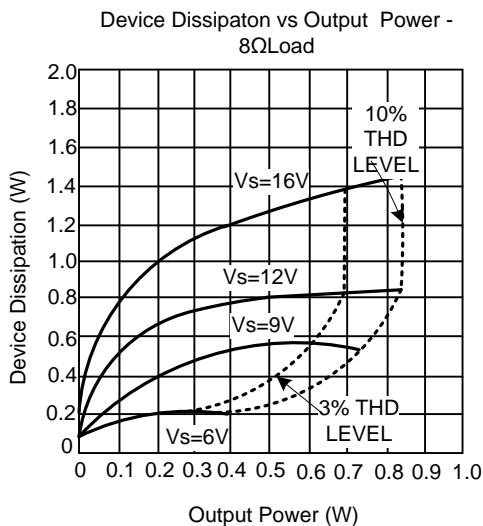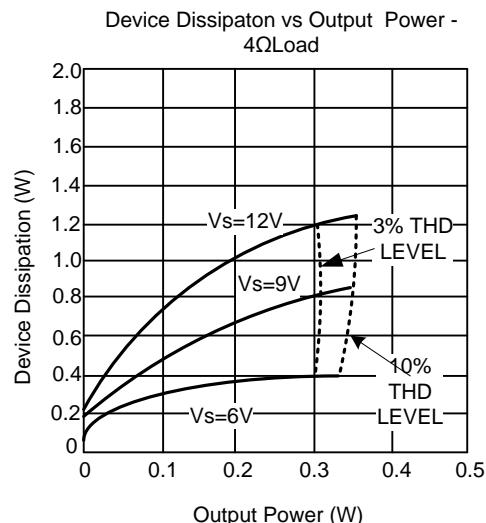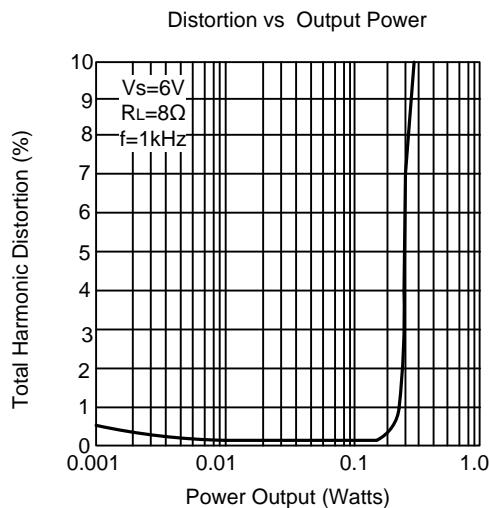

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.