OSC4467&OSA1694


NPN/PNP ComplementarySilicon Power Transistors

◆ Features:


- ✧ High efficiency,low deviation
  高效率，低偏差
- ✧ Small input impedance,low consumption of power
  输入阻抗小，功耗低
- ✧ Resistant of high temperature,high humidity
  抗高温、高湿
- ✧ Good stability,reliability
  稳定性好，可靠性高

RoHS COMPLIANT


TO-3PNT



◆ Applications

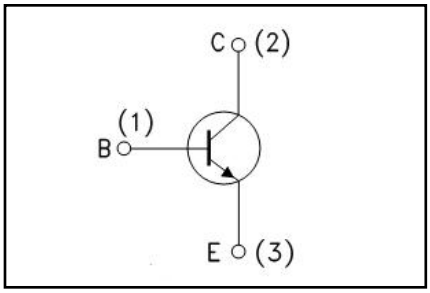

- ✧ Audio amplifier
  音频放大器
- ✧ Switching applications
  开关应用
- ✧ Complement to Type OSA1694(PNP)
  与 OSA1694(PNP)互补应用
- ✧ Recommend for 120W high fidelity audio frequency amplifier output stage applications
  推荐用于 120W 高保真音频放大器输出级应用

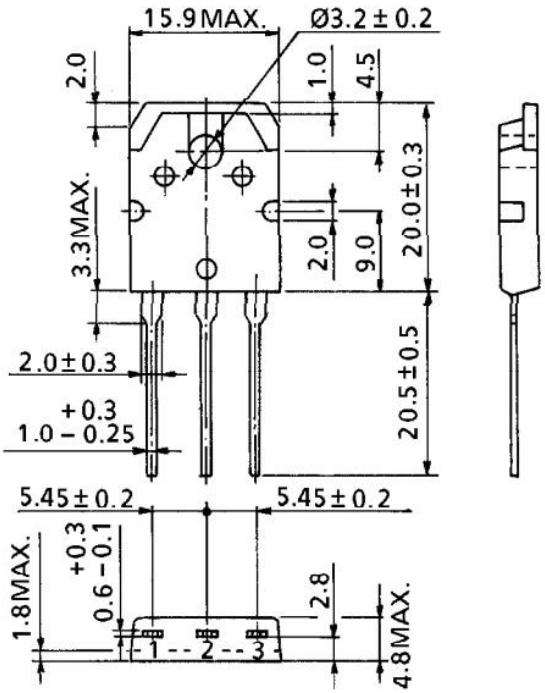

◆ Absolute Maximum Ratings (Tc=25°C)

Symbol	Parameters	Ratings	Unit
VCBO	Collector-Base Voltage 集电极 - 基极电压	**150**	V
VCEO	Collector-Emitter Voltage 集电极 - 发射极电压	**120**	V
VEBO	Emitter-Base Voltage 发射极 - 基极电压	**7**	V
I_C	Collector Current-Continuous 集电极连续电流	**11**	A
I_B	Base Current-Continuous 基极连续电流	**1**	A
PC	Collector Power Dissipation 耗散功率	**120**	W
T_j	Max.Operating junction temperature 最大结温	**150**	℃
Tstg	Storage Temperature 存储温度	**-65 ~ +150**	℃

◆ Electrical characteristics (Tc=25°C unless otherwise noted)

Symbol	Parameters	Min	Typ	Max	Units	Conditions
I_{CBO}	Collector Cutoff Current 集电极截止电流	--	--	**1.0**	μA	V_{CE}=220V，I_B=0
I_{EBO}	Emitter Cutoff Current 发射极截止电流	--	--	**1.0**	μA	V_{EB}=10V，I_C=0
BV_{CEO}	Collector Emitter Sustaining voltage(Note 1) 集电极发射极持续电压	**150**	--	--	V	I_C=50mA，I_B=0
VCE(sat)	Collector Emitter Saturation Voltage(Note 1) 集电极发射极饱和电压	--	--	**1.5**	V	I_C=8A,I_B=0.8A
h_{FE}	DC Current Gain(Note 1) 直流电流增益	**80**	--	**160**		I_C=1A，V_{CE}=5V
f_T	Current-Gain—Bandwidth 电流增益带宽	**10**	--	--	MHz	VCE=5V， Ic=1A，f=1MHz

Note 1: Pulse test: PW <= 300us , duty cycle <= 2%.

◆ DISCLAIMER

Unless otherwise specified in the datasheet, OSEN products are designed and qualified as standard commercial products and are not intended for use in applications that require extraordinary levels of quality and reliability, such as automotive, aviation/aerospace, and life-support devices or systems.

Semiconductor products are subject to an inherent possibility of failure or malfunction under certain conditions, which may result in personal injury, death, or property damage. Customers shall be solely responsible for ensuring adequate safety provisions in their system designs. And independently assume all responsibility arising from the application or use of the products or circuits described in this document

OSEN does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others. OSEN reserves the right to improve product design, function, and reliability without notice.