

Features


- High current capacity in compact package $I_C = 1.5A$.
- Epitaxial planar type
- Pb-Free package is available

Mechanical data

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, SOT-23
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Mounting Position : Any
- Weight : Approximated 0.008 gram

Maximum ratings (AT $T_A = 25^\circ C$ unless otherwise noted)

PARAMETER	Symbol	MAX.	UNIT
Collector-base voltage	V_{CBO}	40	V
Collector-emitter voltage	V_{CEO}	25	V
Emitter-base voltage	V_{EBO}	5.0	V
Collector current-continuoun	I_C	1500	mAdc

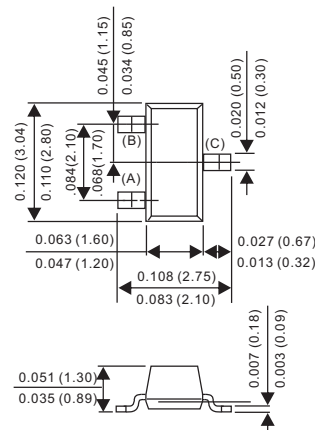

Dimensions in inches and (millimeters)

Thermal Characteristics

PARAMETER	Symbol	MIN.	TYP.	MAX.	UNIT
Total device dissipation FR-5 board (1)	P_D			225	mW
Derate above $25^\circ C$				1.8	mW/ $^\circ C$
Thermal resistance Junction to ambient	$R_{\theta JA}$			556	$^\circ C/W$
Total device dissipation alumina substrate(2)	P_D			300	mW
Derate above $25^\circ C$				2.4	mW/ $^\circ C$
Thermal resistance Junction to ambient	$R_{\theta JA}$			417	$^\circ C/W$
Operating Junction temperature Range	T_J	-55		+150	$^\circ C$
Storage temperature Range	T_{STG}	-55		+150	$^\circ C$

1.FR-5 = 1.0 X 0.75 X 0.062 in.

2.Alumina = 0.4 X 0.3 X 0.024 in. 99.5% alumina.

Electrical Characteristics (AT $T_A = 25^\circ C$ unless otherwise noted)

Off characteristics









PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Collector-base breakdown voltage	$I_C = 100\mu A$	$V_{(BR)CBO}$	40			V
Collector-emitter breakdown voltage	$I_C = 1.0mA$	$V_{(BR)CEO}$	25			V
Emitter-base breakdown voltage	$I_E = 100\mu A$	$V_{(BR)EBO}$	5.0			V
Collector cutoff current	$V_{CB} = 35V$	I_{CBO}			150	nA
Emitter cutoff current	$V_{EB} = 4.0V$	I_{EBO}			150	nA

On characteristics



PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
DC current gain	$I_C = 100mA, V_{CE} = 1.0V$	h_{FE}^{*Note}	80		400	
Collector-emitter saturation voltage	$I_C = 800mA, I_B = 80mA$	$V_{CE(sat)}$			0.5	V

Note	*	L	H	J
	h_{FE}	80~200	200~350	300~400

Rating and characteristic curves

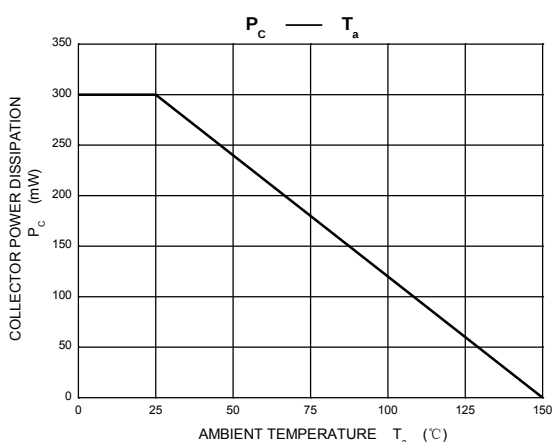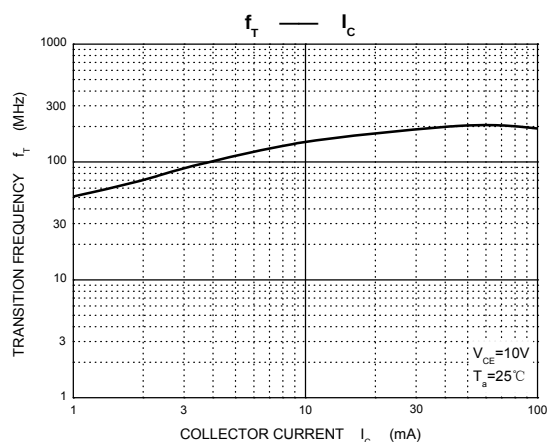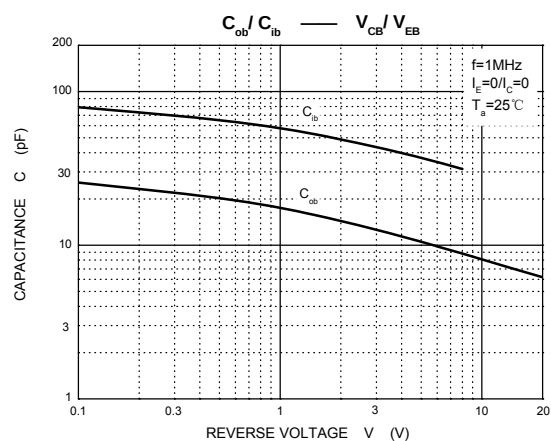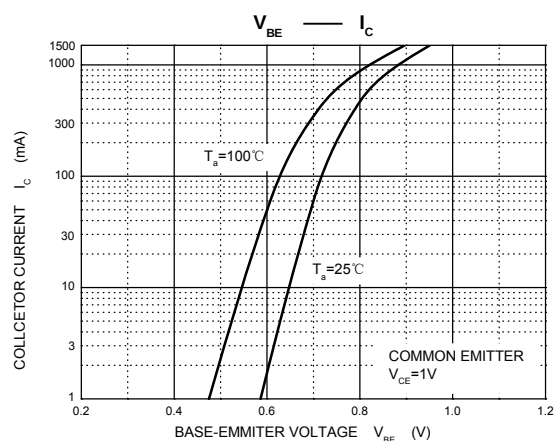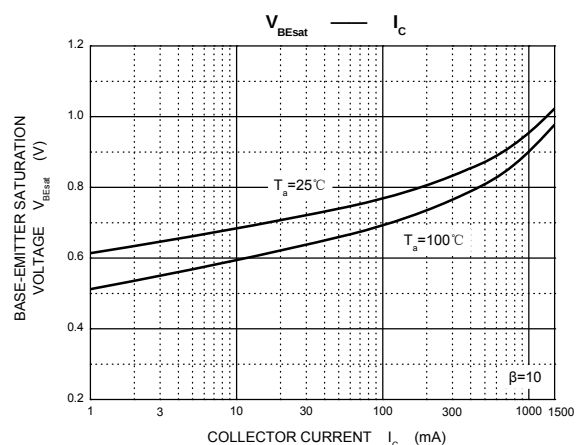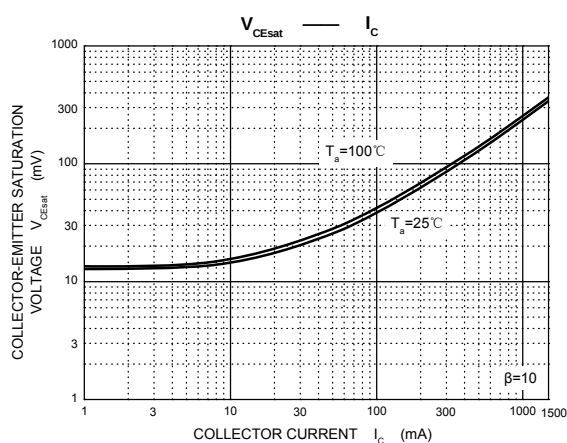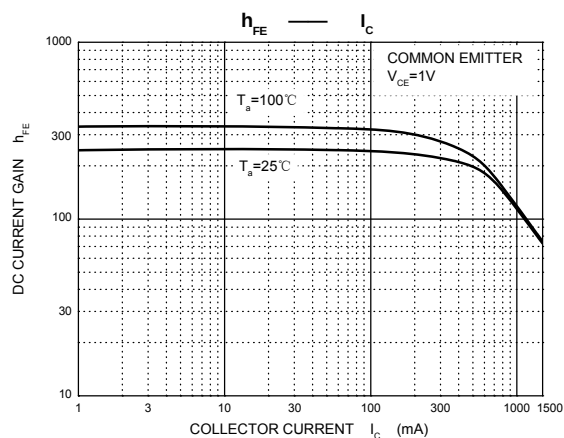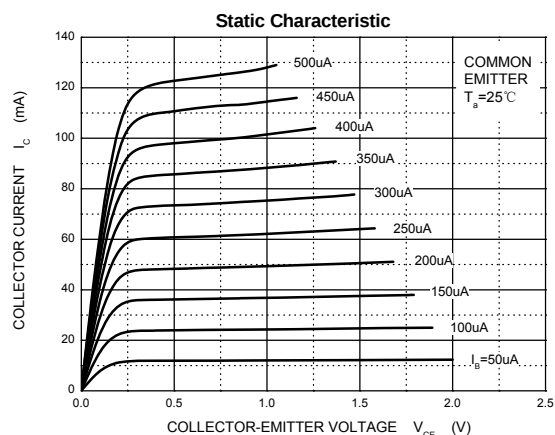


Pinning information

Pin	Simplified outline	Symbol
PinB Base PinC Collector PinE Emitter		

Marking

Type number	Marking code
SS8050	Y1

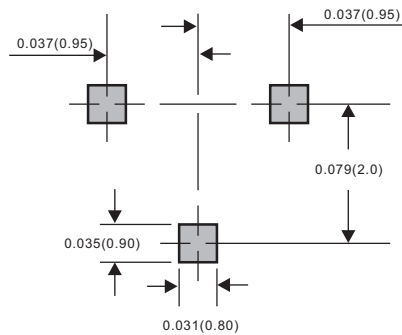Suggested solder pad layout
SOT-23


Dimensions in inches and (millimeters)