
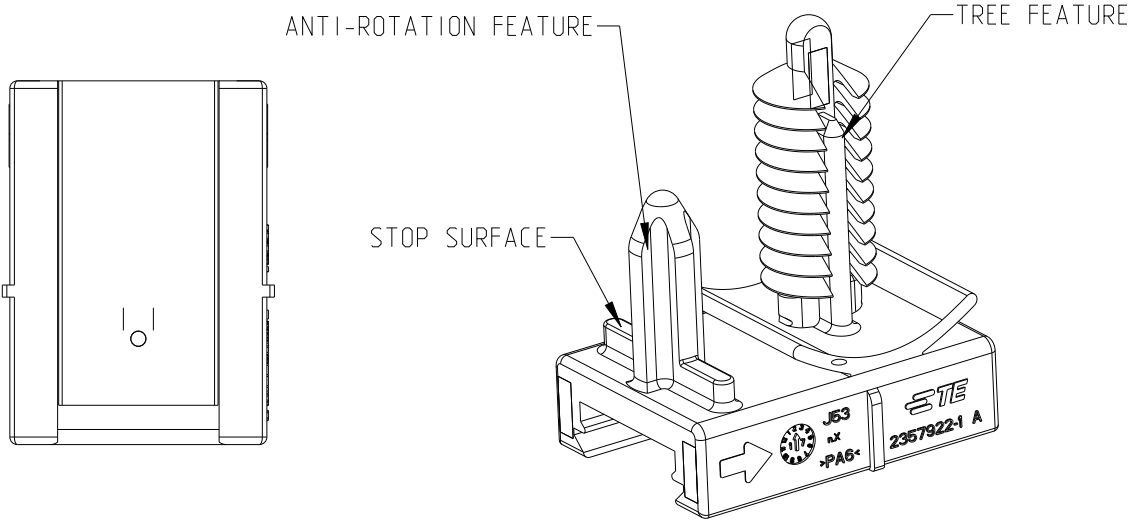


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	02UN2020	V.T	I.Y
	A1	ECR-20-018137	31DEC2020	V.T	I.Y
	A2	ECN-21-122285	15OCT2021	L.G	Z.Z

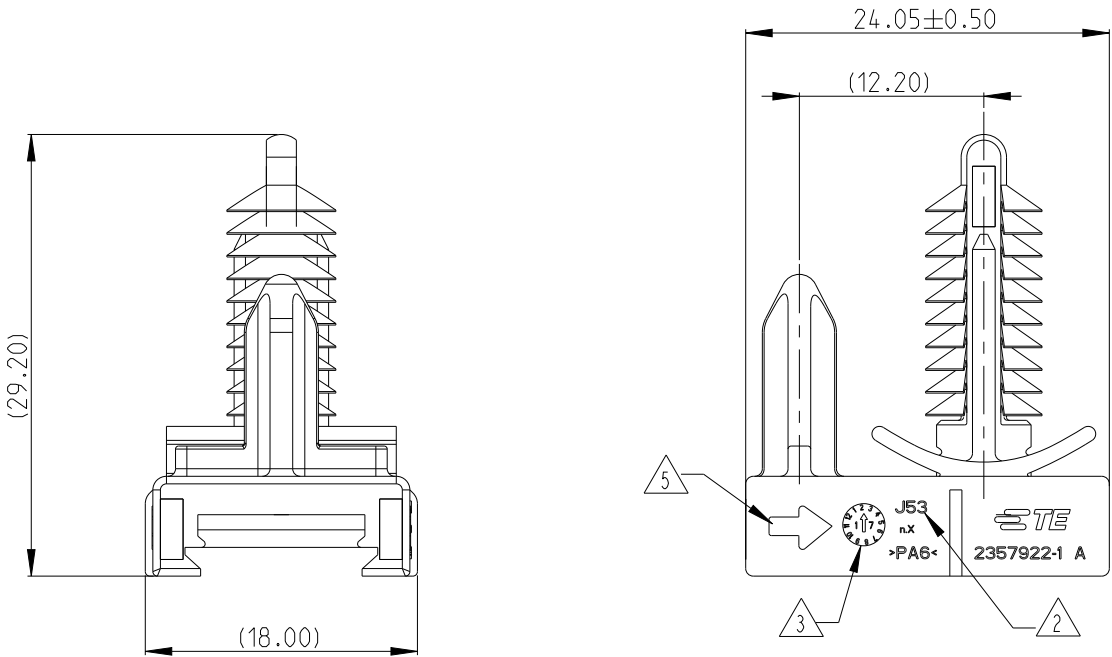

NOTES:

1.MATERIAL: PA6 COLOUR:SEE TABLE.

2.MANUFACTURING LOCATION.



3.DATE CODE.

4.APPLICABLE TO DT04-DOVETAIL INTERFACE.

5.CLIP INSERT CONNECTOR DIRECTION,MATES WITH NTS SERIES AND SUPERSEAL PRO SERIES.


RECOMMENDED MOUNTING PARAMETERS

PANEL THICKNESS	ANTI-ROTATION HOLE	TREE HOLE	CENTER DISTANCE BETWEEN TREE HOLE AND ANTI-ROTATION HOLE
3.5mm-6mm	THRU HOLE $\varnothing 5.00 \pm 0.05\text{mm}$	THREADED M8	$12.20 \pm 0.05\text{mm}$

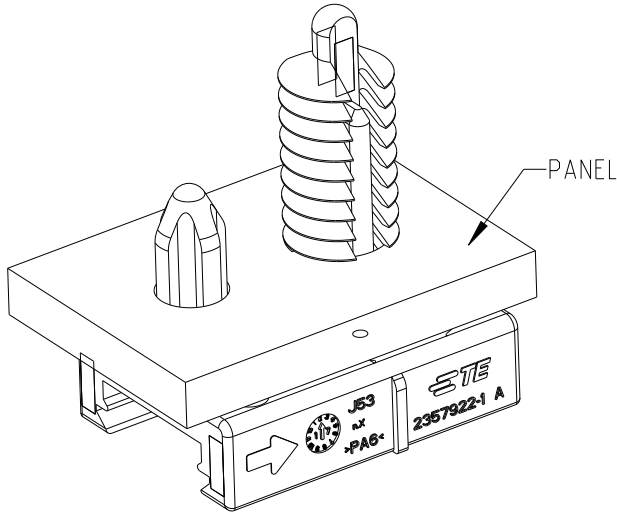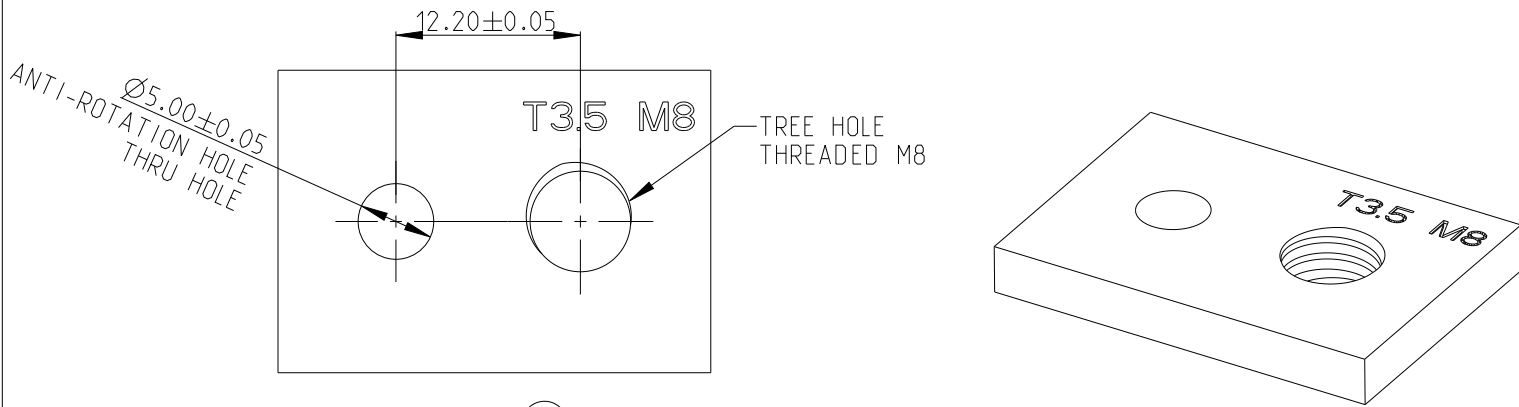

MOUNTED AS SHOWN
(INSERT CLIP UNTIL THE STOP SURFACE MEETS THE PANEL)

2357922-1	BLACK	2.48
PART NO.	COLOUR	WEIGHT(g)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN V.TANG 01JUN2020		TE Connectivity			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK E.JIANG 02JUN2020					
		APVD I.YIN 02JUN2020					
		PRODUCT SPEC 108-160014		NAME FIR CLIP NTS SERIES,SUPERSEAL PRO SERIES			
		APPLICATION SPEC -					
		WEIGHT -					
MATERIAL SEE NOTES -	FINISH - -	SIZE A3			CAGE CODE 00779	DRAWING NO C-2357922	RESTRICTED TO -
		CUSTOMER DRAWING				SCALE 2:1	SHEET 1 OF 1