
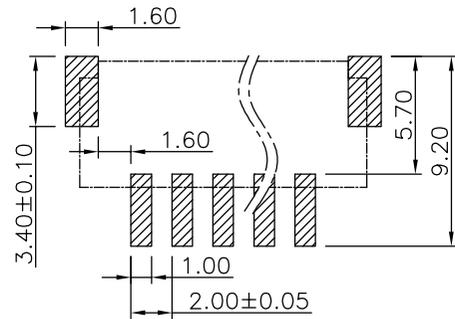


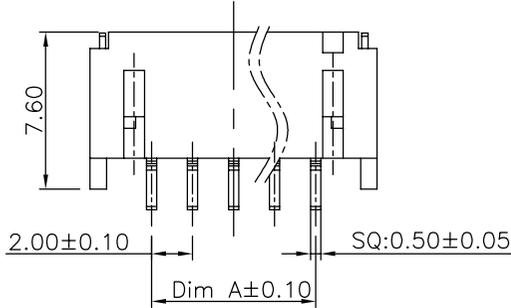
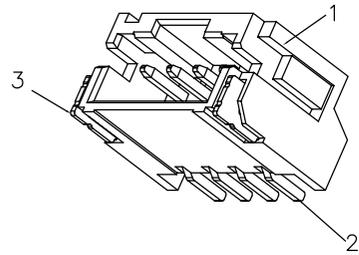


RoHS

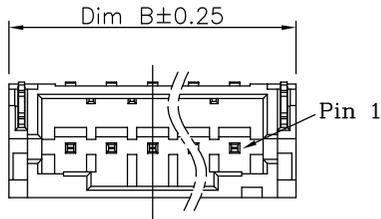

RECOMMENDED P.C.B LAYOUT

NO. COMPONENTS	MATERIALS	SPECIFICATION:FINISH/COLOR	QTY.
1 HOUSING	NYLON UL94V-0	WHITE / BLACK	1
2 CONTACT	BRASS	THE SURFACE: TIN	N/A
3 STATOR	BRASS	THE SURFACE: TIN	2

NOTE(UNLESS OTHERWISE SPECIFIED):  
 1. ALL MATERIAL MUST BE COMPLY WITH ROHS.  
 2. PRODUCT PERFORMANCE:  
 2.1 RATED VOLTAGE(MAX.):100V AC/DC  
 2.2 RATED CURRENT(MAX.):2.0A AC/DC  
 2.3 DIELECTRIC STRENGTH:800V AC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL, NO BREAKDOWN  
 2.4 INSULATION RESISTANCE:1000 MΩ MIN. 500VDC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL  
 2.5 CONTACT RESISTANCE:20 mΩ MAX.  
 2.6 OPERATING TEMPERATURE:-25°C to +85°C  
 3.PART NO. LEGEND: 1WF06-025 OXX-0000X

WATER CODE  
002:2PIN

PIN	WATER CODE	NOTES
2P	00001	NYLON BLACK
2P	00002	NYLON WHITE
3P	00001	NYLON BLACK
3P	00002	NYLON WHITE
4P	00001	NYLON BLACK
4P	00002	NYLON WHITE
5P	00001	NYLON BLACK
5P	00002	NYLON WHITE
6P	00001	NYLON BLACK
6P	00002	NYLON WHITE
7P	00001	NYLON WHITE
8P	00001	NYLON WHITE
10P	00001	NYLON WHITE
12P	00001	NYLON WHITE

Circuit No.	Dimensions	
	A	B
02P	2.00	8.00
03P	4.00	10.00
04P	6.00	12.00
05P	8.00	14.00
06P	10.00	16.00
07P	12.00	18.00
08P	14.00	20.00
09P	16.00	22.00
10P	18.00	24.00
11P	20.00	26.00
12P	22.00	28.00
13P	24.00	30.00
14P	26.00	32.00
15P	28.00	34.00
16P	30.00	36.00

5.0				
4.0	2022.10.14	Added 12PIN specifications	ShunMingWen	
3.0	2022.03.23	MODIFY PRODUCT NUMBER	ShunMingWen	
2.0	2016.08.22	All customers increased by logo "CB"	Tian Hai	
1.0	2016.08.16	NEW	Tian Hai	
NO.	DATE	DESCRIPTION	DRAWING	

DRAWING: Chen jie	GENERAL TOLERANCE .X:=±0.30 .X':=±2° .XX:=±0.25 .XX':=±1° .XXX:=±0.15 .XXX':=±0.5°	
CHECKED: Tian Hai	UNIT: MM	PROJECTION:
APPROVAL: Cykin	SCALE: 1/1	
	SHEET: 1/1	



DESCRIPTION: 2.00 mm Pitch Wafer Side Entry SMT Type	
PART NO: 1WF06-0250XX-0000X	REV: 4.0
OLD CODE: WB2008UR-XXTX-CB	SIZE: A4
DRAWING NO: UK0306	