

## ► Features


- $V_R=100V$
- $I_{F(AV)}=200mA$
- Power Dissipation of 250mW
- Fast switching speed
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C

## ► Applications

For use in low voltage high frequency circuit signals.

## ► Mechanical Data

- Case: SOD-323  
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Cathode line denotes the cathode end



## ► Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Maximum repetitive peak reverse voltage	$V_{RRM}$	V	85
Maximum RMS Voltage	$V_{RMS}$	V	75
Reverse Breakdown voltage @ $I_R=100\mu A$	$V_{(BR)R}$	V	100
Maximum Average Forward Rectified Current	$I_{F(AV)}$	mA	200
Non-Repetitive Peak forward surge current @ $t_p=1\mu s$	$I_{FSM}$	A	4.0
Non-Repetitive Peak forward surge current @ $t_p=1ms$			1.0
Non-Repetitive Peak forward surge current @ $t_p=1s$			0.5
Power Dissipation	$P_d$	mW	250
Storage temperature	$T_{stg}$	°C	-55 ~+150
Junction temperature	$T_j$	°C	-55 ~+150
Typical thermal resistance	$R_{\theta J-A}$	°C /W	450

## ► Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	TEST CONDITIONS	SYMBOL	UNIT	Min	Typ	Max
Maximum instantaneous forward voltage	$I_F=1.0mA$	$V_F$	V	—	—	0.90
	$I_F=10mA$			—	—	1.0
	$I_F=50mA$			—	—	1.1
	$I_F=150mA$			—	—	1.25
Reverse Leakage Current	$V_R=75V$	$I_R$	nA	—	—	5.0
	$V_R=75; T_j=150^\circ C$		μA	—	—	80
Total capacitance	$V_R=0V, f=1MHz$	$C_T$	pF	—	2.0	—
Maximum reverse recovery time	$I_F=I_R=10mA, I_n=0.1 \times I_R, R_L=100\Omega$	$T_{rr}$	μs	—	0.8	3.0

## ► Ratings And Characteristics Curves ( $T_a=25^\circ\text{C}$ Unless otherwise specified)

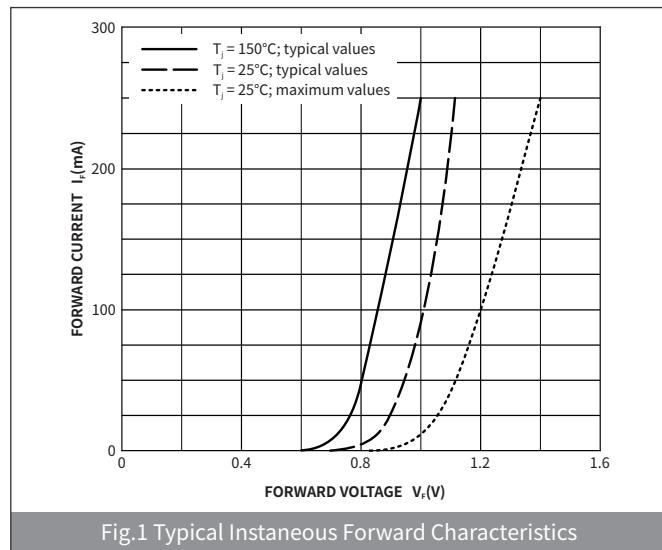


Fig.1 Typical Instantaneous Forward Characteristics

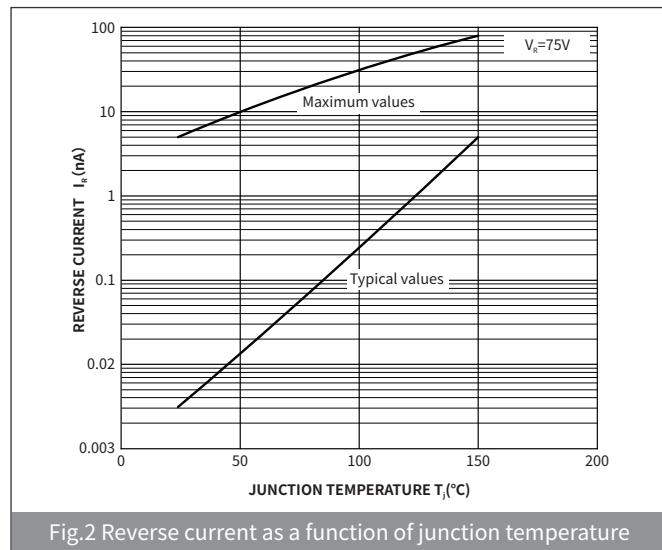


Fig.2 Reverse current as a function of junction temperature

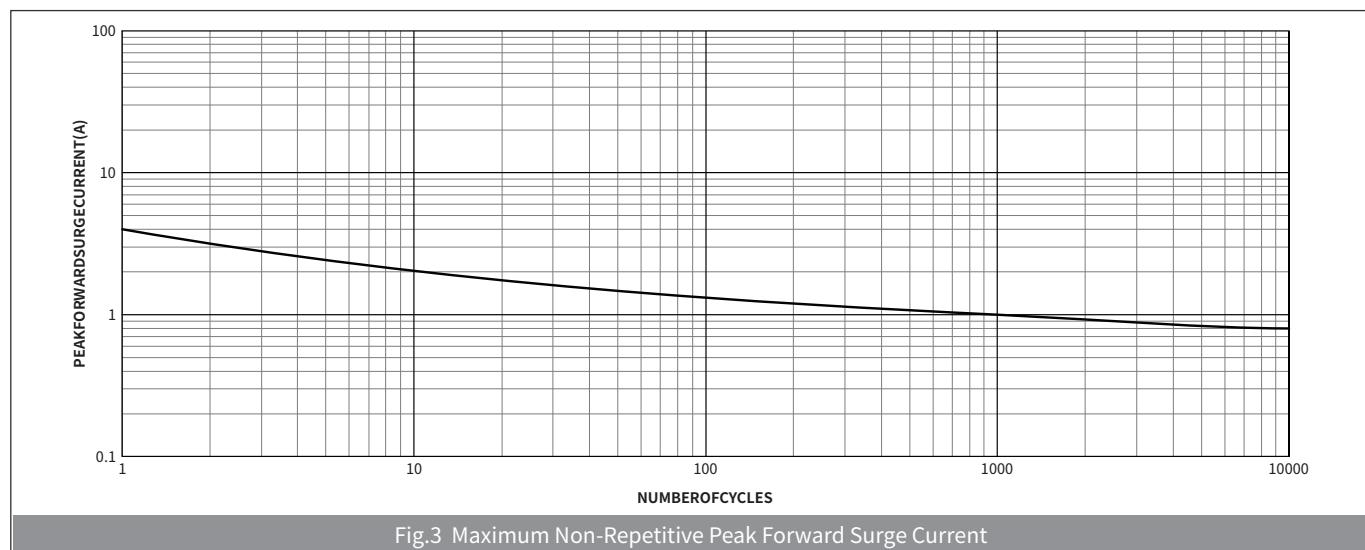


Fig.3 Maximum Non-Repetitive Peak Forward Surge Current

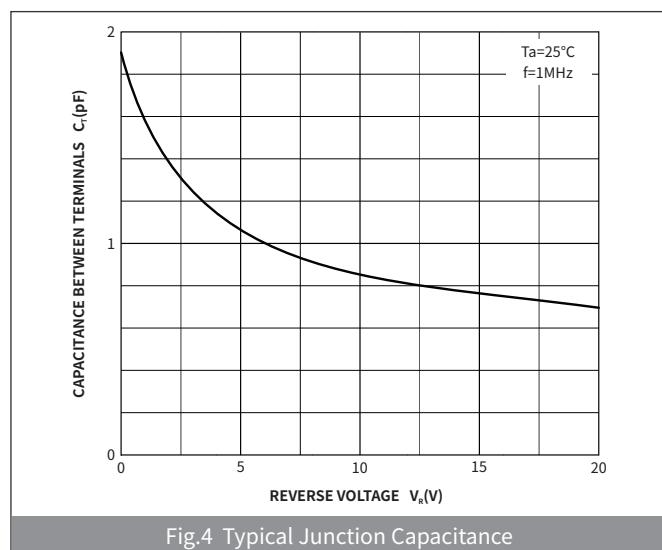


Fig.4 Typical Junction Capacitance


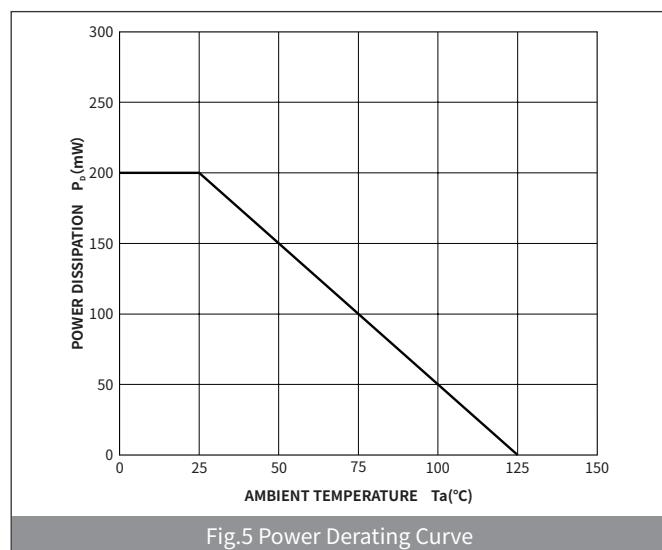


Fig.5 Power Derating Curve

## ► Ordering Information


PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOD-323	R1	0.0048	3000	30000	120000	7"

## ► Package Outline Dimensions (SOD-323)

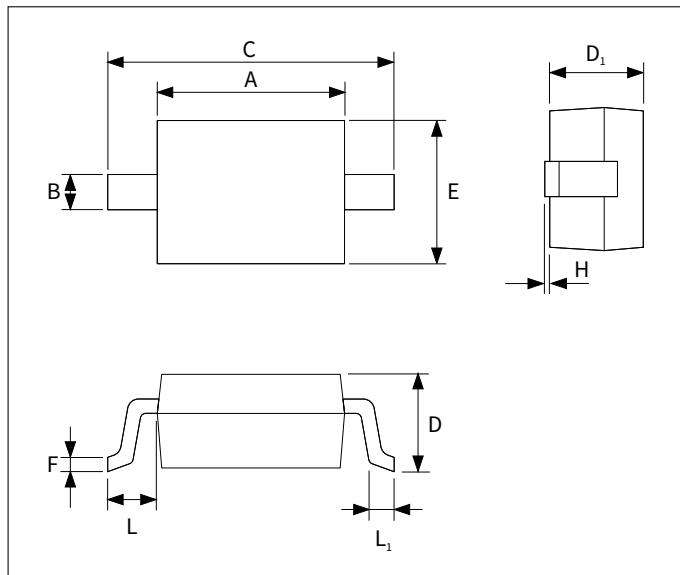

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.60	1.80	0.063	0.071
B	0.25	0.40	0.010	0.016
C	2.30	2.80	0.091	0.110
D	0.80	1.10	0.031	0.043
D <sub>1</sub>	0.80	0.90	0.031	0.035
E	1.20	1.40	0.047	0.055
F	0.08	0.18	0.003	0.007
L	0.475REF		0.019REF	
L <sub>1</sub>	0.25	0.40	0.010	0.016
H	-	0.14	-	0.006

## ► Suggested Pad Layout

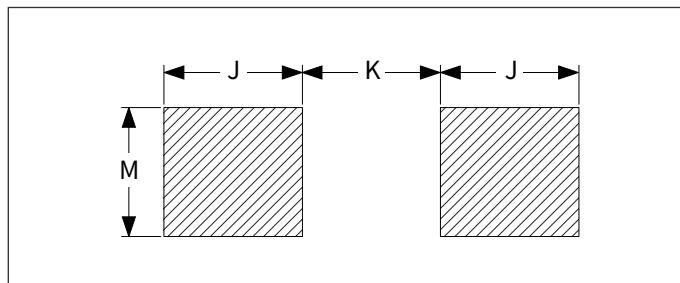

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.80	-	0.031	-
K	-	1.40	-	0.055
M	0.80	-	0.031	-