

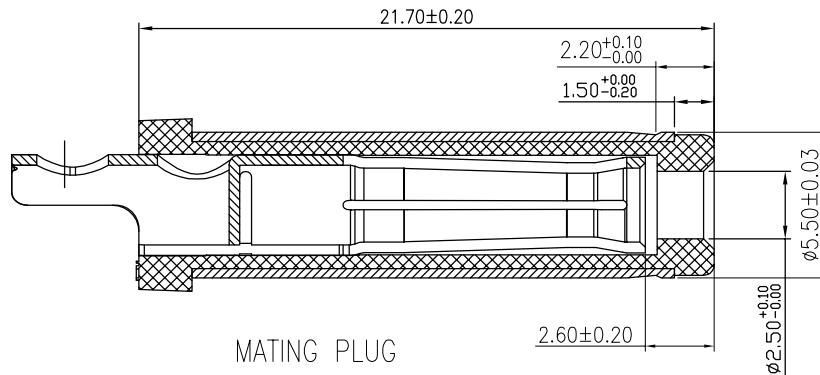
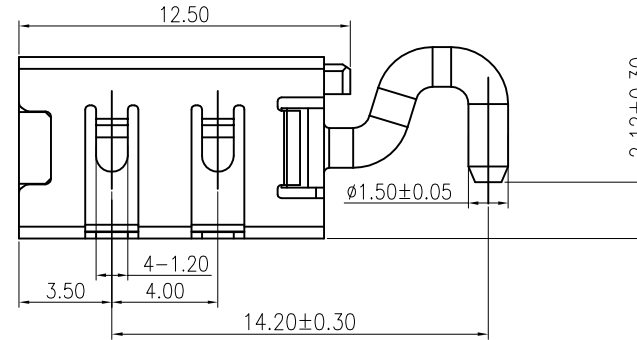
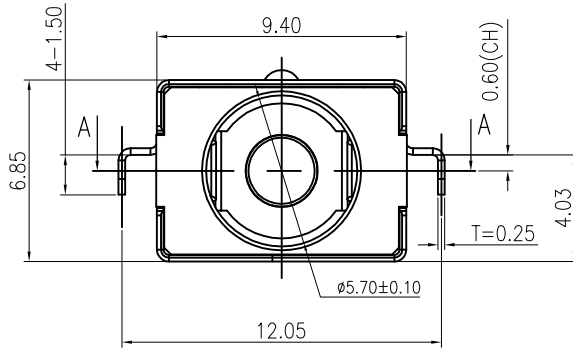
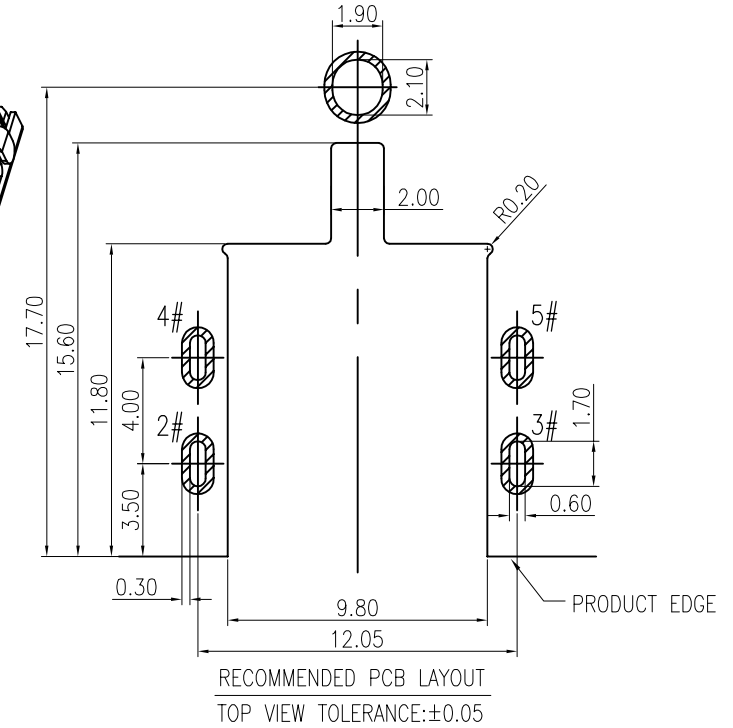
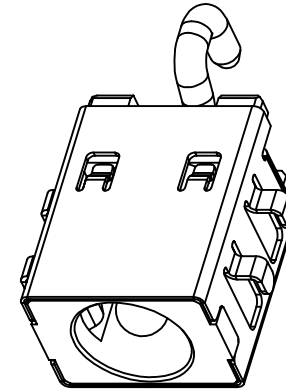
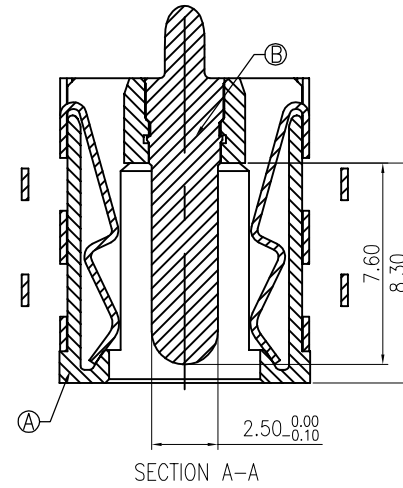


修 订	标 记	修 改 描 要	签 名	日 期
REV AO		NEW DWG		2016-03-12

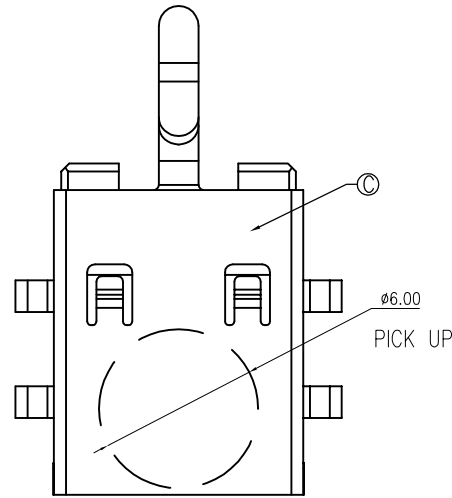

MATING PLUG
DP550250-0188-6H



SPECIFICATION:

1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:
30m Ω MAX(INITIAL).
50m Ω MAX(FINAL).
3. INSULATION RESISTANCE: 100 M Ω MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES



深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
电话: 0755-23304126 传真: 0755-29940187

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差参数表



TITLE: DC Power Jack 5521 大电流15A, 卧
产品名称: 式, 高可靠 CL=-0.6

C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

X.X	± 0.30	X.X*	$\pm 3^\circ$
X.XX	± 0.20	X.XX*	$\pm 2^\circ$
X.XXX	± 0.10	X.XXX*	$\pm 1^\circ$

APPD: 核准:	
CHECK: 校对:	王建业
DRAW: 绘图:	黄艳兰

PART NO:
产品编号:

DC550250-1151-2H

DATE	SCALE	UNIT	CODE NUMBER
2016-03-12	1:1	mm	A001