

1

2

3

4

5

6

7

8





A

B

由 Autodesk 教育版产品制作

D

E

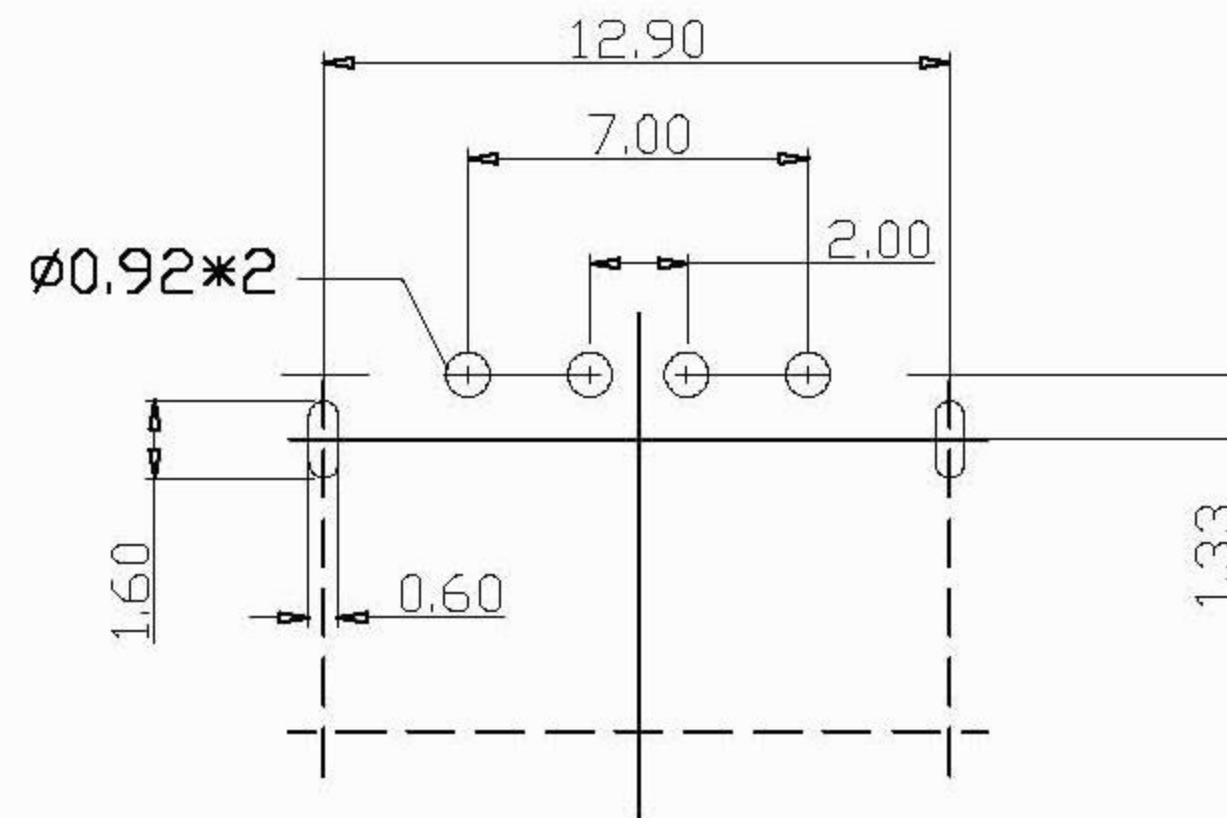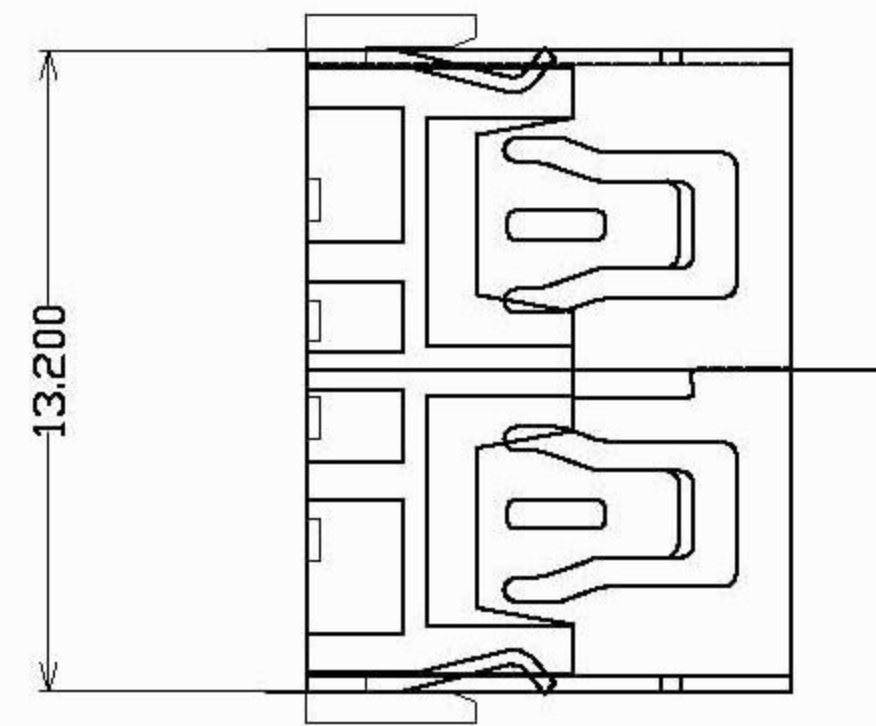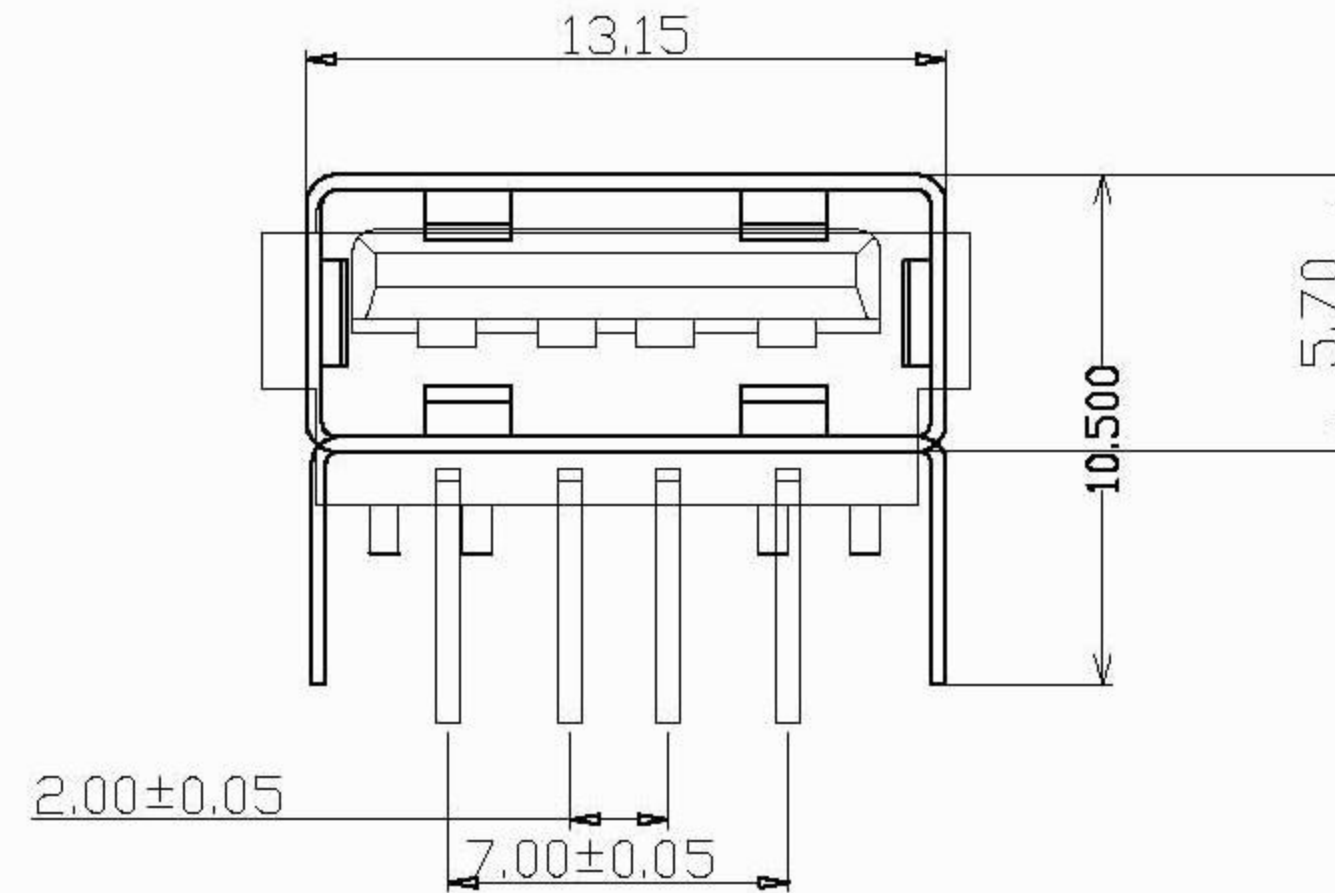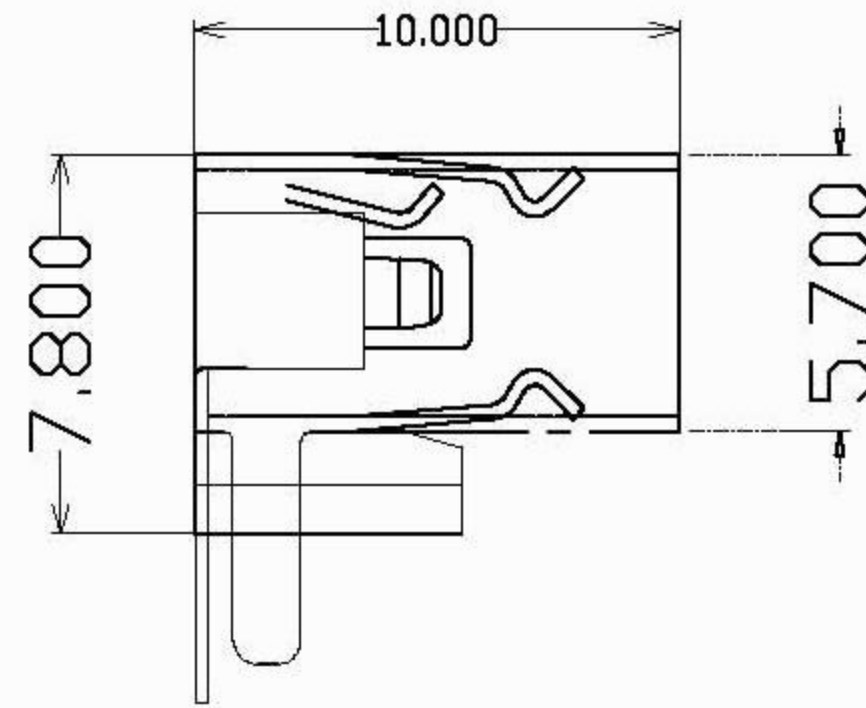

RECOMMENDED P.C.B LAYOUT

NOTES:

1. MATERIAL SPECIFICATION

1) INSULATION MATERIAL THERMOPLASTIC:PBT/LCP

2) SHELL:COPPER ALLOY/SPCC, T:0.30mm

PLATING: NICKEL

3) TERMINAL:COPPER ALLOY, T:0.25mm

PLATING: GOLD/TIN PLATED.

2. ELECTRICAL CHARACTERISTIC:

1) INSULATION RESISTANCE:1000MΩ MIN.

2) CONTACT RESISTANCE:30mΩ MAX.

3) WITHSTANDING VOLTAGE:500V AC.

3. MECHANICAL CHARACTERISTICS:

1) INSERTION FORCE:3.57Kgf MAX.

2) EXTRACTION FORCE:1.02Kgf MIN.

ORDERING INFORMATION

深圳市连欣科技有限公司

TEL: 0755-33978030 FAX: 0755-32937438

MATERIAL:

UNIT:

M/M

SURFACES:

SCALE:


1:1

COLOR:

REV:

A

THIRD ANGLE



DRAWING BY

SU

Brand/Model:

10.0加高7.8后两脚无边DIP

CHECK BY

QING

PART NAME:

Assembly

APPROVED

LEE

DRAWING NO.

XUBF-0241-0780

DATE:

2011.09.09

USER'S OR TOOLING NO.

XL001-1B-1

TOLERANCE

	X	XX	XXX	XXX	°
A	± 0.20	± 0.10	± 0.05	± 0.03	± 1°
B	± 0.50	± 0.20	± 0.10	± 0.05	± 2°
C	± 0.20	± 0.10	± 0.05	± 0.03	± 2°

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作