



MURS205~MURS260

2.0Amp Super Fast Recovery Rectifiers

Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated junction chip
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed
250°C/10 seconds at terminals

Mechanical Data


Case : Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750,Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

DO-214AA/SMB

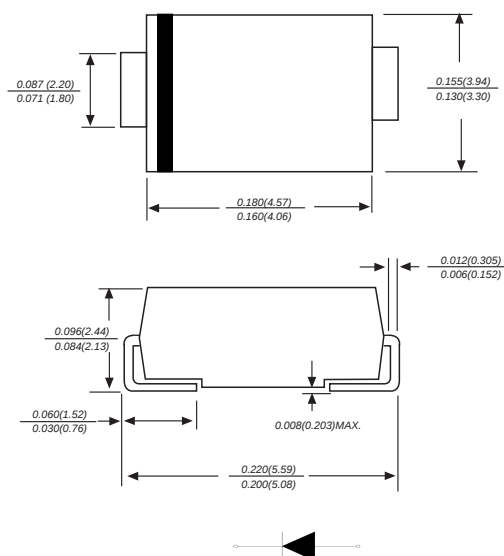

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MURS 205	MURS 210	MURS 220	MURS 240	MURS 250	MURS 260	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	500	600	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	350	420	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	500	600	V
Maximum average forward rectified current at T _C =110°C	I _(AV)	2.0						A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	50						A
Maximum instantaneous forward voltage per diode at 2.0A	V _F	1.0			1.25	1.55		V
Maximum DC reverse current at rated DC blocking voltage	T _A =25°C I _R T _A =125°C	5.0 200						u A
Maximum reverse recovery time	T _{rr}	35			50			ns
Typical thermal resistance	R _{qJA}	75.0						°C/W
Operating junction temperature range	T _J	-55 to +150						°C
Storage temperature range	T _{STG}	-55 to +150						°C

Note:1.Reverse recovery time test condition: $I_F=0.5\text{A}$ $I_R=1.0\text{A}$ $I_{rr}=0.25\text{A}$

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

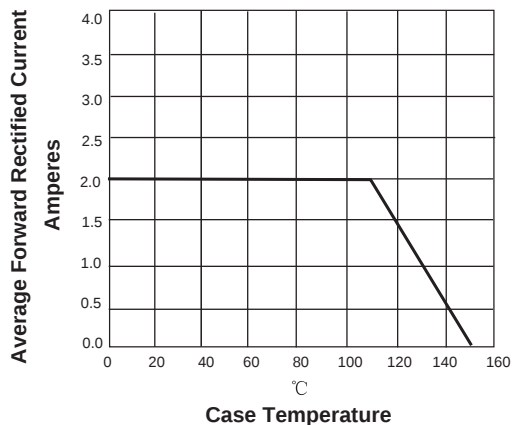


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

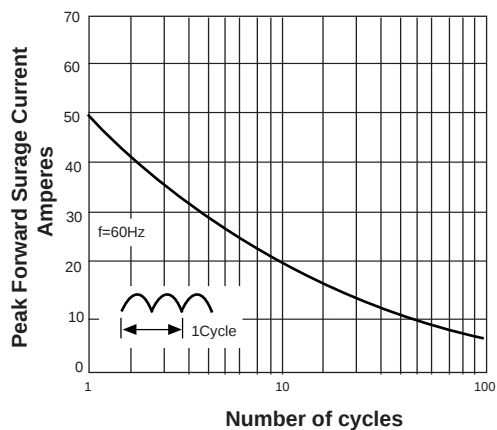


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

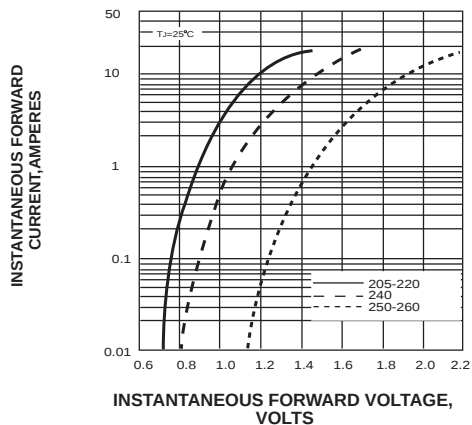


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

