


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	DRAWING REPLACES CIB24BFR-LDD1	6/27/14	D.FRISIELLO

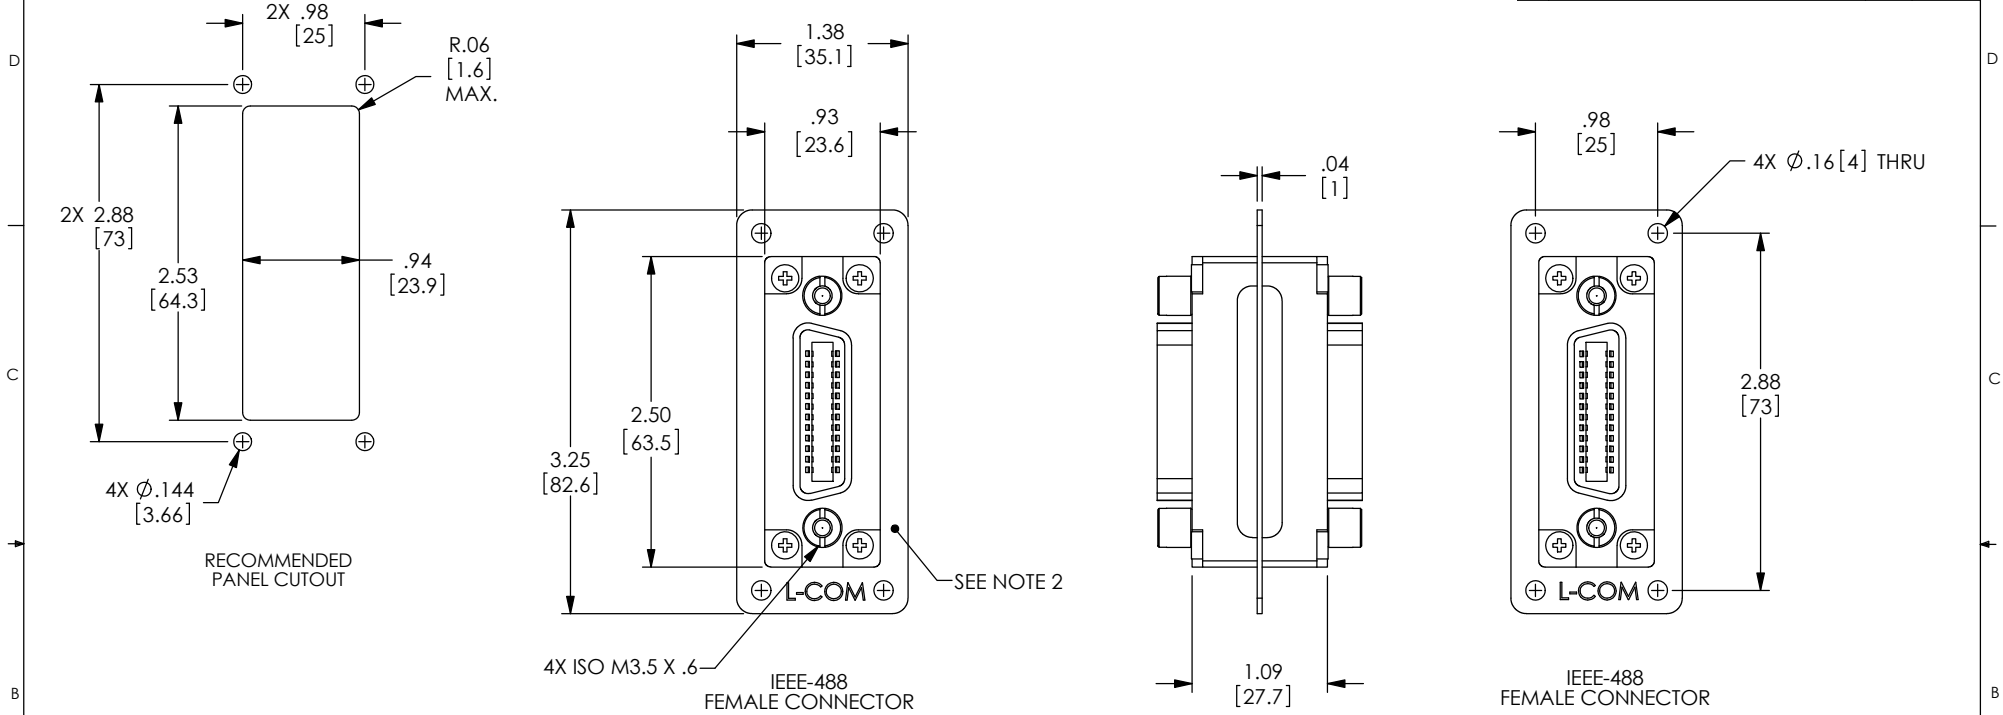

- NOTES:
1. MATERIAL: HOUSING; CAST ALUMINUM. INSULATOR; GLASS FILLED PBT (BLUE) U.L. 94V-0 FLAMMABILITY RATING.
 2. MOUNTING FLANGE: FIBER GLASS FILLED THERMOSETTING RESIN.
 3. FINISH: HOUSING; NICKEL PLATED. CONTACTS; 15 MICRO INCHES GOLD PLATE.
 4. WIRING: STRAIGHT THRU.
 5. TWO DUST CAPS PROVIDED WITH ADAPTER.
 6. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
 7. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)		APPROVALS		DATE	
DRAWN BY: R. CARWICK		CHECKED BY: DOUG PARHAM		8/17/2001	
OVERALL CABLE LENGTH TOLERANCE:		APPROVED BY: C. MCCORMICK		8/27/2001	
≤12 [305] ±.01 [25] / -0		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		COLOR VARIATIONS MAY OCCUR	
>12 [305] ±.01 [25] / -0		PROJECTION		SCALE: 1:1	
>40 [1024] ±.02 [508] / -0		CIB24BFR-LDD1		SHEET 1 OF 1	
>120 [3048] ±.03 [762] / -0		CIB24BFR-LDD1		SHEET 1 OF 1	
>300 [7620] ±.05 [127] / -0		CIB24BFR-LDD1		SHEET 1 OF 1	
ALL OTHER DIMENSIONAL TOLERANCES:		CIB24BFR-LDD1		SHEET 1 OF 1	
X = ±.01 [254]		CIB24BFR-LDD1		SHEET 1 OF 1	
XXX = ±.005 [127]		CIB24BFR-LDD1		SHEET 1 OF 1	

L-com Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845

CATEGORY: IEEE-488			
PRODUCT DESCRIPTION: ADAPTOR, GPIB BULKHEAD, INSL R			
SIZE: B	PSCM NO.: 43321	DWG. NO.: CIB24BFR-I	REV.: A
SCALE: 1:1 CAD FILE: CIB24BFR-LDD1.DWG SHEET 1 OF 1			