

# NBC-M12MSD/ 0,5-93F/M12MSD - Network cable



1192155

<https://www.phoenixcontact.com/us/products/1192155>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Network cable, Ethernet CAT5e (100 Mbps), 4-position, shielded, Plug straight M12, coding: D / IP65, on Plug straight M12, coding: D / IP65, cable length: 0.5 m

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 1192155                        |
| Packing unit                         | 1 pc                           |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | BF15                           |
| Product key                          | BF1IHC                         |
| GTIN                                 | 4063151250461                  |
| Weight per piece (including packing) | 22.22 g                        |
| Weight per piece (excluding packing) | 22.22 g                        |
| Customs tariff number                | 85444290                       |
| Country of origin                    | US                             |

## Technical data

### Product properties

|                     |                         |
|---------------------|-------------------------|
| Product type        | Data cable preassembled |
| Sensor type         | Ethernet                |
| Number of positions | 4                       |
| Application         | Standard, U.S. cables   |
| Shielded            | yes                     |
| Coding              | D                       |

### Interfaces

|                      |                          |
|----------------------|--------------------------|
| Bus system           | Ethernet                 |
| Signal type/category | Ethernet CAT5e, 100 Mbps |

### Signaling

|                        |    |
|------------------------|----|
| Status display         | No |
| Status display present | No |

### Electrical properties

|                       |                                                                                              |
|-----------------------|----------------------------------------------------------------------------------------------|
| Nominal voltage $U_N$ | 48 V AC                                                                                      |
|                       | 60 V DC                                                                                      |
| Nominal current $I_N$ | 4 A (Plug/socket in accordance with IEC 61076-2-101, cable technical data is to be observed) |
| Transmission medium   | Copper                                                                                       |

### Material specifications

|                               |                                             |
|-------------------------------|---------------------------------------------|
| Material of grip body         | TPU, hardly inflammable, self-extinguishing |
| Contact material              | CuSn                                        |
| Contact surface material      | Ni/Au                                       |
| Contact carrier material      | TPU GF                                      |
| Material for screw connection | Zinc die-cast, nickel-plated                |

### Connector

#### Connection 1

|                      |                                                    |
|----------------------|----------------------------------------------------|
| Type                 | Plug straight M12 / IP65                           |
| Coding type          | D (Data)                                           |
| Material             | CuSn (Contact)                                     |
|                      | Ni/Au (Contact surface)                            |
|                      | PA (Contact carriers)                              |
|                      | TPU, hardly inflammable, self-extinguishing (Grip) |
|                      | Zinc die-cast, nickel-plated (Screw connection)    |
|                      | FKM (Seal)                                         |
| Degree of protection | IP65                                               |

# NBC-M12MSD/ 0,5-93F/M12MSD - Network cable



1192155

<https://www.phoenixcontact.com/us/products/1192155>


## Connection 2

|                      |                                                    |
|----------------------|----------------------------------------------------|
| Type                 | Plug straight M12 / IP65                           |
| Coding type          | D (Data)                                           |
| Material             | CuSn (Contact)                                     |
|                      | Ni/Au (Contact surface)                            |
|                      | PA (Contact carriers)                              |
|                      | TPU, hardly inflammable, self-extinguishing (Grip) |
|                      | Zinc die-cast, nickel-plated (Screw connection)    |
|                      | FKM (Seal)                                         |
| Degree of protection | IP65                                               |

## Cable/line

|              |       |
|--------------|-------|
| Cable length | 0.5 m |
|--------------|-------|

## Highly flexible Ethernet CAT5e [93F]

|                                 |                                                                                      |
|---------------------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing             |  |
| UL AWM Style                    | 2463 (80 °C / 600 V)                                                                 |
| Number of positions             | 4                                                                                    |
| Shielded                        | yes                                                                                  |
| Cable type                      | Highly flexible Ethernet CAT5e [93F]                                                 |
| Conductor structure             | 2x2xAWG24/7, SF/UTP                                                                  |
| Conductor structure signal line | 7x 0.20 mm (7x32)                                                                    |
| AWG signal line                 | 24                                                                                   |
| Conductor cross section         | 2x 2x 0.2 mm <sup>2</sup>                                                            |
| Wire diameter incl. insulation  | 1.2 mm                                                                               |
| External cable diameter         | 6.7 mm ±0.25 mm                                                                      |
| Outer sheath, material          | TPE                                                                                  |
| External sheath, color          | Teal                                                                                 |
| Conductor material              | Tin-plated Cu litz wires                                                             |
| Material wire insulation        | PE                                                                                   |
| Single wire, color              | white/orange-orange, white/green-green                                               |
| Twisted pairs                   | 2 cores to the pair                                                                  |
| Overall twist                   | 2 pairs to the core                                                                  |
| Optical shield covering         | 75 %                                                                                 |
| Wave impedance                  | 100 Ω ±15 Ω (at 100 MHz)                                                             |
| Cable impedance                 | 100 Ω ±15 Ω (at 1 ... 100 MHz)                                                       |
| Nominal voltage, cable          | 600 V                                                                                |

# NBC-M12MSD/ 0,5-93F/M12MSD - Network cable



1192155

<https://www.phoenixcontact.com/us/products/1192155>

|                                       |                                                           |
|---------------------------------------|-----------------------------------------------------------|
| Test voltage                          | 2000 V                                                    |
| Max. bending cycles                   | 1000000                                                   |
|                                       | 20000000 (126 cycles/min. @ 20°C)                         |
| Torsion force                         | 360 °/m (1 lb. load)                                      |
| Torsion cycles                        | 3000000                                                   |
| Torsional frequency                   | 71 (cycles/min)                                           |
| Ambient temperature (operation)       | 20 °C                                                     |
| Near end crosstalk attenuation (NEXT) | 50 dB (with 100 MHz (IEC 62153-4-9))                      |
| Return loss (RL)                      | 20 dB (at 10 MHz (+6LOG))                                 |
|                                       | 26 dB (at 20 MHz)                                         |
|                                       | 26 dB (at 100 MHz (-5LOG))                                |
| Flame resistance                      | VW-1                                                      |
| Other resistance                      | Resistant to welding splashes Abrasion and oil resistance |
|                                       | UV resistant CMX outdoor                                  |
| Ambient temperature (operation)       | -40 °C ... 80 °C (Cable, flexible installation)           |

## Environmental and real-life conditions

### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Degree of protection            | IP65                             |
|                                 | IP65                             |
| Ambient temperature (operation) | -25 °C ... 85 °C (M12 connector) |

## Standards and regulations

### M12

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M12 connector   |
| Standards/specifications | IEC 61076-2-101 |


## Drawings

Dimensional drawing



Plug, M12 x 1, straight, shielded

Circuit diagram

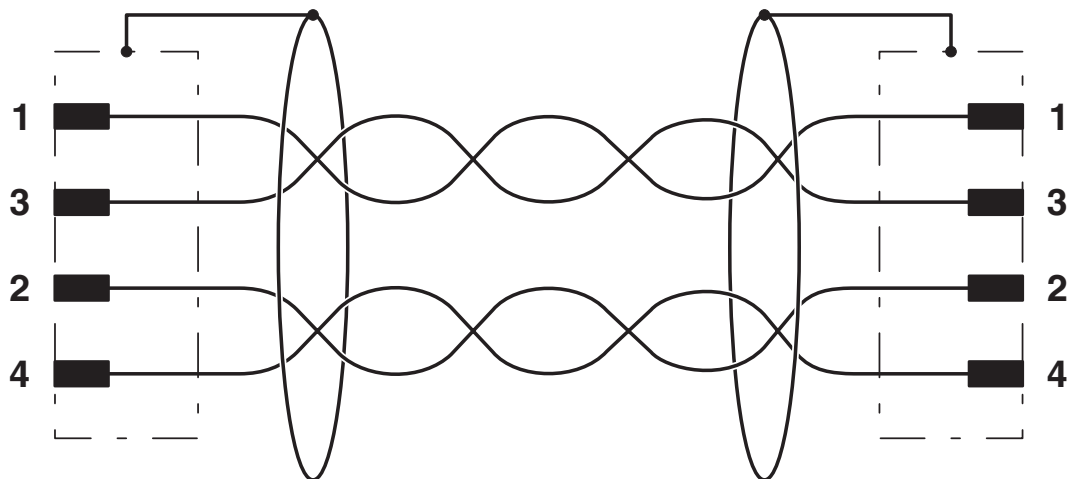

1192155

<https://www.phoenixcontact.com/us/products/1192155>

Schematic diagram



Pin assignment M12 male connector, 4-pos., D-coded, male side

# NBC-M12MSD/ 0,5-93F/M12MSD - Network cable



1192155

<https://www.phoenixcontact.com/us/products/1192155>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1192155>



### UL Listed

Approval ID: FILE E 335024

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 60 V                  | 1.5 A                 | -                 | -                           |



### cUL Listed

Approval ID: File E335024

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 60 V                  | 1.5 A                 | -                 | -                           |

### cULus Listed

# NBC-M12MSD/ 0,5-93F/M12MSD - Network cable



1192155

<https://www.phoenixcontact.com/us/products/1192155>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27060307 |
| ECLASS-12.0 | 27060307 |
| ECLASS-13.0 | 27060307 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC001855 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)