

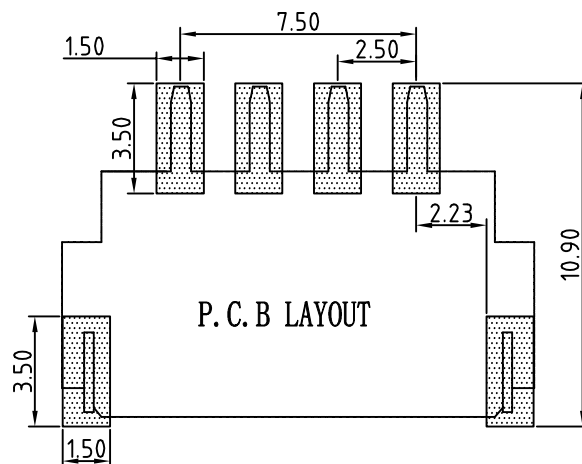
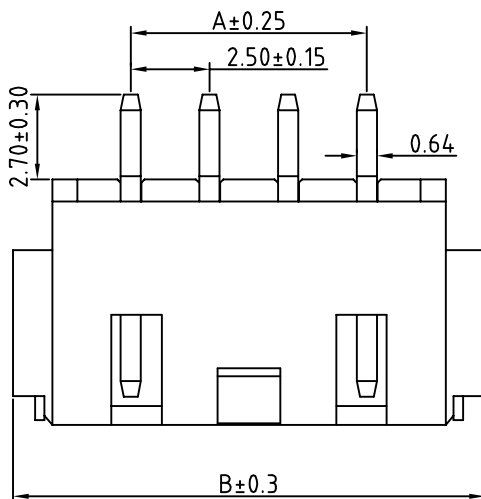
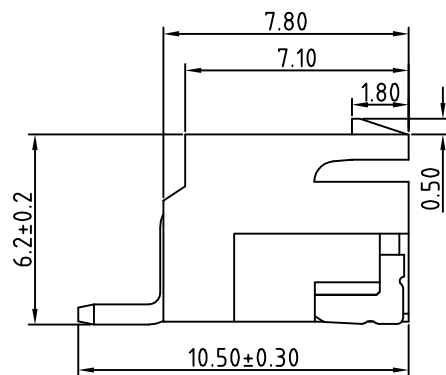


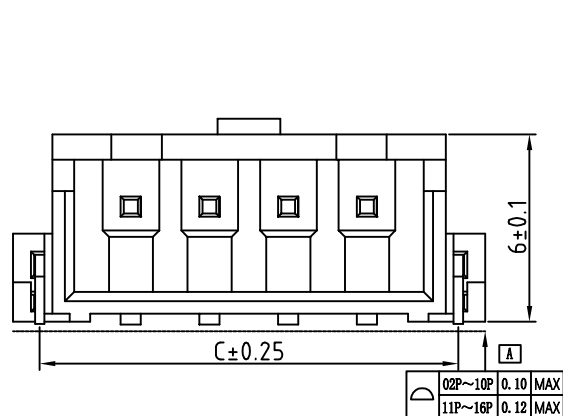

Pin	A	B	C
2	2.50	10.00	8.30
3	5.00	12.50	10.80
4	7.50	15.00	13.30
5	10.00	17.50	15.80
6	12.50	20.00	18.30
7	15.00	22.50	20.80
8	17.50	25.00	23.30
9	20.00	27.50	25.80
10	22.50	30.00	28.30
11	25.00	32.50	30.80
12	27.50	35.00	33.30
13	30.00	37.50	35.80
14	32.50	40.00	38.30
15	35.00	42.50	40.80
16	37.50	45.00	43.30

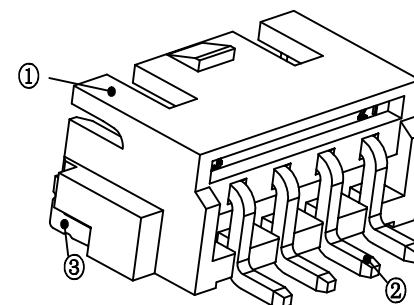

技术参数
间距:
温度范围: °C
额定电压:
额定电流:
接触电阻: Ω
绝缘电阻: Ω
耐压:

线性公差 / General Tolerance
X ±0.2
X.X ±0.1
X.XX ±0.05
角度公差 / Angle Tolerance
X° ±5.0°
X.X° ±3.0°
X.XX° ±1.0°

视角 / Projection



A1	调整平面度				
标记	变更内容			签名	年月日
绘图	Zhou qi				
审核	Zhou qi				
工艺			批准	Zhou qi	

材料 / Material

- ①塑座: 本色
②接触针: 黄铜(镀锡)
③焊片: 黄铜(镀锡)

单位 () 版本 比例

mm 2.0 1:1

共 1 张 第 1 张

B Bossie (博锡)

品名 / ProduceName

HA2.54 卧贴 3P

型号 / Model

BX-HA2.54-3PWT