


| TOLERANCE UNLESS OTHERWISE SPECIFIED | | | | |
|--|--------|-------|--|---------|
| .X | ±0.30 | .X° | | ±3.00° |
| .XX | ±0.25 | .XX° | | ±1.00° |
| .XXX | ±0.150 | .XXX° | | ±0.500° |



THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER
ORIGINAL ①

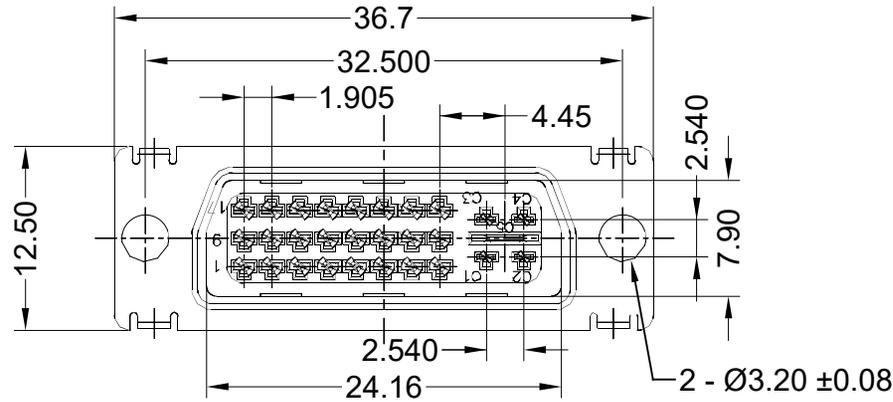

NOTE
MATERIAL
 INSULATOR: SEE TABLE
 CONTACTS: BRASS
 SHELL: SPCD
 CONTACT PLATING: GOLD-FLASH PLATING OVER NICKEL
ELECTRICAL SPECIFICATION
 CURRENT RATING: 1.5A
 VOLTAGE RATING: 40V
 CONTACT RESISTANCE: 30mΩ MAX
 INSULATION RESISTANCE: 1000MΩ MIN 500V DC
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
ENVIRONMENTAL
 OPERATING TEMPERATURE: -20°C TO +80°C

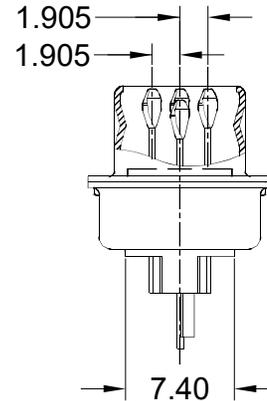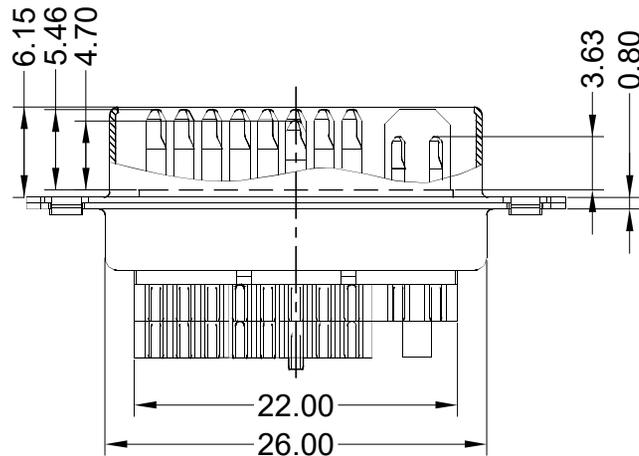

| PART NO. | MATERIAL |
|-----------------|-------------------|
| B11-029-222-111 | PBT + 30%GF BLACK |
| B11-029-222-211 | PBT + 30%GF WHITE |



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.



YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC
TORONTO, ONTARIO
CANADA

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

DVI MALE, 29 PINS, SOLDER-CUP

ACAD REFERENCE NO.: B11-029-222-111

DRAWN: P.M. DATE: AUG. 11/2020

CHECKED: R.S.M. DATE: AUG. 11/2020

SCALE: N.T.S. SHEET 1 OF 1

DRAWING NUMBER: B11-029-222-111 ISSUE 1

PART NUMBER: SEE TABLE