

Oct.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.





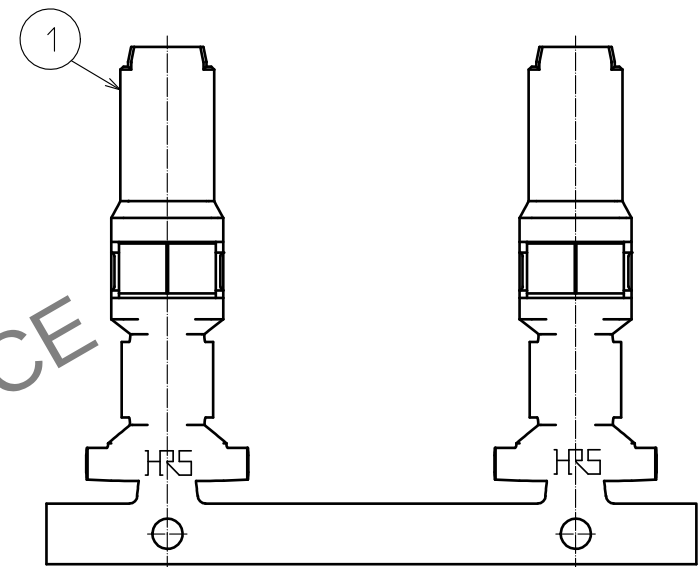


Figure with crimp contact in crimp socket


2 Style and Dimension of Reel

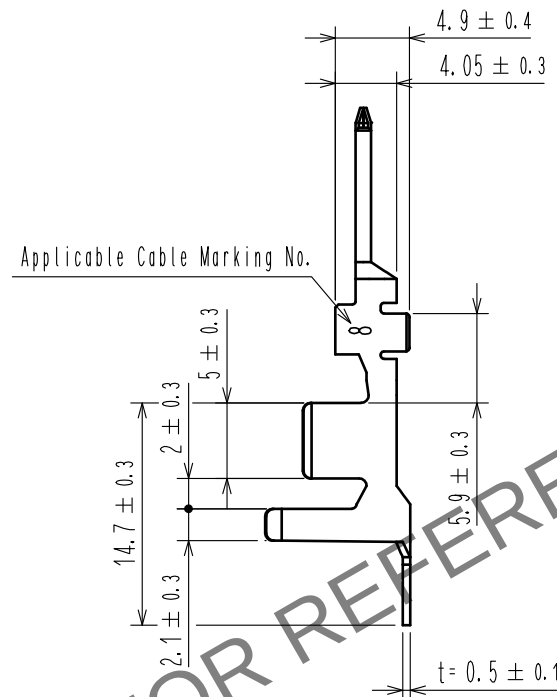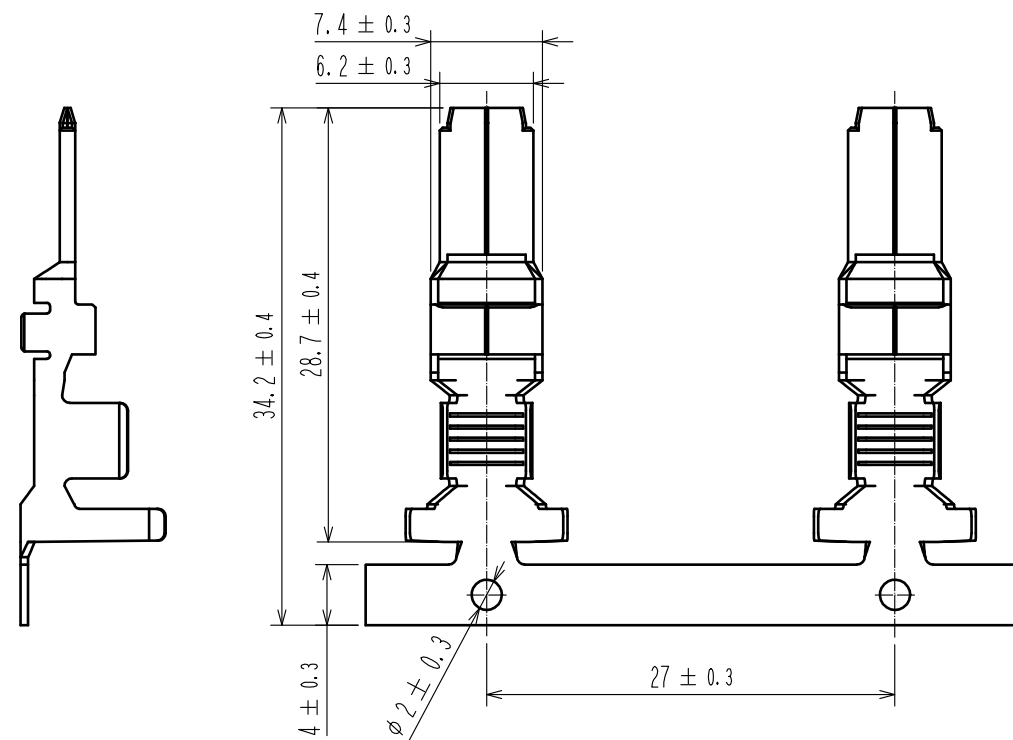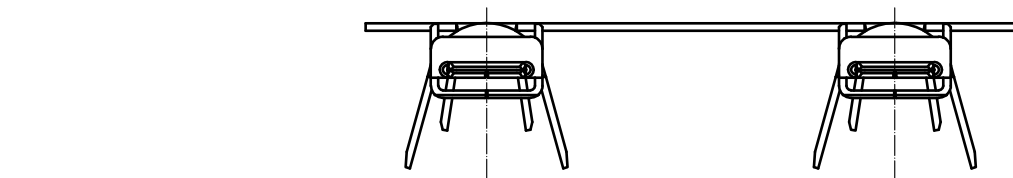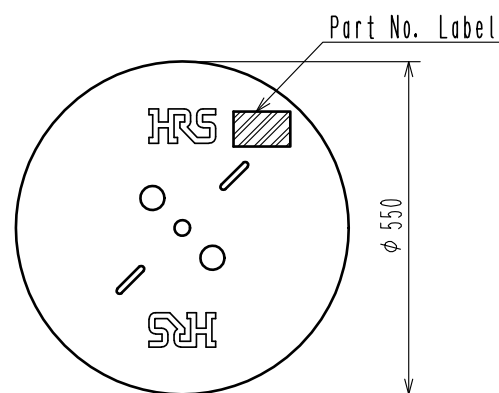

Detail of part No. Label

HRS		検査
品名コード	CL680-3057-0-00	
品名	DF60A-BPCFA	
数量	700	
仕様		
LOT No.		
機ざ目		

Section	Inspection
Lot No.	
Specification	
Quantity	
Part No.	
Code No.	

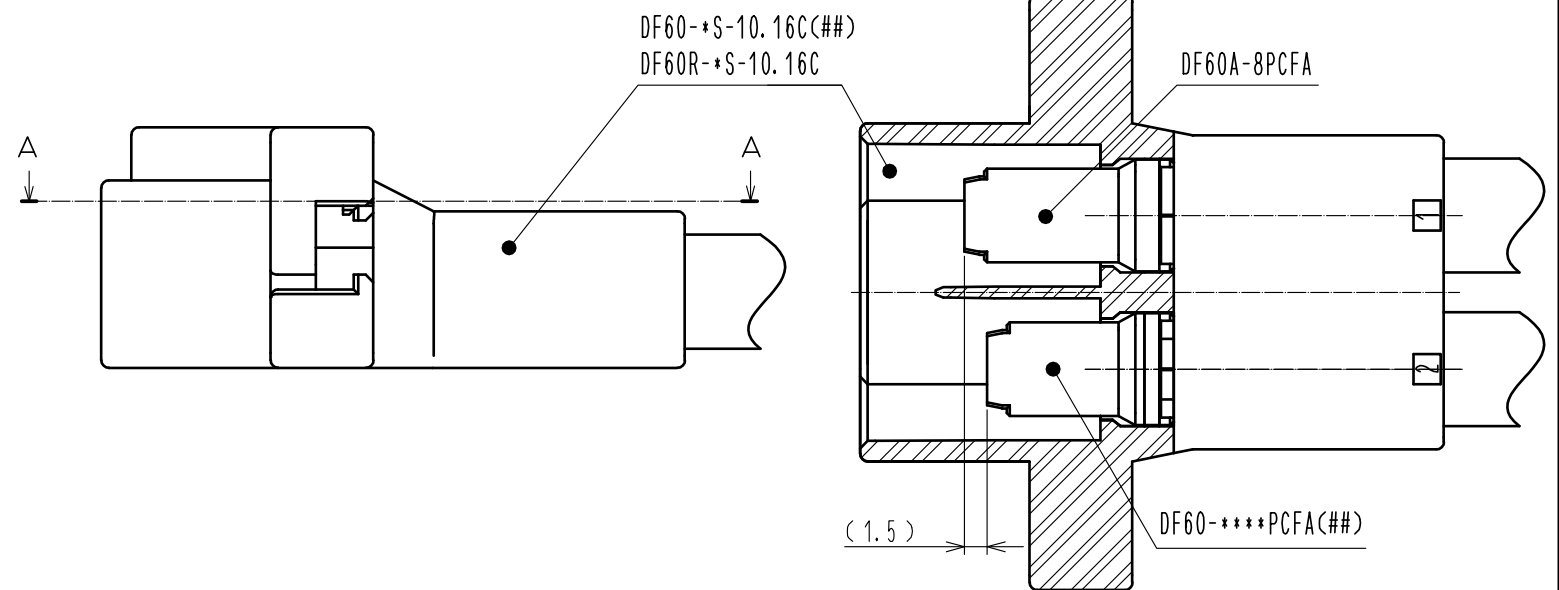

NOTE 1. 1Reel: 700 Contacts.

2 Style of Reel and Box Shows in Figure.

3. Please be sure to check the form of crimping with a cable while adjusting applicator.

4. This product is the sequential connection contact for DF60-8PCFA(##).

NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS					
UNITS				SCALE		COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
mm				2 : 1											
		HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		16.06.21		DRAWING NO.		EDC-367007-00-00					
				CHECED : TS. FUKUSHIMA		16.06.21		PART NO.		DF60A-8PCFA					
				DESIGNED : TS. KUMAZAWA		16.06.21		CODE NO.		CL680-3057-0-00					
				DRAWN : TS. KUMAZAWA		16.06.21				 1					

1 COPPER ALLOY
Contact Area
Surface : Au Plating 0.2μm min
Under Plating : Ni Plating 1μm min
Others : Ni Plating 0.2μm min