

LCCA30692-FT1.5



Configuration

- Connector 1: N Female BulkheadConnector 2: TNC Male Right Angle
- · Cable Type: RG58


Features

- 50 Ohm RF (Radio Frequency) Transmission
- RG58 stranded center conductor enhances flexibility
- · Same day shipping available

Applications

- · RFID systems up to 1 GHz
- · General Purpose Test and Measurements

- · Right angle body style accommodates tight fit applications
- Bulkhead design is ideal for panel mount applications
- · Heat shrink strain relief for a highly durable RF cable assembly
- · Wireless Infrastructure
- · GPS Timing and telematics

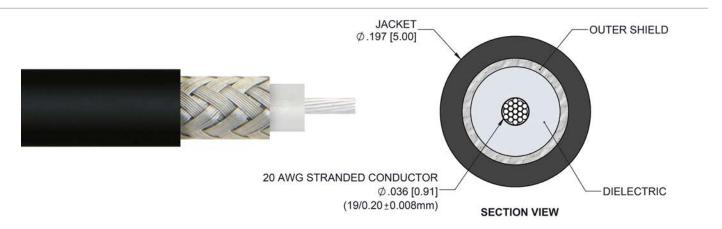

Description

L-com's LCCA30692-FT1.5 is a N female bulkhead to TNC male right angle cable assembly using RG58 coax, 1.5 FT and ships same-day. The RG58 coax of this N cable uses the PTFE dielectric with a VoP of 69.5%. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com N to TNC cable assembly has a female to male gender configuration with flexible RG58 series coax and operates to 1 GHz. The shielding of this N cable is comprised of tinned copper braid. L-com's RF cable assembly with N bulkhead interface enables system designers to have external connections on their product enclosures or to be used for other rack mount and panel mount applications. This right angle TNC cable interface on the RG58 coax allows for easier connections in tight spaces.

Custom versions of this N female to N male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30692-FT1.5 L-com N Female Bulkhead to TNC Male Right Angle Cable Assembly using RG58 Coax, 1.5 FT data sheet PDF includes details of the RF product specifications. CAD drawing(s) and dimensions below.

Electrical Specifications

Description Minimum Typical Maximum Units



LCCA30692-FT1.5



Frequency Range DC		1,000 MHz
VSWR		1.4:1
Velocity of Propagation	69.5	%
Capacitance	16.1 [52.82]	pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units	
Frequency	50	100	200	400	1,000	MHz	
Insertion Loss (Typ.)	0.35	0.37	0.41	0.47	0.62	dB	

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 per straight connector and 0.2 dB per right angle connector.

Mechanical Specifications

Cable Assembly

Length 18 in [457.2 mm]

Cable

Cable Type RG58
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper, Silver
Dielectric Type PTFE

Dielectric Type

Number of Shields

Shield Layer 1

Copper, Silver

PTFE

1

Tinned Copper Braid

Jacket Material PVC, Black
Jacket Diameter 0.197 in [5 mm]

Repeated Minimum Bend Radius 2 in [50.8 mm]



LCCA30692-FT1.5



Connectors

Connector 1	Connector 2	
N Female Bulkhead	TNC Male Right Angle	
50 Ohms	50 Ohms	
Brass, Gold	Brass, Gold	
PTFE	Acetal	
Brass, Nickel		
Brass, Nickel	Brass, Nickel	
	Brass, Nickel	
	N Female Bulkhead 50 Ohms Brass, Gold PTFE Brass, Nickel	

Environmental Specifications

Temperature

Operating Range

-20 to +80 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data


Notes:



LCCA30692-FT1.5



How to Order

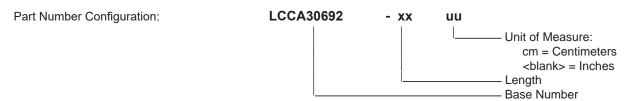

Example: LCCA30692-12 = 12 inches long cable

LCCA30692-100cm = 100 cm long cable

N Female Bulkhead to TNC Male Right Angle Cable Assembly using RG58 Coax, 1.5 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to instock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

