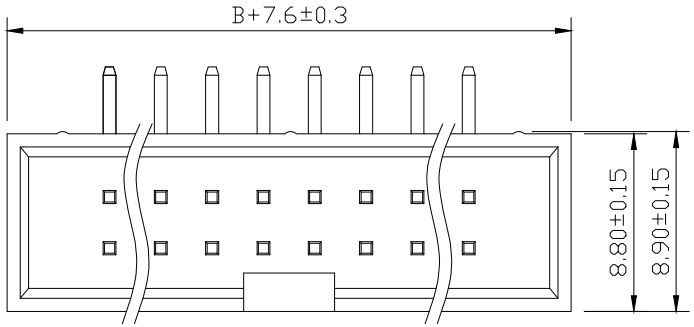

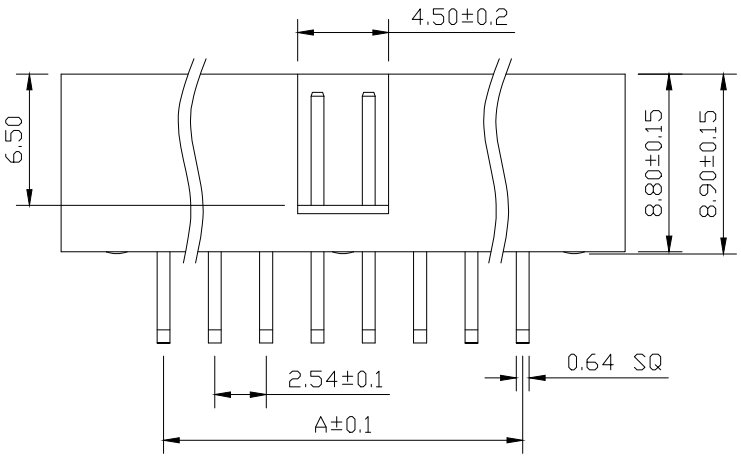

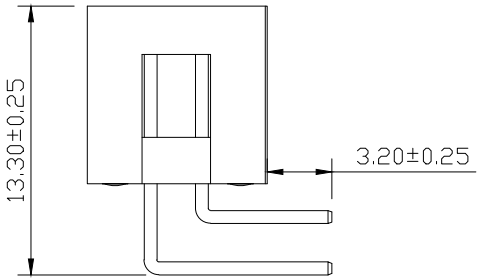

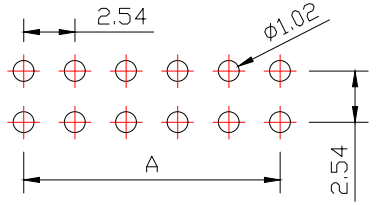

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance:1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature:-40° to+105°
Contact Material: Brass
Insrlator Material: Polyester(UL 94V-0)
Contact plating: Gold Flash
Standard: PA6T
Max.Processing Temp: 240° C for30-60seconds
(260° C for10seconds)

兆星精密电子（深圳）有限公司

UNLESS OTHEWIXE SPECIFIED TOLERANCE
X :±0.30 X° :±5°
X.X :±0.25 X.X° :±1°
X.XX:±0.20 X.XX° :±0.5°

DRAWM NAME: 2.54DC3-NPin H8.9 90度 PC3.2 PB13.3 L15.5/20.5 6T

SIZE	A4	SCALE	N:1	PROUCT NO.	ZX-IDC2.54-2-5PWZ		
REV	A	UNIT	mm	PROJECT		PAGE	1/1

CHECKED: CHECKED: / / APPROVED: / /

No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B
6	5.08	7.62	20	22.86	25.40	36	43.18	45.72
8	7.62	10.16	24	27.94	30.48	40	48.26	50.80
10	10.16	12.70	26	30.48	33.02	44	53.34	55.88
12	12.70	15.24	28	33.02	35.56	50	60.96	63.50
14	15.24	17.78	30	35.56	38.10	60	73.66	76.20
16	17.78	20.32	32	38.10	40.64	64	78.74	81.28
18	20.32	22.86	34	40.64	43.18			