


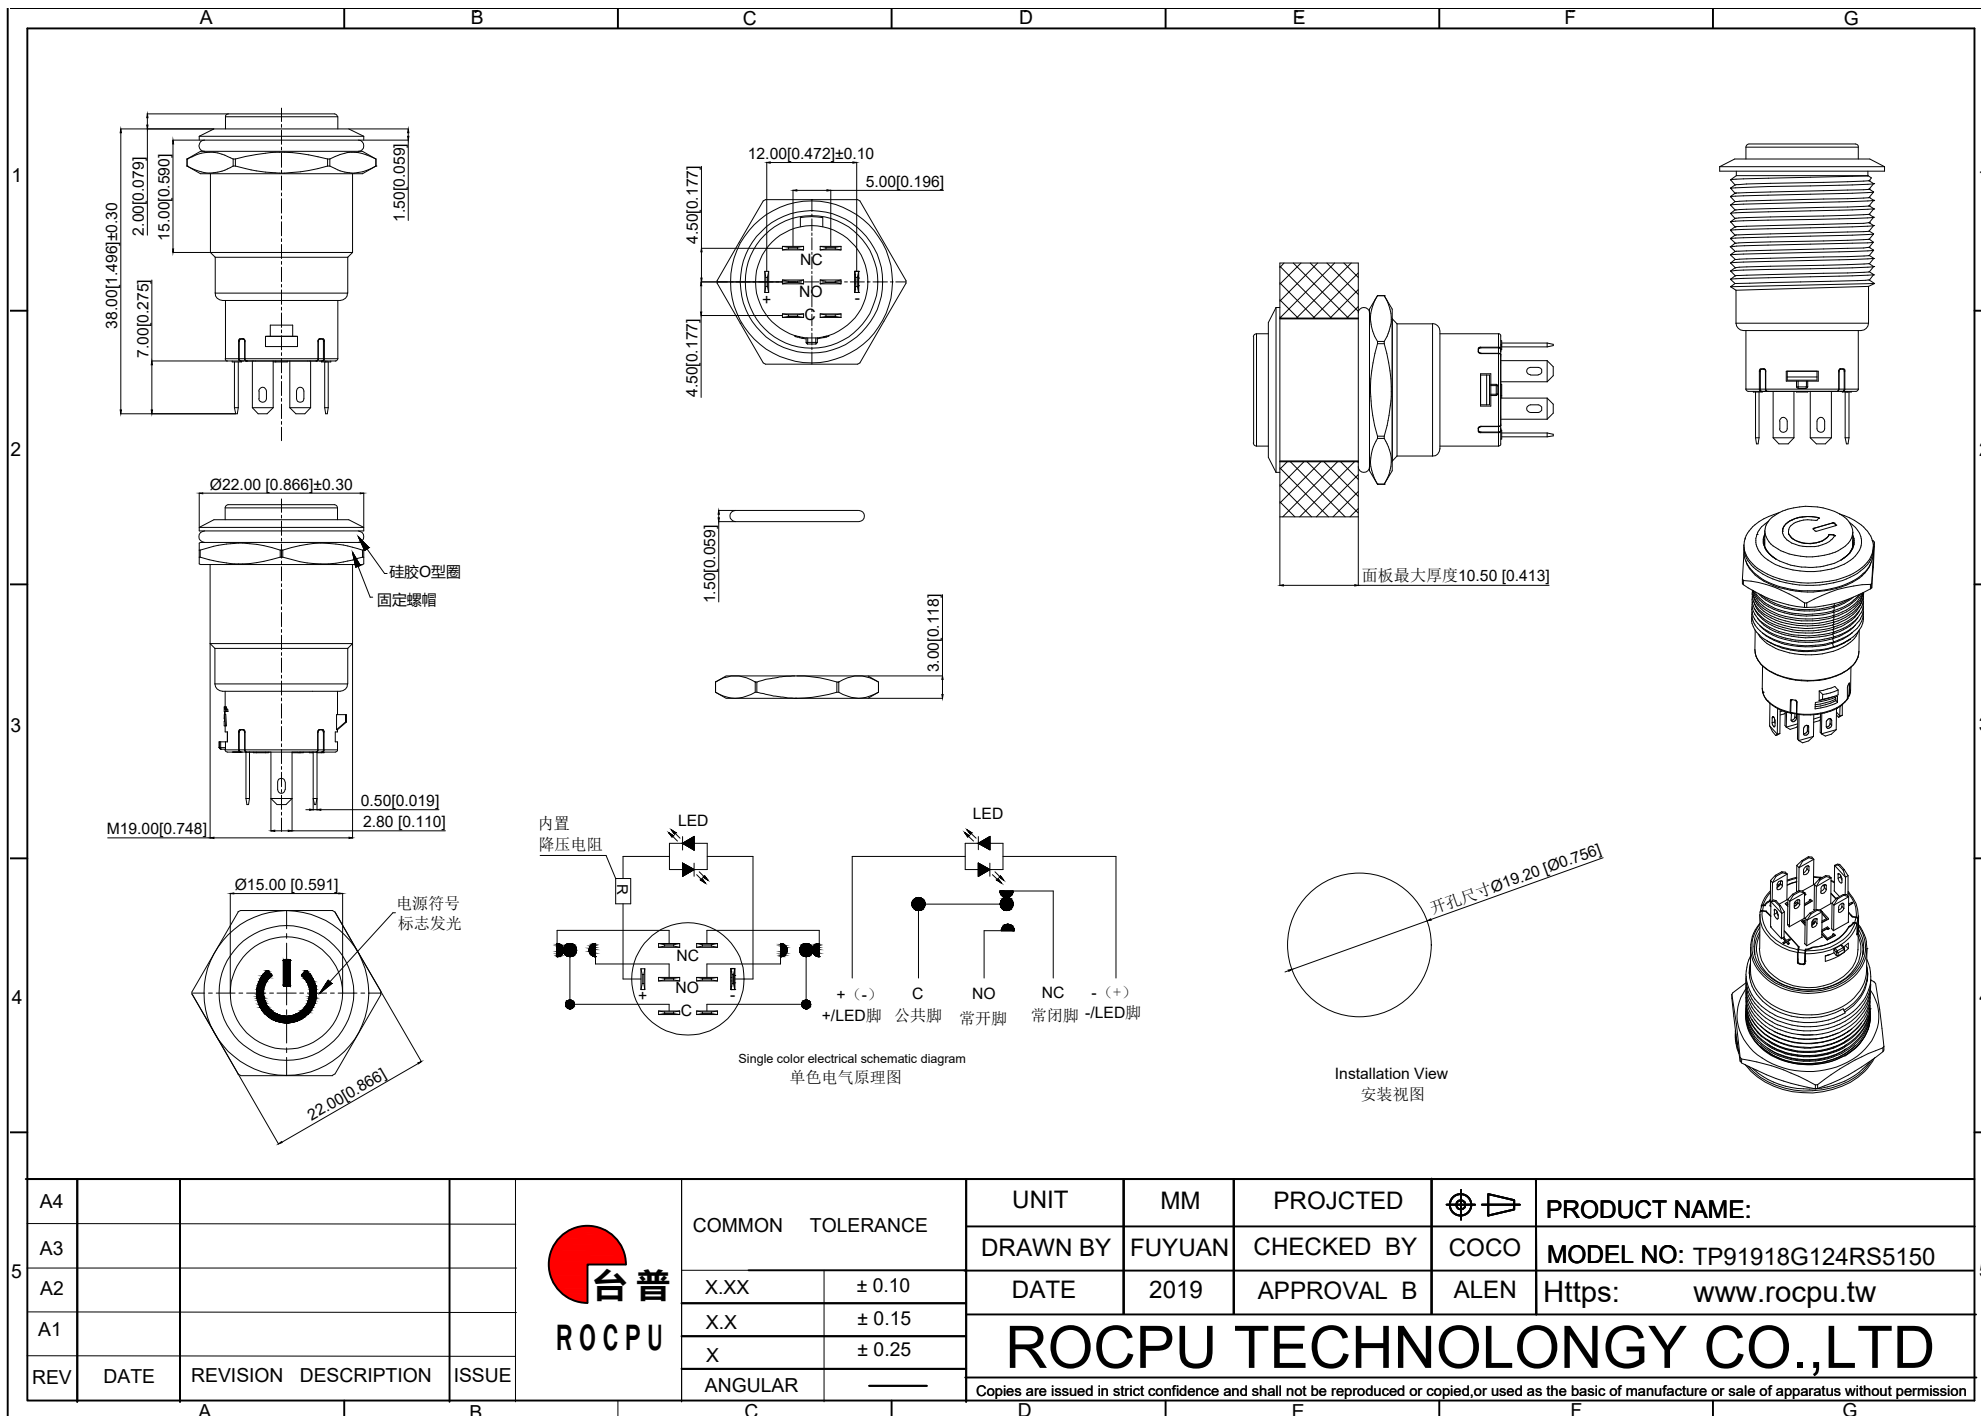

A		B		C		D		E		F		G	
1	性能参数												
	1. Heating current: Ui: AC250V, Ith: 5A 发热电流: Ui: AC250V, Ith: 5A						13. Electrical life: 500000 cycles 电气寿命: 500000 cycles						
	2. Rated current:3A/DC36V 额定电流:3A/DC36V						14. mechanical: 500000cycles 机械寿命: 500000cycles						
	3. Power-frequency withstand voltage:2000V1min 工频耐压:2000V1min						15. Operation method:Self-locking 操作方式: 自锁式						
	4. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ						16. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N						
	5. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ						17. LED lamp power consumption: 20m以下 LED灯功耗: 20m以下						
	6. Pressing stroke:3.00mm ± 0.10 按压行程:3.00mm ± 0.10						18. LED lamp lifespan: 40000h LED寿命: 40000h						
	7. Contact stroke:1.50mm±0.10 接触行程 :1.50mm±0.10						19. LED color: Red LED颜色: 红色						
	8. Nut assembly torque:5-14N 螺帽装配力矩:5-14N												
	9. Protection level:IP67 防护等级:IP67												
2													
	10. Explosion prevention level: IK10 防暴等级: IK10												
	11. Working environment temperature: -20 ℃~+55 ℃ 工作环境温度: -20 ℃~+55 ℃												
	12. Compression torque: ≤ 6N 按压扭力: ≤6N												
3	连接形式												
	1. Welding temperature of wire: 320 ± 20 ℃ 线材焊接温度: 320±20℃ Wire welding duration: less than 3 seconds 线材焊接时长: 时长3秒以下												
	2. Can be used with dedicated connectors: 可配专用接插件使用:												
	2.1 1NO1NCSwitch function wire: green (C) blue wire (NO) yellow wire (NC) 1NO1NC开关功能线材: 绿色(C) 蓝线 (NO) 黄线 (NC)												
	2.2 2NO2NC switch function wire: green black wire (C), blue black wire (NO), yellow white wire (NC) 2NO2NC开关功能线材: 绿黑线 (C)、蓝黑线 (NO)、黄白线(NC)												
	2.3 LED functional wire: red wire positive pole, black wire negative pole, LED without distinction between positive and negative poles LED功能线材: 红线正极, 黑线负极, LED不分正负极												
4													
5													

		A		B		C		D		E		F		G	
1															
2															
3															
4															
5															
6															
7															
8															
9															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
25															
26															
27															
28															
29															
30															
31															
32															
33															
34															
35															
36															
37															
38															
39															
40															
41															
42															
43															
44															
45															
46															
47															
48															
49															
50															
51															
52															
53															
54															
55															
56															
57															
58															
59															
60															
61															
62															
63															
64															
65															
66															
67															
68															
69															
70															
71															
72															
73															
74															
75															
76															
77															
78															
79															
80															
81															
82															
83															
84															
85															
86															
87															
88															
89															
90															
91															
92															
93															
94															
95															
96															
97															
98															
99															
100															
101															
102															
103															
104															
105															
106															
107															
108															
109															
110															
111															
112															
113															
114															
115															
116															
117															
118															
119															
120															
121															
122															
123															
124															
125															
126															
127															
128															
129															
130															
131															
132															
133															
134															
135															
136															
137															
138															
139															
140															
141															
142															
143															
144															
145															
146															
147															
148															
149															
150															
151															
152															
153															
154															
155															
156															
157															
158															
159															
160															
161															
162															
163															
164															
165															
166															
167															
168															
169															
170															
171															
172															
173															
174															
175															
176															
177															
178															
179															
180															
181															
182															
183															
184															
185															
186															
187															
188															
189															
190															
191															
192															
193															
194															
195															
196															
197															
198															
199															
200															
201															
202															
203															
204															
205															
206															
207															
208															
209															
210															
211															
212															
213															
214															
215															
216															
217															
218															
219															
220															
221															
222															
223															
224															
225															
226															
227															
228															
229															
230															
231															
232															
233															
234															
235															
236															
237															
238															
239															
240															
241															
242															
243															
244															
245															
246															
247															
248															
249															
250															
251															
252															
253															
254															
255															
256															
257															
258															

性能参数

- 1.L1-导线长度：默认150MM长；
- 2.L2-线头长度：默认10MM
- 3.L3-剥头长度：默认3MM
- 4.S-导线导体横截面积：默认0.5平方MM、可选0.3平方MM
- 5.线型拉力N：（0.15-0.25MM）≤30N、（0.3MM）≤40N、（0.5MM）≤50N、（0.75MM）≤60N
- 6.需要其他线长、线型、可以定制

材质参数


- 1.插壳：浅蓝色尼龙胶壳
- 2.端子：磷铜y镀锡色
- 3.导电线材：紫铜

线束使用说明

- 1.2线：用于单色的指示灯、无开关功能
- 2.3线：用于双色指示灯、无开关功能
- 3.4线：用于三色灯的指示灯、无开关功能
- 4.3线：用于1N0/1N01NC开关、无指示灯功能
- 5.6线：用于2N0/2N02NC开关、无指示灯功能
- 6.5线：用于1N0/1N01NC、单色指示灯带开关功能
- 7.8线：用于2N0/2N02NC、单色指示灯带开关功能
- 8.6线：用于1N0/1N01NC、双色指示灯带开关功能
- 9.7线：用于1N0/1N01NC、三色或220v双色指示灯带开关功能

A4				 台普 ROC PU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP91918G124RS5150
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
A1					X.X	± 0.15	ROC PU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION	ISSUE	X	± 0.25					
					ANGULAR	—	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basis of manufacture or sale of apparatus without permission				

19MM系列双排单色按钮开关接线说明

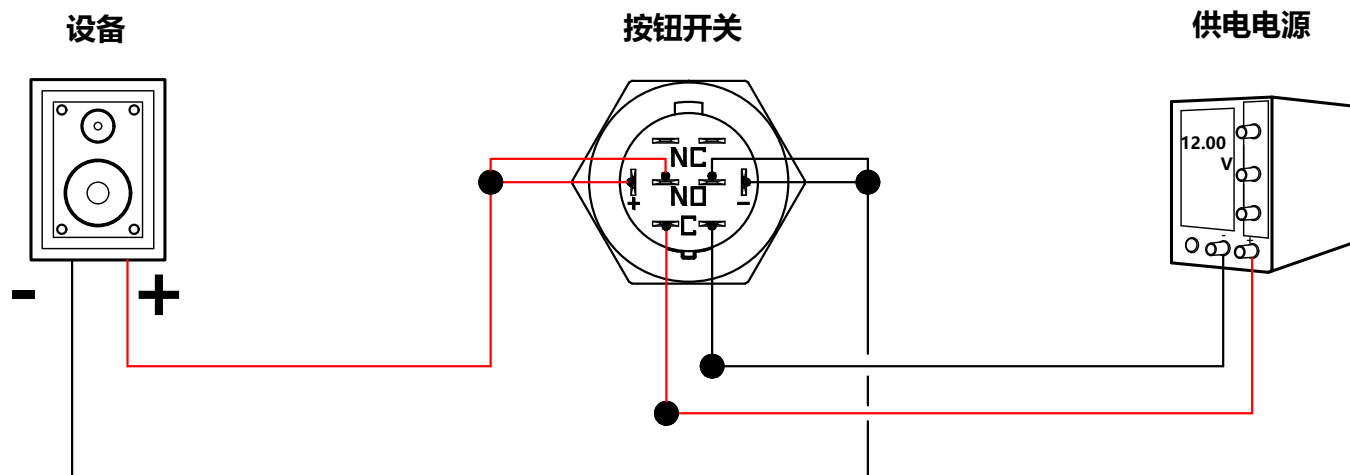

接线说明:

- 1、供电电源的正极、按钮开关左边的C脚，接一起。
- 2、供电电源的负极，按钮开关右边的C脚，接一起。
- 3、设备的正极，按钮开关的左NO脚、按钮开关的LED正极，并接一起。
- 4、设备的负极，按钮开关的右NO脚、按钮开关的LED负极，并接一起

实现功能:

- 1、按钮开关按下时: 设备正负极都通电, 按钮开关LED灯亮。
- 2、按钮开关按回去时: 设备正负极都断电, 按钮开关LED灯灭。

注: 说明图的电压为接线参考使用, 电源电压根据实际供电电压为准。

红线为正极 (火线)

黑线为负极 (零线)

A4				 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO:
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
A1					X.X	± 0.15	ROCPCU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION	ISSUE	X	± 0.25					
					ANGULAR	—	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basis of manufacture or sale of apparatus without permission				