

Analog Displacement Sensors for Off-Road Applications



FEATURES

- Conductive plastic potentiometer technology
- Use in engine compartment
- Wire or connector outputs
- Lever drive with return spring
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


**RoHS
COMPLIANT**

DESIGN SUPPORT TOOLS

[click logo to get started](#)
3D
Models
Available

QUICK REFERENCE DATA	
Sensor type	ROTATIONAL, conductive plastic
Output type	Output by integrated connector or wires
Market appliance	Transportation
Dimensions	39.5 mm x 31.5 mm x 23.37 mm

ELECTRICAL SPECIFICATIONS	
PARAMETER	
Total electrical travel	95° ± 1.5°
Independent linearity	± 1.5 %
Inter-linearity	± 3 %
Total resistance (R _n)	2 x 4 kΩ ± 20 % in //
Output smoothness	< 0.1 % (NFC 93255)
Power rating at +40 °C	0.5 W
Power rating at +125 °C	0.05 W
Wiper current limiting resistance (R _p)	2 x 1.7 kΩ ± 20 %
Recommended wiper current	≤ 100 µA
Maximum wiper current	15 mA for 1 min
Recommended load impedance	≥ 100 R _n

MECHANICAL SPECIFICATIONS	
PARAMETER	
Mechanical rotation	125° ± 5°
Lever return torque at start of travel	≥ 1.5 N cm
Lever return torque at end of travel	≤ 8.5 N cm
Stop strength	60 N cm
Lever return	Anti-clockwise
Protection class	IP 67
Mounting screw tightening torque	2.3 N m maximum

PERFORMANCE	
PARAMETER	
Operating temperature range	-40 °C to +125 °C
Storage temperature range	-55 °C to +135 °C
Vibrations	Severity 10 Hz to 2000 Hz, 10 mm or 50 g
Life	5M cycles (TET)
Micro-movements (dither stroke)	> 50M cycles

Note

- Nothing stated herein shall be construed as a guarantee of quality or durability

SAP PART NUMBERING GUIDELINES - PMR410 / PMR420

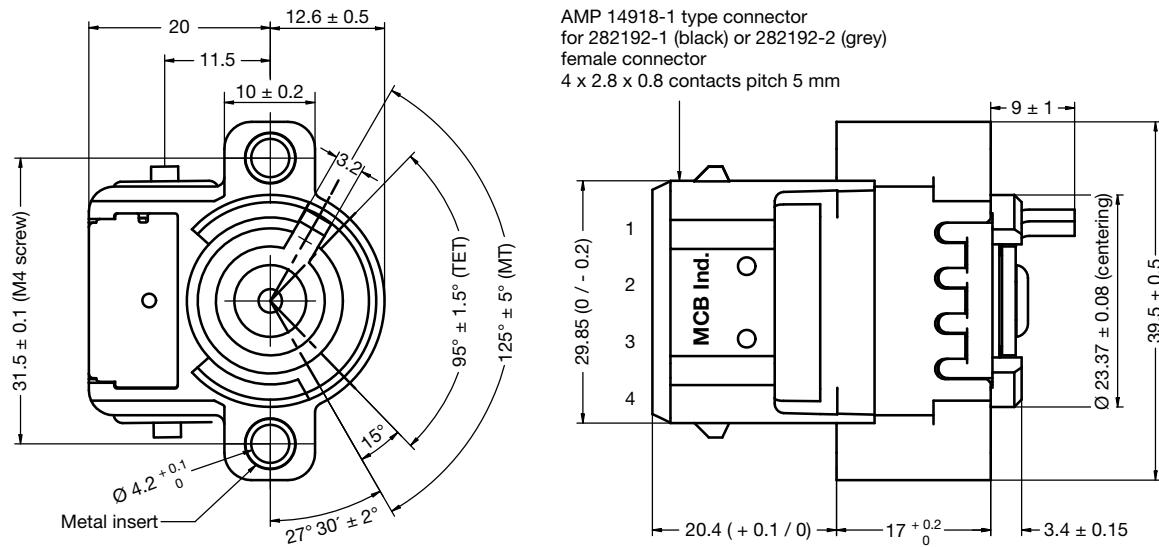
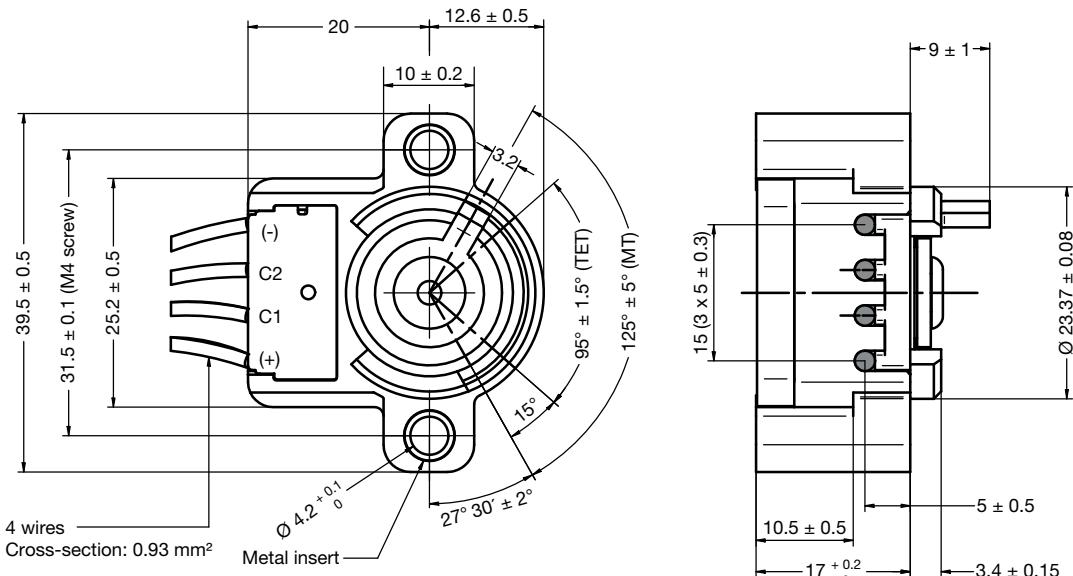
MODEL	TYPE	LEVER TYPE	VALUE	ANGLE	LEADS	PACKAGING
PMR4	10 = redundant with integrated connector output 20 = redundant with wires output	A = lever A C = lever C	202 = 2K0 (2 x 4 kΩ in //)	095	I = integrated connector (for PMR410) W = wire (for PMR420)	C = 20 pcs G = 100 pcs M = 400 pcs

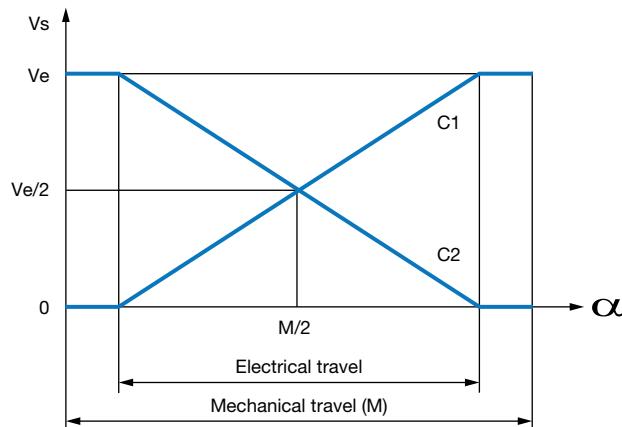
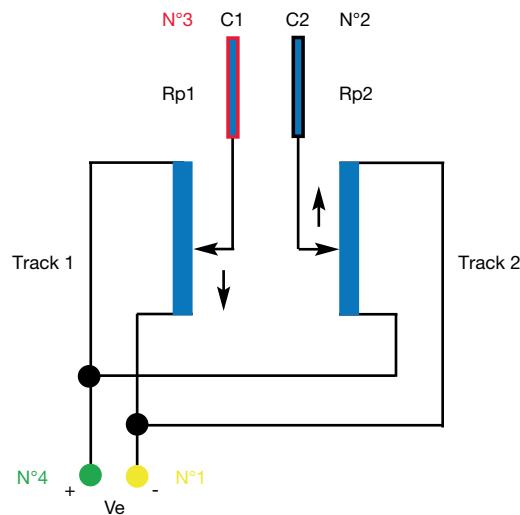
CONNECTIONS

Type PMR410: AMP 142918-1 type integrated connector outputs

Type PMR420: Wire outputs (RoHS compliance to confirm in function of wires)

DIMENSIONS in millimeters

PMR410

PMR420


ELECTRICAL DIAGRAM

OPTIONS (on request)

- Other electrical travel
- Other total resistance
- Other linearity
- No protection resistance (R_p)
- Other lever

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.