


SOT-23

Features

280Watts peak pulse power($t_p=8/20\mu s$)

Low clamping voltage

Low leakage current

Glass passivated junction

IEC 61000-4-2 ±30KV contact ± 30KV air

Halogen free and RoHS compliant

Mechanical Data

CASE: SOT23 Molded Plastic

Molding compound flammability rating: UL 94V-0

Mounting Position: Any

Making Code & Ordering information

 CB2	<table border="1"> <thead> <tr> <th>Ordercode</th><th>Package</th><th>Base qty</th><th>Deliverymode</th></tr> </thead> <tbody> <tr> <td>PESD2CANFD24V-K</td><td>SOT-23</td><td>3000</td><td>Tape and reel</td></tr> </tbody> </table>	Ordercode	Package	Base qty	Deliverymode	PESD2CANFD24V-K	SOT-23	3000	Tape and reel
Ordercode	Package	Base qty	Deliverymode						
PESD2CANFD24V-K	SOT-23	3000	Tape and reel						

Maximum Ratings & Thermal Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified.)

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20\mu s$)	P_{PP}	280	Watts
Peak Pulse Current ($t_p=8/20\mu s$) (note1)	I_{PP}	6	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	30 30	kV
Lead Soldering Temperature	T_L	260(10seconds)	°C
Junction Temperature	T_J	-55 to + 125	°C
Storage Temperature	T_{stg}	-55 to + 125	°C

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Stand-Off Voltage	V_{RWM}				24.0	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	26.7	30.0	34.0	V
Reverse Leakage Current	I_R	$V_{RWM}=24V, T=25^\circ C$		0.1	0.5	μA
Peak Pulse Current	I_{PP}	$t_p=8/20\mu s$			6	A
Clamping Voltage	V_C	$I_{PP}=6A, t_p=8/20\mu s$			48	V
Junction Capacitance	C_j	$V_R = 0V, f = 1MHz$		12	15	pF

Ratings and Characteristic Curves

(Ratings at 25°C ambient temperature unless otherwise specified).

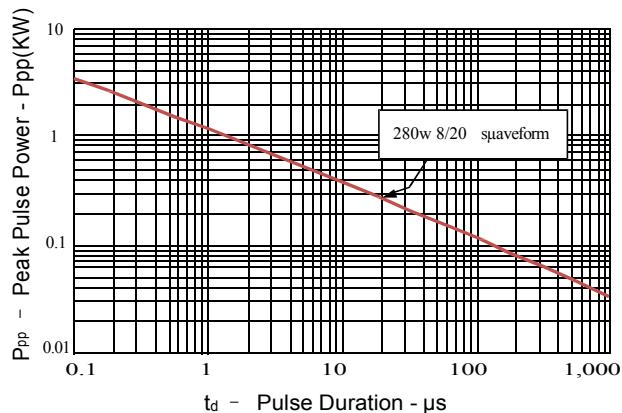


Figure 1: Peak Pulse Power vs. Pulse Time

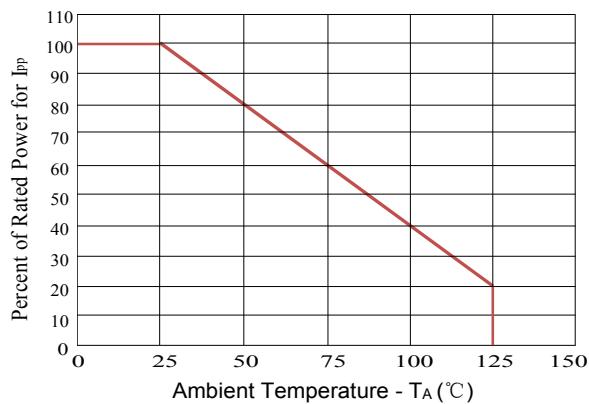


Figure 2: Power Derating Curve

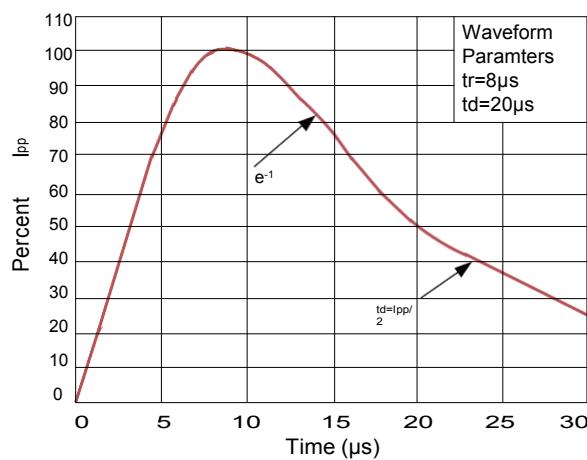


Figure 3: Pulse Waveform


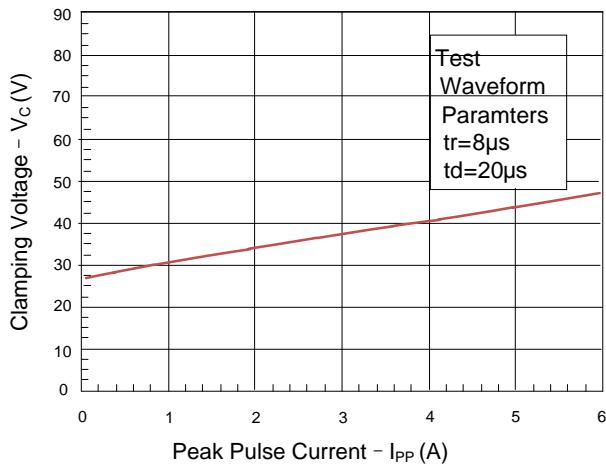


Figure 4: Clamping Voltage vs. Ipp

Package Outline Dimensions: SOT-23

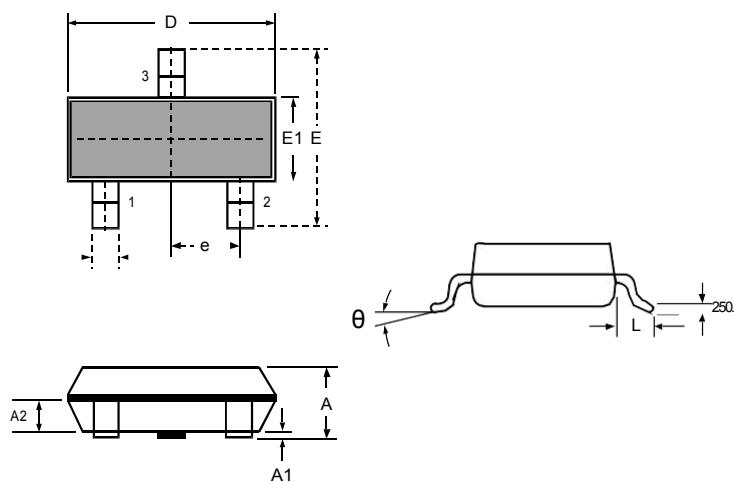

SYMBOL	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
D	2.800	3.000	0.110	0.118
b	0.300	0.500	0.012	0.020
E	2.250	2.550	0.089	0.100
E1	1.200	1.400	0.047	0.055
e	0.950 BSC		0.037 BSC	
L	0.300	0.500	0.012	0.020
θ	0	8°	0	8°