




Connectors > PCB Connectors > PCB Headers & Receptacles > CT Box Header SMT: Vert, Shrouded

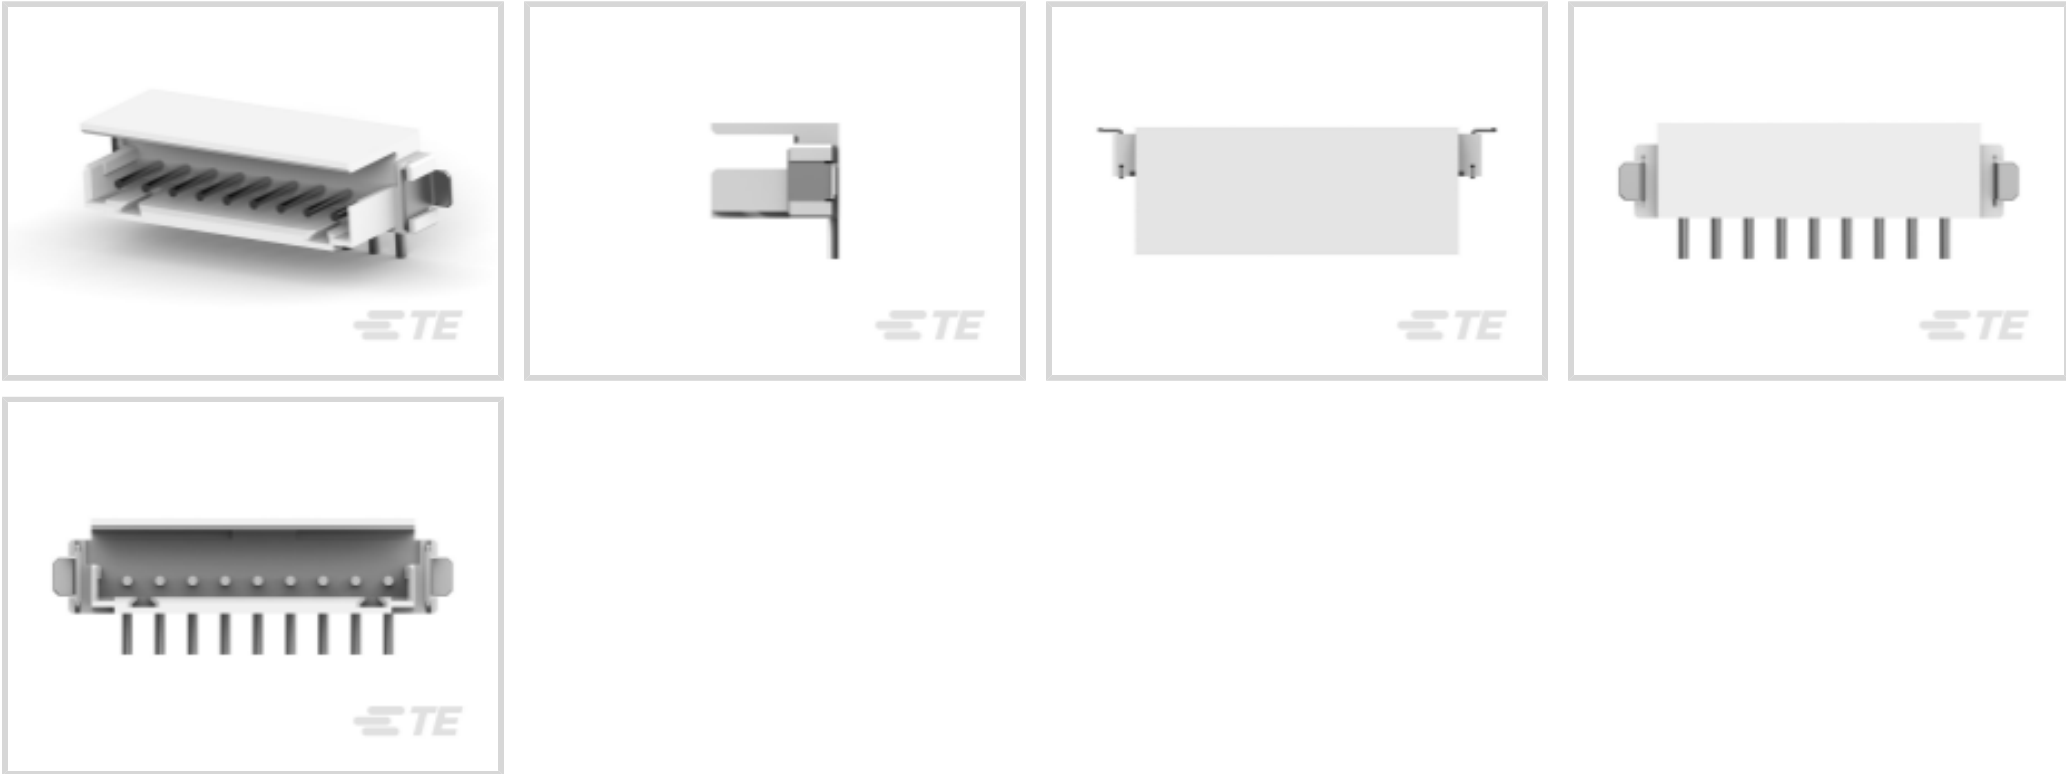

Connector System: **Wire-to-Board**  
Number of Positions: **9**  
Number of Rows: **1**  
Centerline (Pitch): **2 mm [.078 in]**  
PCB Mount Orientation: **Vertical**

[All CT Box Header SMT: Vert, Shrouded \(34\)](#)

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Connector System                  | Wire-to-Board         |
| Header Type                       | Partially Shrouded    |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |
| PCB Connector Assembly Type       | PCB Mount Header      |

Configuration Features

|                       |          |
|-----------------------|----------|
| Number of Positions   | 9        |
| Number of Rows        | 1        |
| PCB Mount Orientation | Vertical |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 125 VAC |
|-------------------|---------|

Body Features

|  |  |
|--|--|
|  |  |
|--|--|



|                       |         |
|-----------------------|---------|
| Primary Product Color | Natural |
|-----------------------|---------|

Contact Features

|   |                             |
|---|-----------------------------|
| Contact Mating Area Length                              | 4.5 mm[.177 in]             |
| PCB Contact Termination Area Plating Material Thickness | 1 – 2 µm[39.37 – 78.73 µin] |
| Contact Layout  | Inline                      |
| Mating Pin Diameter                                     | .6 mm[.024 in]              |
| Contact Shape & Form                                    | Round                       |
| Contact Mating Area Plating Material Finish             | Bright                      |
| PCB Contact Termination Area Plating Material           | Tin                         |
| Contact Base Material                                   | Brass                       |
| Contact Mating Area Plating Material                    | Tin                         |
| Contact Type  | Pin                         |
| Contact Current Rating (Max)                            | 4 A                         |

Termination Features

|   |                |
|---|----------------|
| Round Termination Post & Tail Diameter      | .6 mm[.024 in] |
| Termination Method to Printed Circuit Board | Surface Mount  |

Mechanical Attachment

|                          |              |
|--------------------------|--------------|
| Mating Alignment Type    | Polarization |
| Mating Retention         | Without      |
| Panel Mount Feature      | With         |
| PCB Mount Retention Type | Solder Peg   |
| Connector Mounting Type  | Board Mount  |
| Mating Alignment         | With         |
| PCB Mount Alignment      | Without      |
| PCB Mount Retention      | With         |

Housing Features

|                    |               |
|--------------------|---------------|
| Housing Material   | 6T PA(GF)     |
| Centerline (Pitch) | 2 mm[.078 in] |

Dimensions

|                  |                 |
|------------------|-----------------|
| Connector Length | 19.8 mm[.78 in] |
| Connector Height | 7.8 mm[.307 in] |
| Connector Width  | 5.8 mm[.228 in] |



|                             |                       |
|-----------------------------|-----------------------|
| PCB Thickness (Recommended) | .8 mm[.031 – .063 in] |
|-----------------------------|-----------------------|

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 – 105 °C[-40 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                          |                      |
|--------------------------|----------------------|
| Assembly Process Feature | Pick and Place Cover |
| Circuit Application      | Power & Signal       |

Industry Standards

|                        |                       |
|------------------------|-----------------------|
| Agency/Standard        | CSA, UL               |
| Approved Standards     | CSA LR7189, UL E28476 |
| UL Flammability Rating | UL 94V-0              |

Packaging Features

|                    |           |
|--------------------|-----------|
| Packaging Quantity | 700       |
| Packaging Type     | Box, Tape |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|   |   |
|---|---|
| EU RoHS Directive 2011/65/EU                  | Compliant   |
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JUNE 2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free   |
| Solder Process Capability                     | Reflow solder capable to 245°C  |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-AM7017-C7671  
Common Termination Contacts — POWER TRIPLE LOCK

TE Part # CAT-AM7017-H8172  
AMP COMMON TERMINATION HOUSINGS

TE Part # 1-353293-3  
MINI CT MT REC ASSY 13P GRAY

Also in the Series | AMP CT

Connector Contacts(8)

Connector Hardware(46)

PCB Headers & Receptacles(756)

Wire-to-Board Connector Assemblies & Housings(256)

Customers Also Bought

TE Part #292175-5  
CT Box Header SMT: Vert, Shrouded

TE Part #1888247-1  
20 POS SMT CONN, SFP/SFP+, 30A

TE Part #9-2176390-0  
RQ 1206 9K76 0.1% 10PPM 5K RL


TE Part #292230-9  
1.5 MINI CT SGL V SMT W/BOSS 9

TE Part #292227-5  
1.5 MINI CT SGL H SMT W BOSS 5

TE Part #1-2308397-1  
1.5 MINI CT SGL V SMT W/BOSS 11

TE Part #1-2308397-3  
1.5 MINI CT SGL V SMT W/BOSS 13

TE Part #1-2308397-7  
1.5 MINI CT SGL V SMT W/BOSS 17

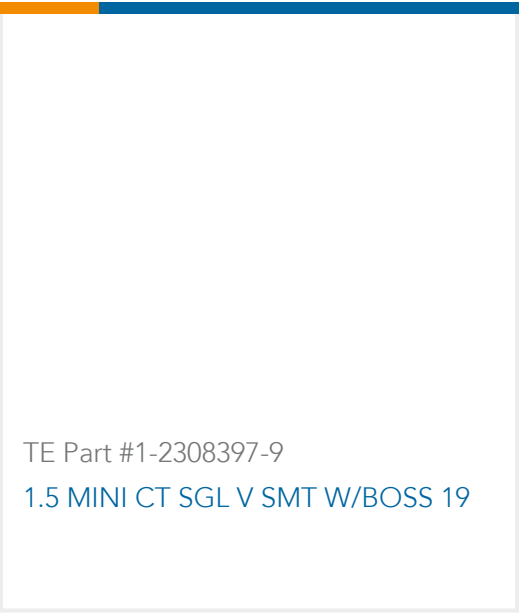

Documents

Product Drawings

CT BOX HDR V SMT 9P O/TAPE NAT

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_292175-9\_A1.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_292175-9\_A1.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_292175-9\_A1.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Product Specification

English

AMP COMMON TERMINATION (CT), CONNECTOR, 2mm PITCH, M/T TYPE, LEAD FREE VERSION

Japanese

Product Specification

Japanese

Product Environmental Compliance

MD\_292175-9\_062020181148\_dmtec

English

MD\_292175-9\_062020181148\_dmtec

English