

ST-5ES1N8AW400S - Device connector front mounting



1607727

<https://www.phoenixcontact.com/us/products/1607727>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, straight, for standard and SPEEDCON interlock, M17, number of positions: 5+PE, contact connection type: Socket, shielded: yes, flange dimensions: 21.6 mm x 21.6 mm, degree of protection: IP67, number of positions: 6, connection method: Crimp connection, series: ST

Your advantages

- Consistent EMC protection for reliable connection solutions in the industrial environment
- Crimping connection: vibration- and temperature-resistant assembly
- Flexible mounting, thanks to snap-in contact inserts

Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1607727             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | AB32                |
| Product key                          | ABRBEL              |
| Catalog page                         | Page 135 (C-2-2019) |
| GTIN                                 | 4046356274296       |
| Weight per piece (including packing) | 40 g                |
| Weight per piece (excluding packing) | 27 g                |
| Customs tariff number                | 85366990            |
| Country of origin                    | DE                  |

# ST-5ES1N8AW400S - Device connector front mounting



1607727

<https://www.phoenixcontact.com/us/products/1607727>

## Technical data

### Notes

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General     | Order crimp contacts Ø 1 mm separately                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Safety note |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Safety note | <p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none"><li>• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li><li>• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li><li>• The products are suitable for applications in plant, controller, and electrical device engineering.</li><li>• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li><li>• Assembled products may not be manipulated or improperly opened.</li><li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li><li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li><li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li><li>• Ensure that the protective or functional ground has been properly connected.</li><li>• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li><li>• Only use tools recommended by Phoenix Contact</li><li>• The installation notes/Design In documents online on the download page at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> must be observed for this product.</li><li>• Operate the connector only when it is fully plugged in and interlocked.</li><li>• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li><li>• Observe the minimum bending radius of the cable. Lay the cable without twisting it.</li><li>• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting</li></ul> |

# ST-5ES1N8AW400S - Device connector front mounting



1607727

<https://www.phoenixcontact.com/us/products/1607727>

warnings (e.g. DIN EN ISO 13732-1:2008-12).

## Mounting

|                   |                  |
|-------------------|------------------|
| Connection method | Crimp connection |
|-------------------|------------------|

## Product properties

|                     |                                   |
|---------------------|-----------------------------------|
| Product type        | Circular connectors (device side) |
| Number of positions | 6                                 |
| Connection profile  | 5+PE                              |
| Application         | Power                             |
| Series              | ST                                |
| Shielded            | yes                               |
| Coding              | N                                 |
| Thread type         | M17                               |

## Dimensions

### Housing

|                   |                   |
|-------------------|-------------------|
| Flange dimensions | 21.6 mm x 21.6 mm |
|-------------------|-------------------|

## Material specifications

|                  |       |
|------------------|-------|
| Seal material    | FPM   |
| Housing material | Metal |

## Electrical properties

### Contact

|                       |       |
|-----------------------|-------|
| Contact diameter      | 1 mm  |
| Max. current          | 14 A  |
| Nominal voltage $U_N$ | 630 V |
| Overvoltage category  | III   |
| Degree of pollution   | 3     |
| Rated surge voltage   | 6 kV  |

### Contact

|                  |      |
|------------------|------|
| Contact diameter | 1 mm |
|------------------|------|

## Connection data

### Conductor connection

|                         |                  |
|-------------------------|------------------|
| Connection method       | Crimp connection |
| Contact connection type | Socket           |

## Connector

|                       |          |
|-----------------------|----------|
| Type                  | straight |
| Direction of rotation | Standard |

# ST-5ES1N8AW400S - Device connector front mounting



1607727  
<https://www.phoenixcontact.com/us/products/1607727>

|              |        |
|--------------|--------|
| Connection 1 |        |
| Head design  | Socket |

## Environmental and real-life conditions

|                                 |                   |
|---------------------------------|-------------------|
| Ambient conditions              |                   |
| Degree of protection            | IP67              |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Altitude                        | 3000 m            |


# ST-5ES1N8AW400S - Device connector front mounting

1607727

<https://www.phoenixcontact.com/us/products/1607727>


## Drawings

Diagram

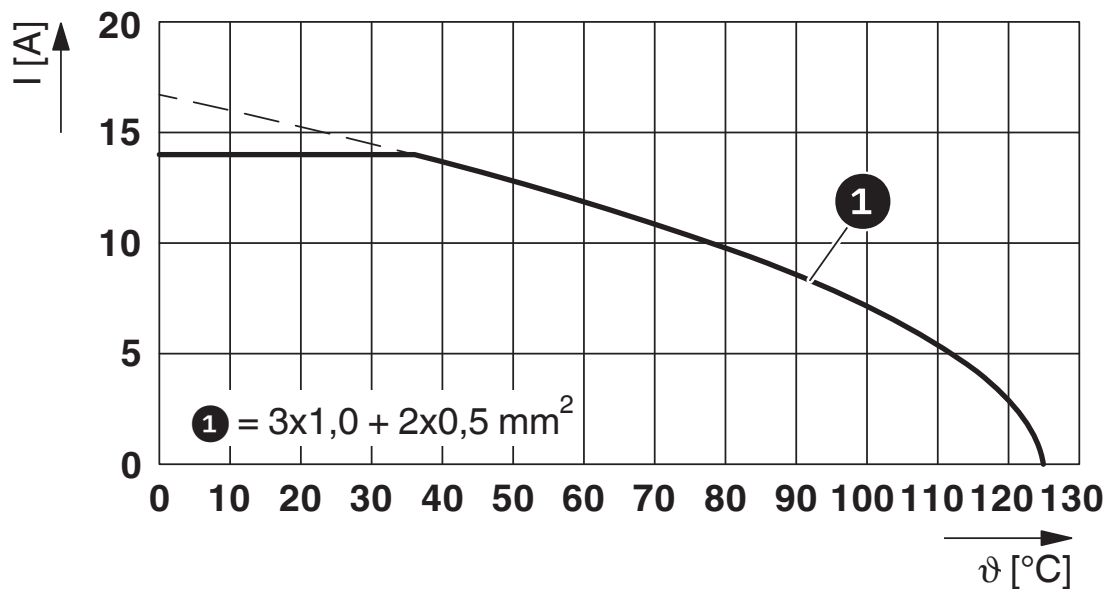

$I$  = current strength,  $\vartheta$  = ambient temperature,  $3 \times 14 \text{ A} + 2 \times 2 \text{ A}$  constant

Dimensional drawing

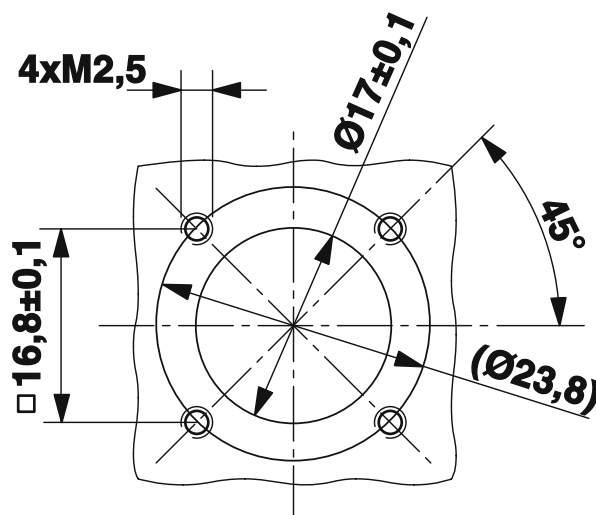


## Installation dimensions

# ST-5ES1N8AW400S - Device connector front mounting

1607727


<https://www.phoenixcontact.com/us/products/1607727>

Dimensional drawing

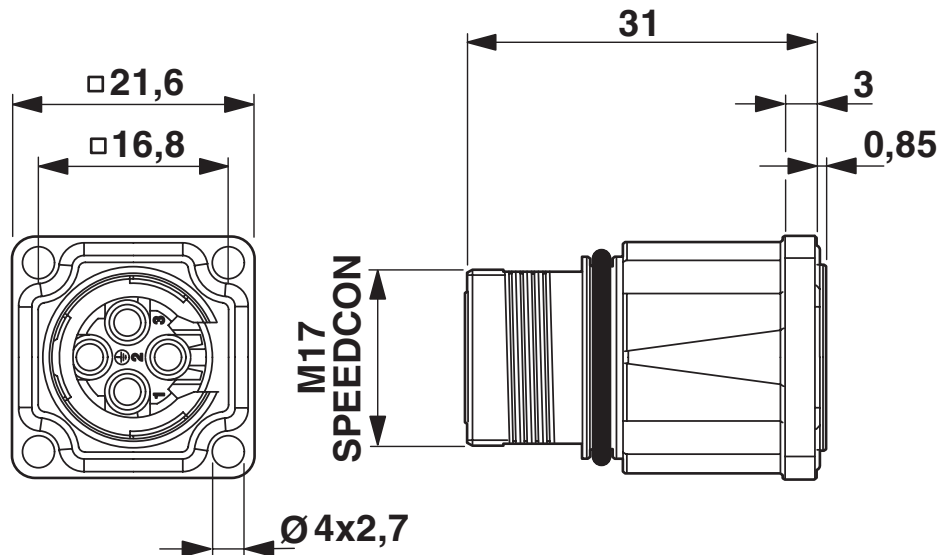

Dimensional drawing

Schematic diagram

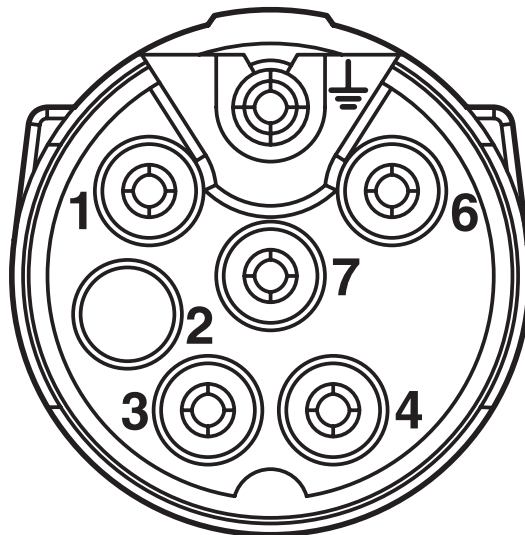

Connector pin assignment

1607727  
<https://www.phoenixcontact.com/us/products/1607727>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1607727>



**cUL Recognized**  
Approval ID: E335019-20111129



**UL Recognized**  
Approval ID: E335019-20111129

|                                                                                   |                                                   |                       |                   |                             |
|-----------------------------------------------------------------------------------|---------------------------------------------------|-----------------------|-------------------|-----------------------------|
|  | <b>UL Listed</b><br>Approval ID: E468743-20210825 |                       |                   |                             |
|                                                                                   | Nominal voltage $U_N$                             | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Power                                                                             | 600 V                                             | 10 A                  | -                 | - 18                        |
| Signal                                                                            | 60 V                                              | 2 A                   | -                 | - 20                        |

|                                                                                     |                                                    |                       |                   |                             |
|-------------------------------------------------------------------------------------|----------------------------------------------------|-----------------------|-------------------|-----------------------------|
|  | <b>cUL Listed</b><br>Approval ID: E468743-20210825 |                       |                   |                             |
|                                                                                     | Nominal voltage $U_N$                              | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Power                                                                               | 600 V                                              | 8 A                   | - 18              | -                           |
| Signal                                                                              | 60 V                                               | 2 A                   | - 20              | -                           |



**UL Recognized**  
Approval ID: E153698-20140124



**cUL Recognized**  
Approval ID: E153698-20140124

**cULus Listed**

# ST-5ES1N8AW400S - Device connector front mounting



1607727

<https://www.phoenixcontact.com/us/products/1607727>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440102 |
| ECLASS-12.0 | 27440116 |
| ECLASS-13.0 | 27440116 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002635 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# ST-5ES1N8AW400S - Device connector front mounting



1607727  
<https://www.phoenixcontact.com/us/products/1607727>

## Environmental product compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# ST-5ES1N8AW400S - Device connector front mounting



1607727

<https://www.phoenixcontact.com/us/products/1607727>

## Accessories

### ST-10KS010 - Crimp contact

1618239

<https://www.phoenixcontact.com/us/products/1618239>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.06 mm<sup>2</sup> ... 0.25 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1243216

---

### ST-10KS035 - Crimp contact

1618464

<https://www.phoenixcontact.com/us/products/1618464>



Crimp contact, Socket, turned, contact diameter: 1 mm, crimp range: 0.25 mm<sup>2</sup> .. 1 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1243216

# ST-5ES1N8AW400S - Device connector front mounting



1607727


<https://www.phoenixcontact.com/us/products/1607727>

## ST-Z0019 - Color coding

1620621

<https://www.phoenixcontact.com/us/products/1620621>

Color coding, color: green



---

## ST-Z0020 - Color coding

1620622

<https://www.phoenixcontact.com/us/products/1620622>

Color coding, color: orange



# ST-5ES1N8AW400S - Device connector front mounting



1607727

<https://www.phoenixcontact.com/us/products/1607727>

## ST-Z0021 - Color coding

1620623

<https://www.phoenixcontact.com/us/products/1620623>

Color coding, color: black



---

## ST-Z0001 - Contact removal tool

1607770

<https://www.phoenixcontact.com/us/products/1607770>

Unlocking tool for contact carriers for snapping in the M17 device connectors



# ST-5ES1N8AW400S - Device connector front mounting



1607727

<https://www.phoenixcontact.com/us/products/1607727>

## ST-Z0014 - Metal protective cap

1616069

<https://www.phoenixcontact.com/us/products/1616069>



Metal protective cap, M17, degree of protection: IP67, series: ST, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1243010

---

## ST-Z0013 - Metal protective cap

1616068

<https://www.phoenixcontact.com/us/products/1616068>



Metal protective cap, M17, degree of protection: IP67, series: ST, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1243009

# ST-5ES1N8AW400S - Device connector front mounting



1607727

<https://www.phoenixcontact.com/us/products/1607727>

## PROT-M17PRO-OT-IP20 - Plastic protective cap

1055708

<https://www.phoenixcontact.com/us/products/1055708>

Plastic protective cap, M17, degree of protection: IP20, series: M17 PRO



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)