


## C-13.824-15-1010-SMD-TR-NS1

#### SPECIFICATIONS

PARAMETER	VALUE
NOMINAL FREQUENCY	13.824 MHz
MODE OF OSCILLATION	Fundamental
FREQUENCY TOLERANCE AT 25°C	±10 ppm max
FREQUENCY STABILITY OVER TEMPERATURE	±10 ppm max
OPERATING TEMPERATURE RANGE	-20°C to +70°C
STORAGE TEMPERATURE RANGE	-20°C to +70°C
AGING, MAXIMUM	±3 ppm first year max
LOAD CAPACITANCE	15 pF
EQUIVALENT SERIES RESISTANCE	25 $\Omega$ max $\Leftrightarrow$
MOTIONAL CAPACITANCE	8 fF ~ 12 fF
SHUNT CAPACITANCE	2.5 pF ± 1 pF
DRIVE LEVEL	100 μW max ←
REFLOW CONDITIONS	260°C for 10 sec max


## MECHANICAL SPECIFICATION

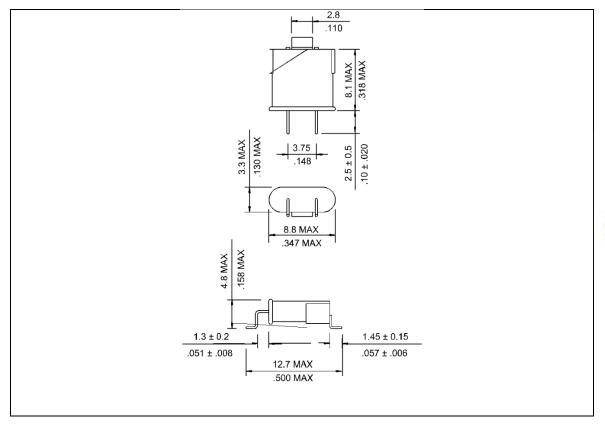





# C-13.824-15-1010-SMD-TR-NS1 REFLOW PROFILE

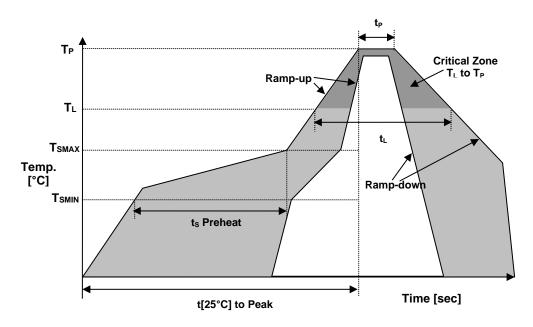

Reflow profile			
Temperature Min Preheat	T <sub>SMIN</sub>	150°C	
Temperature Max Preheat	T <sub>SMAX</sub>	200°C	
Time (T <sub>SMIN</sub> to T <sub>SMAX</sub> )	ts	60-180 sec.	
Temperature	T <sub>L</sub>	217°C	
Peak Temperature	T <sub>P</sub>	260°C	
Ramp-up rate	R <sub>UP</sub>	3°C/sec max.	
Ramp-down rate	R <sub>DOWN</sub>	6°C/sec max.	
Time within 5°C of Peak Temperature	t <sub>P</sub>	10 sec.	
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.	
Time	tı	60-150 sec.	

## ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS	Compliant
REACH SVHC	Compliant
HALOGEN-FREE	Compliant
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Sn





## C-13.824-15-1010-SMD-TR-NS1

#### MARKING

13.824 15pF Ryxxw

x – Internal Production ID code

y – Year code

w - Week code

YEAR CODE		
Year	Code	
2015	5	
2016	6	
2017	7	
2018	8	
2019	9	
2020	0	
2021	1	
2022	2	
2023	3	
2024	4	
2025	5	

	ALPHA WEEK CODE TABLE				
Week	Code	Week	Code	Week	Code
1	a	19	S	37	K
2	b	20	t	38	L
3	c	21	u	39	M
4	d	22	v	40	N
5	e	23	w	41	О
6	f	24	X	42	P
7	g	25	у	43	Q
8	h	26	Z	44	R
9	i	27	A	45	S
10	j	28	В	46	T
11	k	29	C	47	U
12	1	30	D	48	V
13	m	31	E	49	W
14	n	32	F	50	X
15	О	33	G	51	Y
16	р	34	Н	52	Z
17	q	35	I		
18	r	36	J		

#### APPROVAL

DRAWN BY:	KJackson, October 21, 2015
APPROVED BY:	KJackson, October 21, 2015
REVISION:	A, Initial Release
	B, Aging revised from ±2 ppm to ± 3 ppm KJ 10/26/15
	C, Updated to current spec levels KJ 9/10/20

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantiee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to one, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out or application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.