
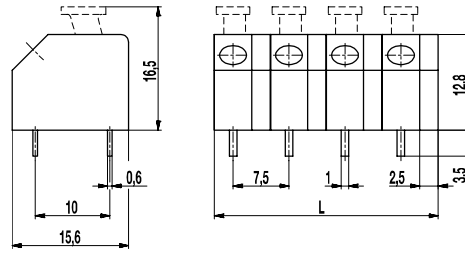


# 876(-DR)

PCB connector

Push-In connection diagonal 45° to PCB

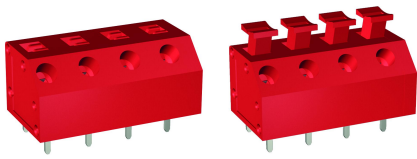

## GENERAL INFORMATION

Pitch	7,5 mm
No. of poles	2 - 10

## TECHNICAL DATA

Clamping Range	<i>solid / stranded / AWG</i>		
	0,14 - 2,5 mm <sup>2</sup> / 0,14 - 1,5 mm <sup>2</sup> / 26 - 16 AWG		
Rated Cross Section	1,5 mm <sup>2</sup>		
Wire Stripping Length	10 mm ± 0,5 mm		
Overvoltage Category	III	III	II
Pollution Severity Level	3	2	2
Rated Voltage	500 V	630 V	1000 V
Rated Impulse Voltage	6 kV	6 kV	6 kV
Rated Insulation Voltage	750 V acc. to EN 60998-1		
Rated Current	10 A		
Hole in PCB	ø 1,3 mm		

## APPROVALS

	Current [A]	Voltage [V]	Group	AWG	[Nm]
	10	300	B	22 - 16	
	10	300	B, D, E	22 - 16	

## MATERIAL

Moulding	PA, red V-0
Comparative Tracking Index	CTI ≥ 600
Insulating Group	I
Temperature Range	-40°C up to 100°C
Terminal body	Tin plated brass
Solder pin	0,6 x 1,0 mm; tin plated brass
Spring	Stainless strip steel

## OPTIONS / ACCESSORIES

- Consecutive numbering
- Special marking according to drawing
- Self-adhesive marking strip BST-7,50
- Other pitch
- Connected to larger number of poles

## CONFIGURATIONS

Poles	Part number	Article number	Part number	Article number	Length (L)	Packaging	PU
2	876/02	72.812.001	876-DR/02	82.812.001	15,00 mm	Box	200
3	876/03	73.812.001	876-DR/03	83.812.001	22,50 mm	Box	100
4	876/04	74.812.001	876-DR/04	84.812.001	30,00 mm	Box	100
5	876/05	75.812.001	876-DR/05	85.812.001	37,50 mm	Box	100
6	876/06	76.812.001	876-DR/06	86.812.001	45,00 mm	Box	50

