

## STRADA-2X2-T2-M

IESNA Type II (medium) beam with excellent backlight control, illuminance uniformity and cutoff

### SPECIFICATION:

Dimensions	50.0 x 50.0 mm
Height	11.9 mm
Fastening	glue, pin, screw
ROHS compliant	yes ⓘ




### MATERIALS:

Component	Type	Material	Colour	Finish
STRADA-2X2-T2-M	Multi-lens	PMMA	clear	

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C16504_STRADA-2X2-T2-M » Box size: 476 x 273 x 292 mm	800	160	160	10.2


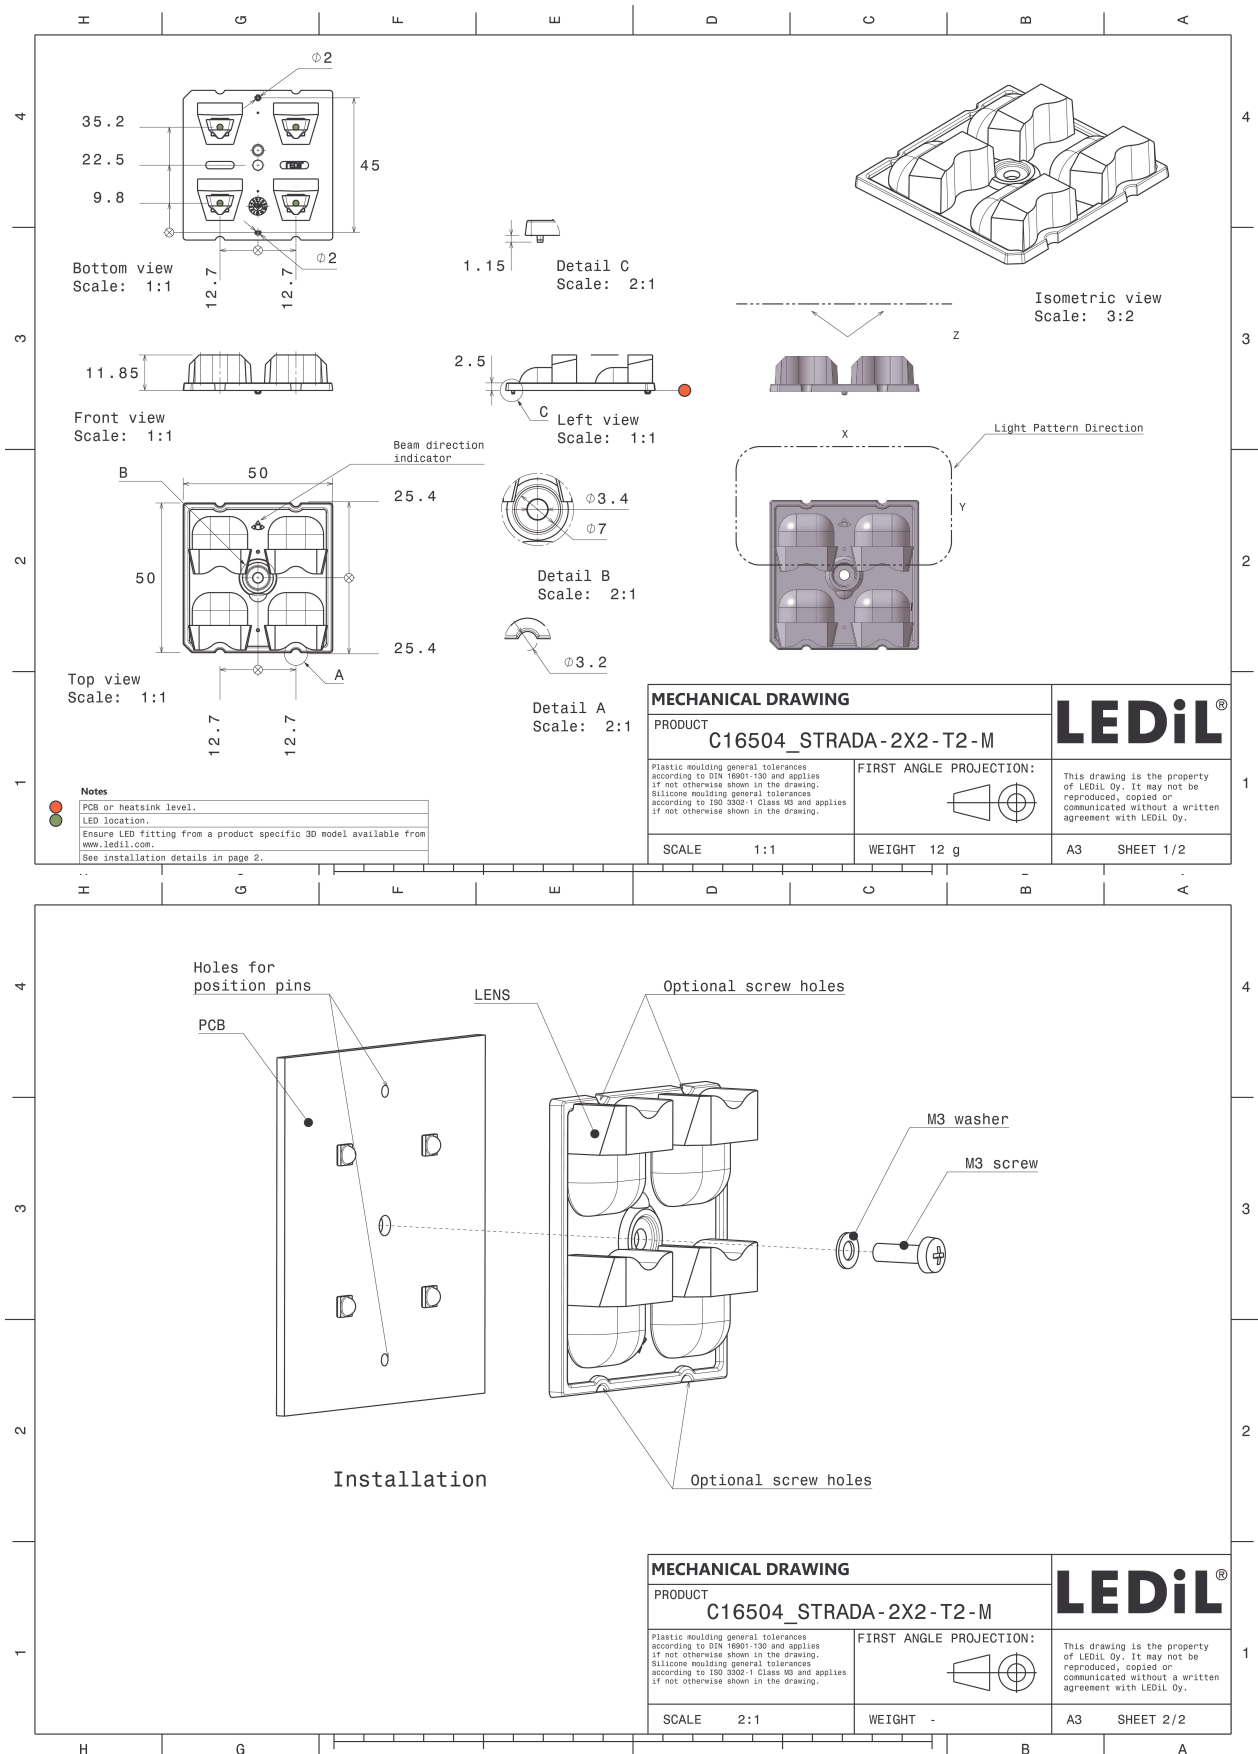


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)


#### OPTICAL RESULTS (MEASURED):




LED XM-L3  
FWHM / FWTM Asymmetric  
Efficiency 95 %  
Peak intensity 1.3 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

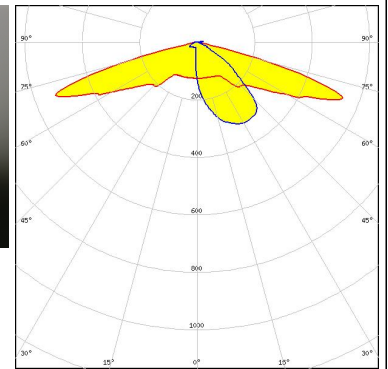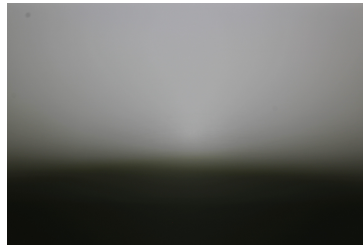


LED XP-G2  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

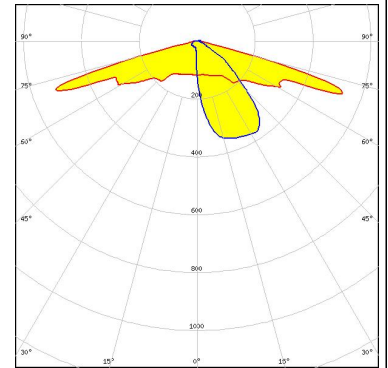

LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.5 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

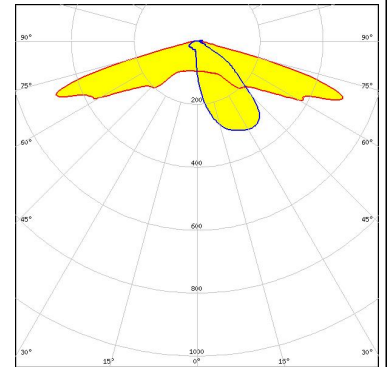


LED LUXEON TX  
FWHM / FWTM Asymmetric  
Efficiency %  
LEDs/each optic 1  
Light colour White  
Required components:

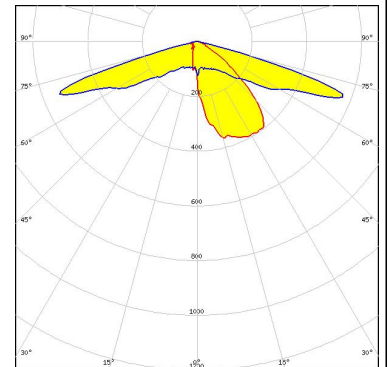


#### OPTICAL RESULTS (MEASURED):




LED LUXEON V2  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

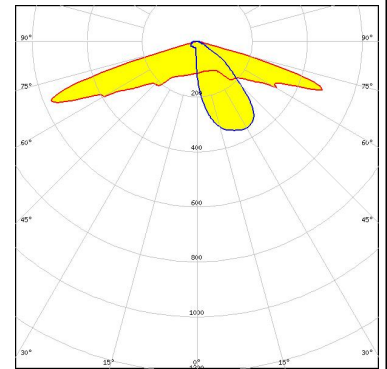


LED RecLED 122x50mm 1900lm 730 2x4 Opt G1  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 1.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

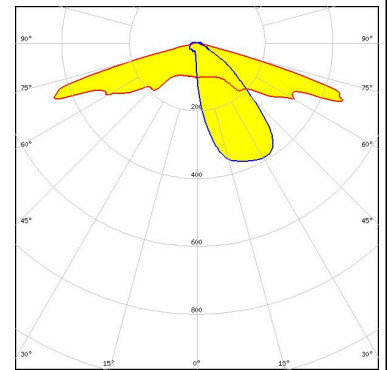

LED NVSW219F  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

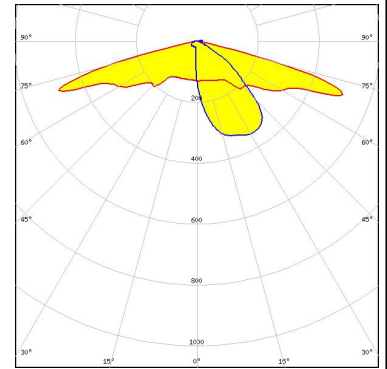

LED NVSW319B  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

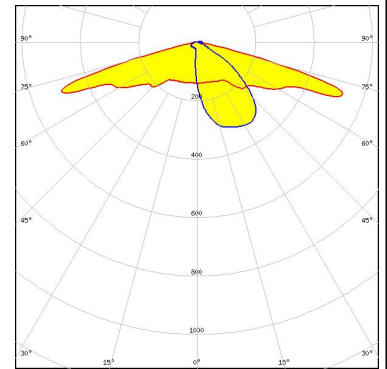




#### OPTICAL RESULTS (MEASURED):

##### OSRAM

Opto Semiconductors


LED Duris S8  
FWHM / FWTM Asymmetric  
Efficiency 95 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

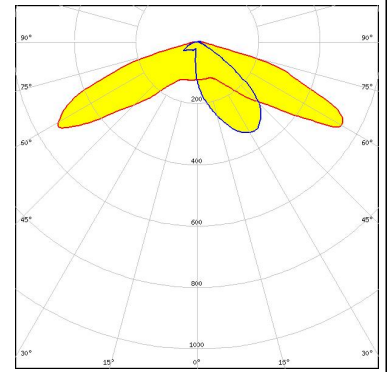

##### OSRAM


Opto Semiconductors

LED OSLOM Square PC  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

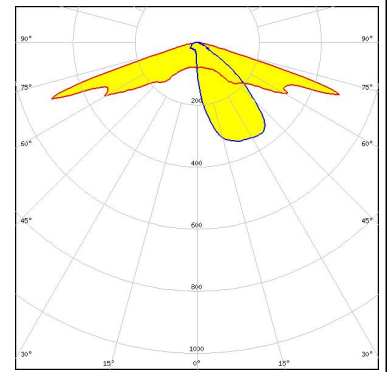


##### PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

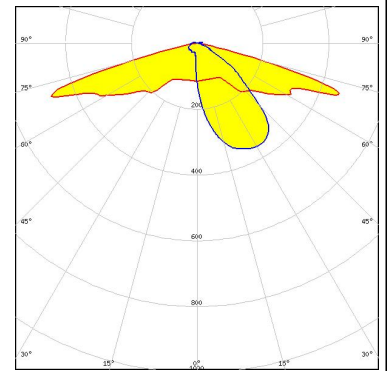

##### SAMSUNG


LED HiLOM RC12 Z (LH181B)  
FWHM / FWTM Asymmetric  
Efficiency 96 %  
Peak intensity 2.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

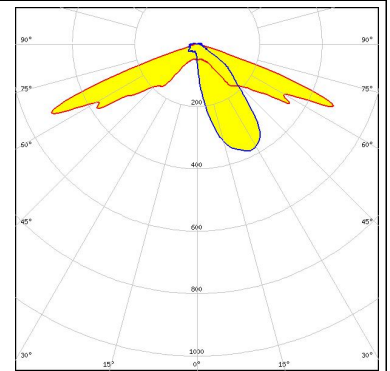

#### OPTICAL RESULTS (MEASURED):


#### SAMSUNG

LED HiLOM RH12 Z (LH351C)  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

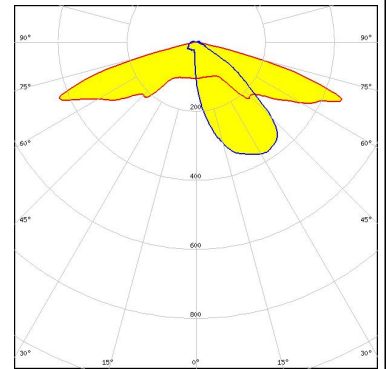


#### SAMSUNG

LED HiLOM RH16 (LH351C)  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

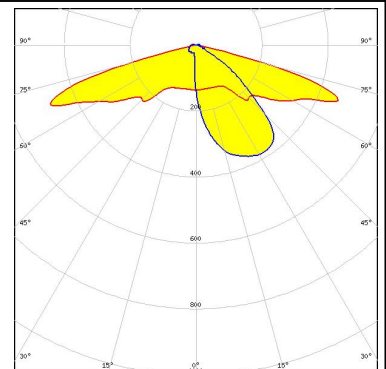

#### SAMSUNG

LED HiLOM RM12 Z (LH502C)  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

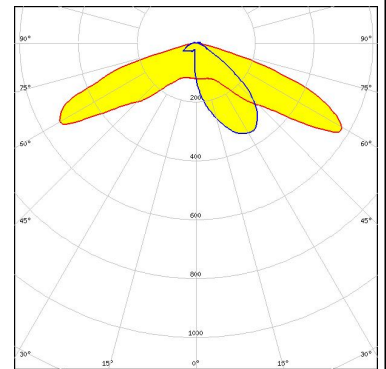


#### SAMSUNG

LED HiLOM RM16 Z (LH502C)  
 FWHM / FWTM Asymmetric  
 Efficiency 98 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


#### OPTICAL RESULTS (MEASURED):

#### SAMSUNG


LED HiLOM RM8 Z (LH502C)  
 FWHM / FWTM Asymmetric  
 Efficiency 97 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

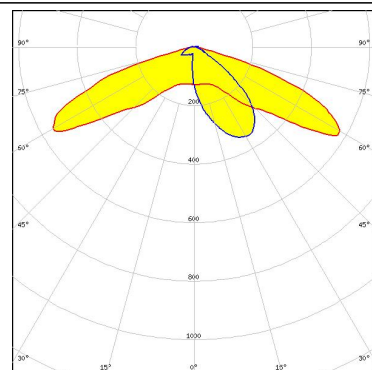

LED Z5M3  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

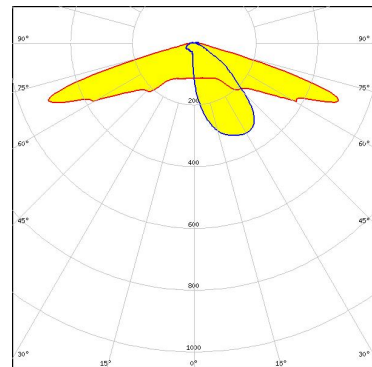

LED Z5M4  
 FWHM / FWTM Asymmetric  
 Efficiency 96 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

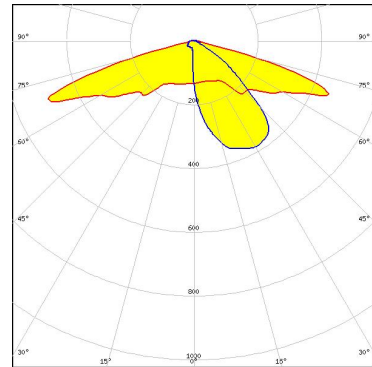


#### OPTICAL RESULTS (SIMULATED):




LED Bridgelux SMD 5050  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

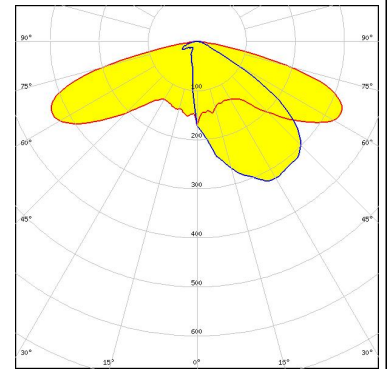


LED J Series 5050B 6V K Class  
 FWHM / FWTM Asymmetric  
 Efficiency 81 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

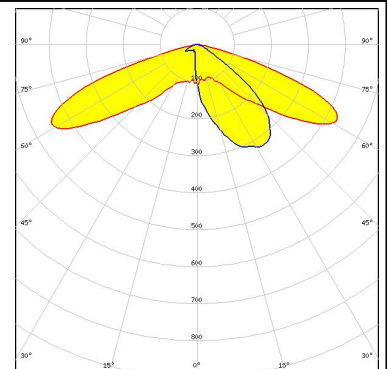

LED XHP35 HD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

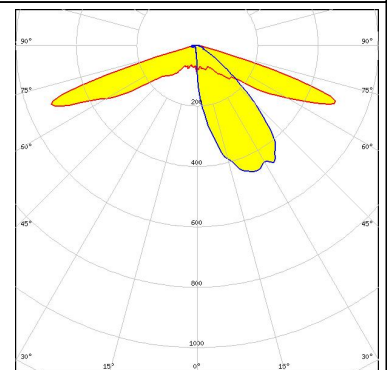

LED XM-L2  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

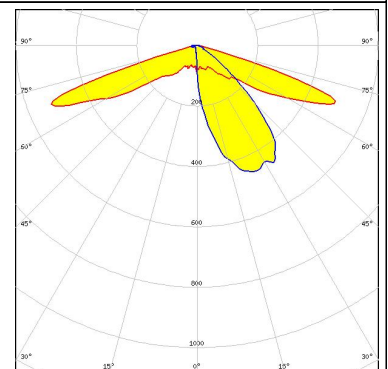


#### OPTICAL RESULTS (SIMULATED):




LED XP-G2  
FWHM / FWTM Asymmetric  
Efficiency 81 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

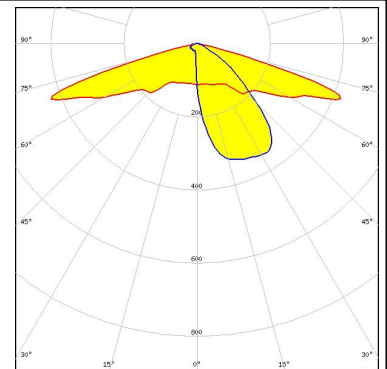


LED XP-G2 HE  
FWHM / FWTM Asymmetric  
Efficiency 90 %  
Peak intensity 1.2 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

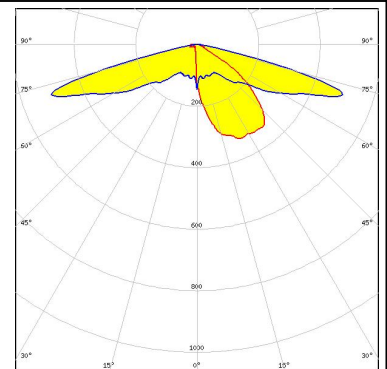


LED XP-G3  
FWHM / FWTM Asymmetric  
Efficiency 77 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

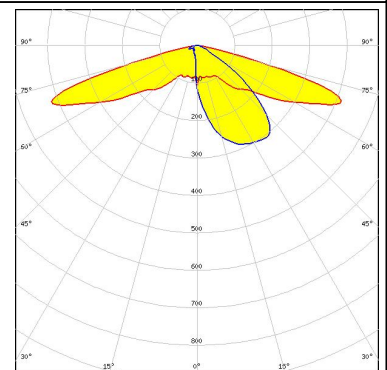

LED XP-G4  
FWHM / FWTM Asymmetric  
Efficiency 81 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:


Protective plate, glass

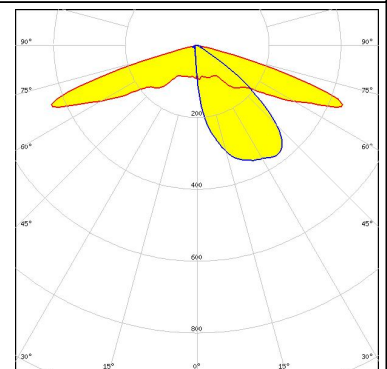

#### OPTICAL RESULTS (SIMULATED):




LED XP-G4  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.3 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

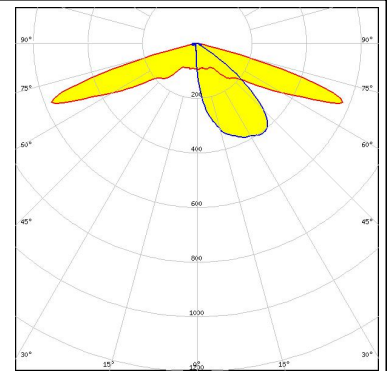


LED XP-L2  
FWHM / FWTM Asymmetric  
Efficiency 78 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

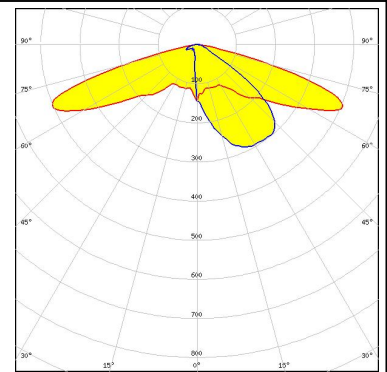


LED XP-L2  
FWHM / FWTM Asymmetric  
Efficiency 78 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

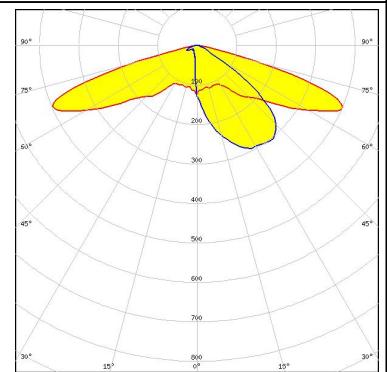


LED XP-L2  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

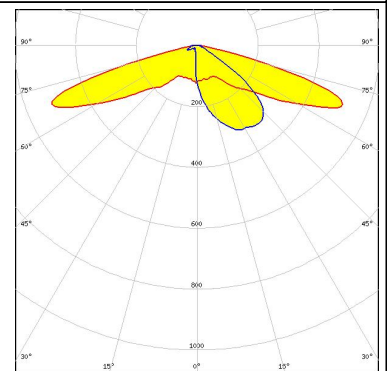


#### OPTICAL RESULTS (SIMULATED):




LED XT-E  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

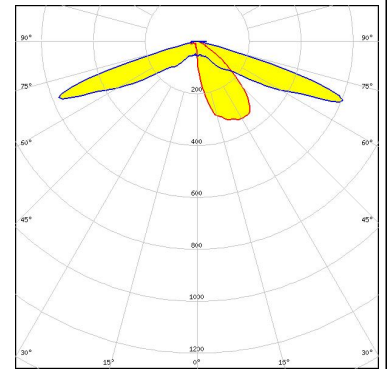

LED LUXEON 3030 2D (Round LES)  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

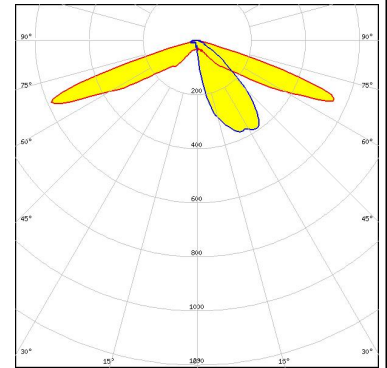


LED LUXEON 3030 2D (Square LES)  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

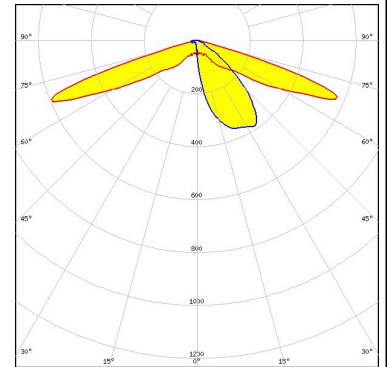

LED LUXEON 5050 HE  
 FWHM / FWTM Asymmetric  
 Efficiency 81 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

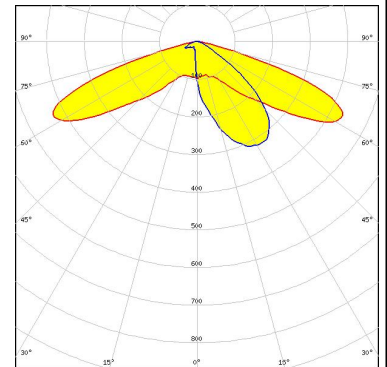




#### OPTICAL RESULTS (SIMULATED):

##### LUMILEDS


LED LUXEON 5050 Round LES  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

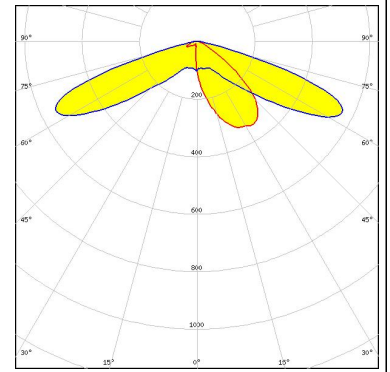

##### LUMILEDS

LED LUXEON 5050 Round LES  
 FWHM / FWTM Asymmetric  
 Efficiency 84 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

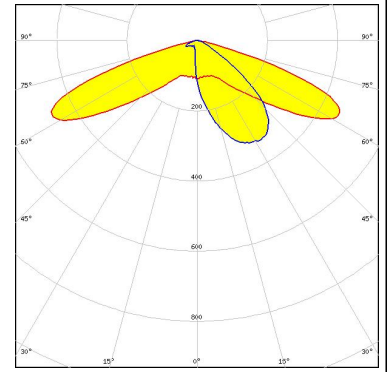

##### LUMILEDS


LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 81 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

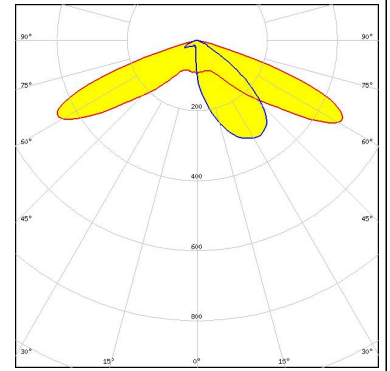

##### LUMILEDS

LED LUXEON 5050 Square LES  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

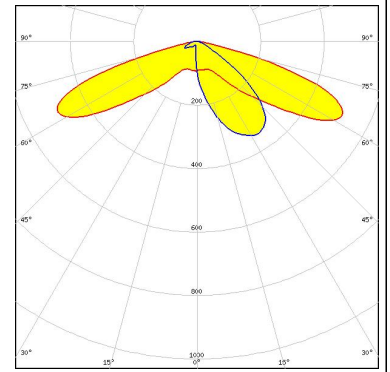


#### OPTICAL RESULTS (SIMULATED):

##### LUMILEDS

LED LUXEON HL2X  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:


Protective plate, glass

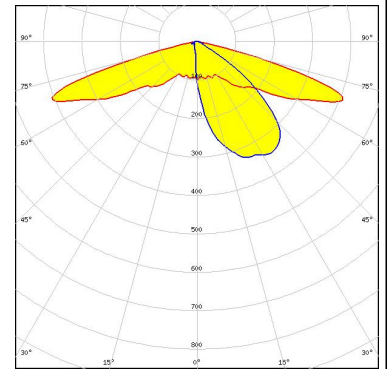

##### LUMILEDS


LED LUXEON TX  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 1.1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

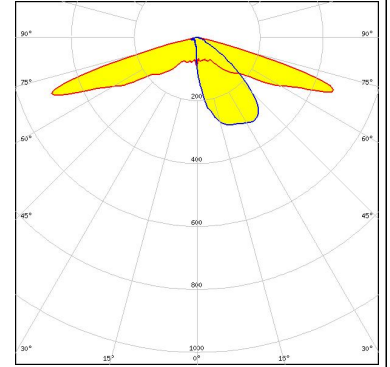

##### LUMILEDS


LED LUXEON V  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

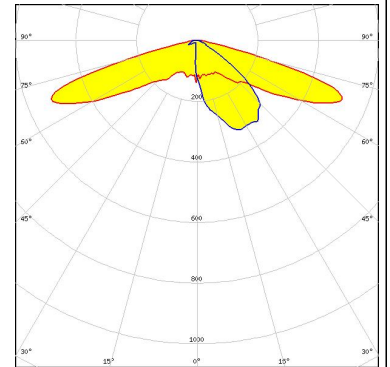

##### LUMILEDS

LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:


Protective plate, glass

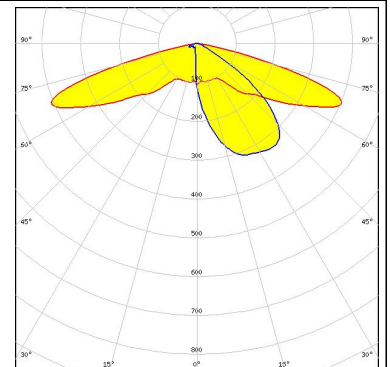

#### OPTICAL RESULTS (SIMULATED):




LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)  
 FWHM / FWTM Asymmetric  
 Efficiency 95 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

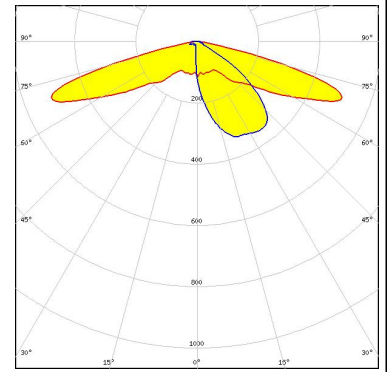


LED NF2x757G  
 FWHM / FWTM Asymmetric  
 Efficiency 81 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

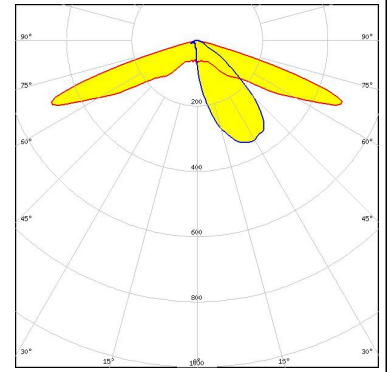


LED NV4WB35AM  
 FWHM / FWTM Asymmetric  
 Efficiency 95 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

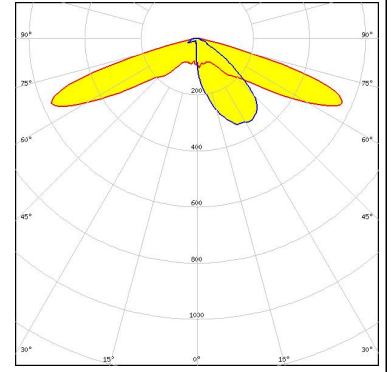

LED NVSW219F  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

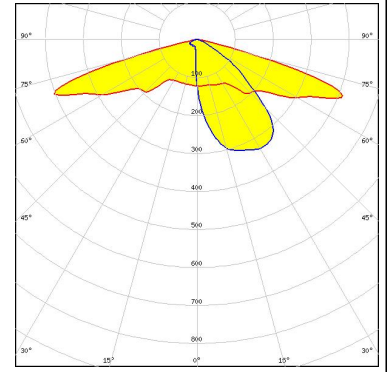

#### OPTICAL RESULTS (SIMULATED):




LED NVSW519A  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

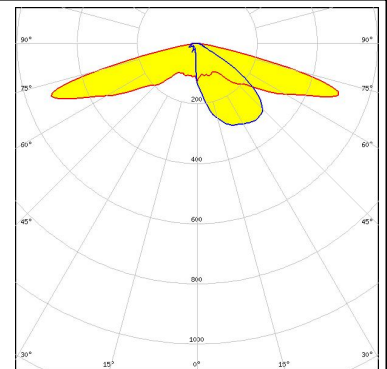


LED NVSW519A  
FWHM / FWTM Asymmetric  
Efficiency 82 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

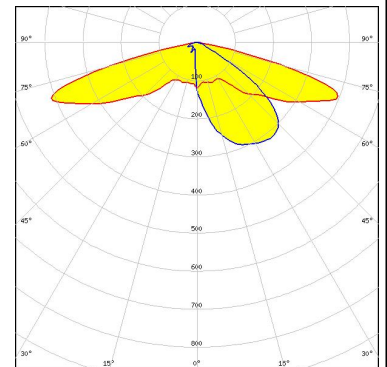


LED NVSxx19B/NVSxx19C  
FWHM / FWTM Asymmetric  
Efficiency %  
LEDs/each optic 1  
Light colour White  
Required components:

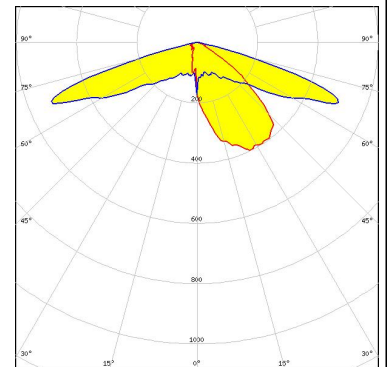

LED NVSxx19B/NVSxx19C  
FWHM / FWTM Asymmetric  
Efficiency 82 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

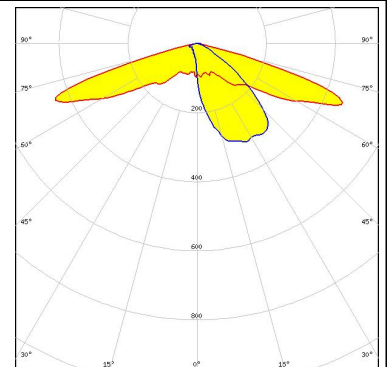


#### OPTICAL RESULTS (SIMULATED):

##### OSRAM

Opto Semiconductors

LED Duris S8  
FWHM / FWTM Asymmetric  
Efficiency 79 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:


Protective plate, glass

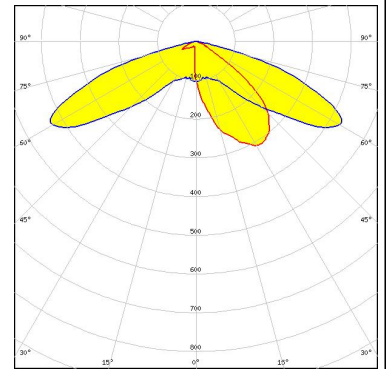

##### OSRAM

Opto Semiconductors


LED OSCONIQ C 2424  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 4  
Light colour White  
Required components:

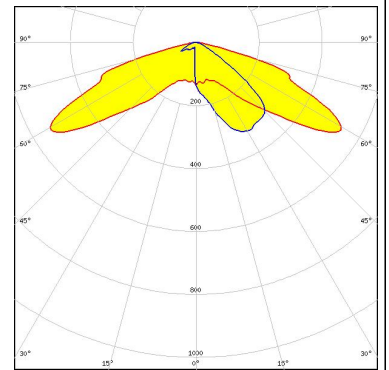

##### OSRAM

Opto Semiconductors

LED OSCONIQ P 3737 (2W version)  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.4 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

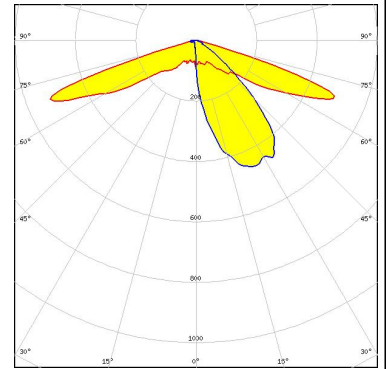


##### OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
FWHM / FWTM Asymmetric  
Efficiency 82 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

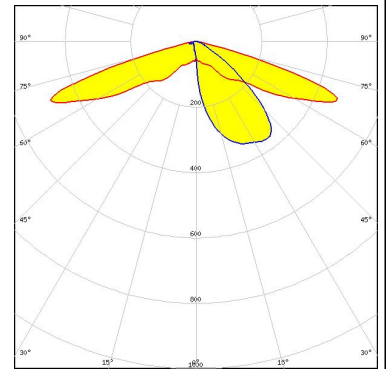


#### OPTICAL RESULTS (SIMULATED):

##### OSRAM

Opto Semiconductors


LED	OSLON Square CSSRM2/CSSRM3
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	1.4 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

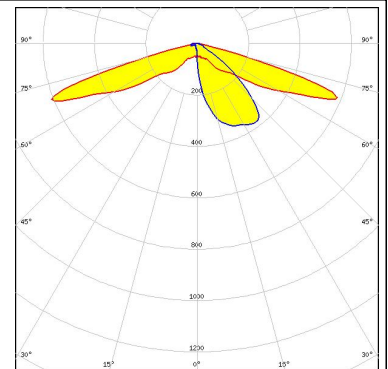

##### PHILIPS

LED	Fortimo FastFlex LED 2x8 DA G4
FWHM / FWTM	Asymmetric
Efficiency	80 %
Peak intensity	1.2 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	


Protective plate, glass

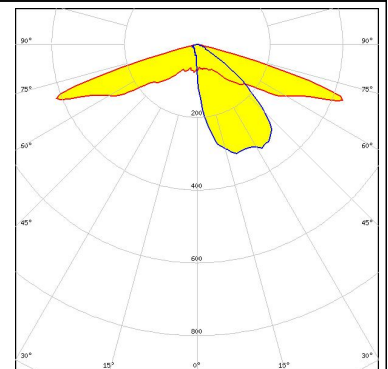

##### PHILIPS


LED	Fortimo FastFlex LED 2x8 DA G5
FWHM / FWTM	Asymmetric
Efficiency	79 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

Protective plate, glass

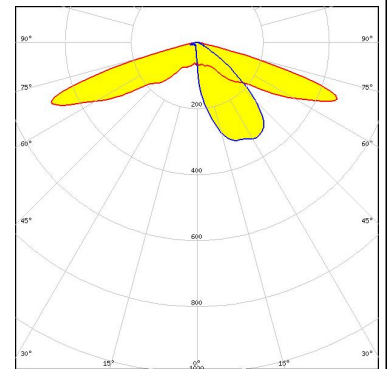

##### PHILIPS

LED	Fortimo FastFlex LED 2x8 DA G5
FWHM / FWTM	Asymmetric
Efficiency	93 %
Peak intensity	1.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

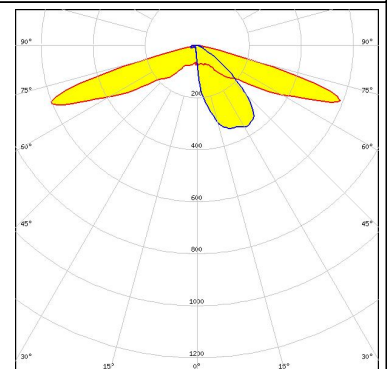




#### OPTICAL RESULTS (SIMULATED):

#### PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4  
 FWHM / FWTM Asymmetric  
 Efficiency 83 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

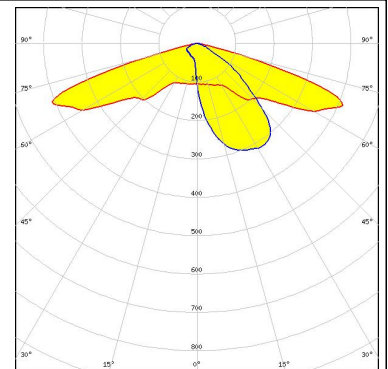

#### SAMSUNG

LED HiLOM RM8 Z (LH502C)  
 FWHM / FWTM Asymmetric  
 Efficiency 85 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

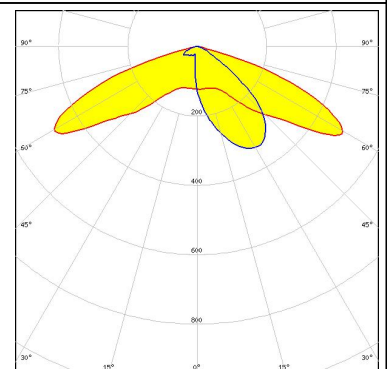

#### SAMSUNG

LED LH351B  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


Protective plate, glass

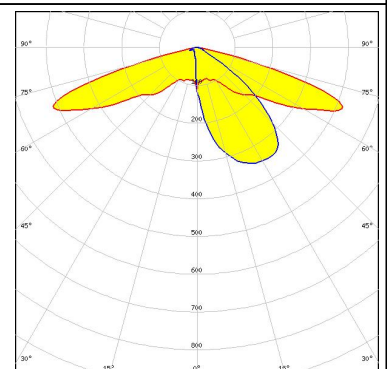

#### SAMSUNG

LED LH351C  
 FWHM / FWTM Asymmetric  
 Efficiency 88 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

Protective plate, glass

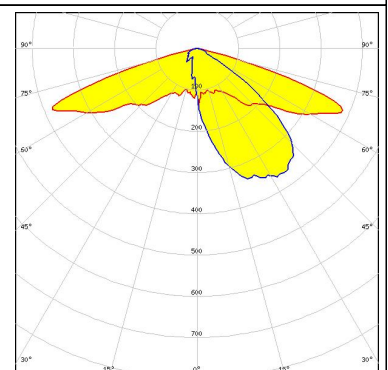




#### OPTICAL RESULTS (SIMULATED):

#### SAMSUNG


LED LH502D  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

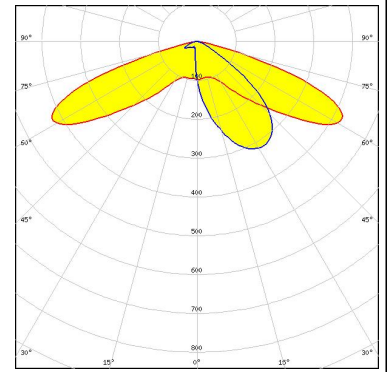


#### SAMSUNG

LED LH502D  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

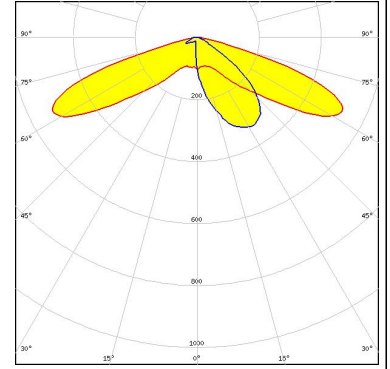


LED Z5M1/Z5M2  
FWHM / FWTM Asymmetric  
Efficiency %  
LEDs/each optic 1  
Light colour White  
Required components:

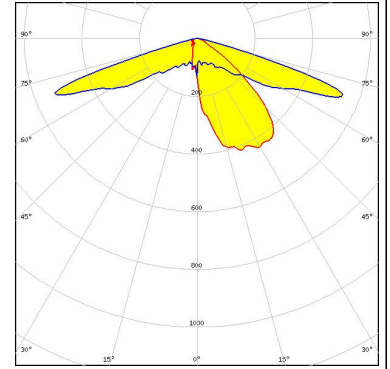

LED Z5M3  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 1 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

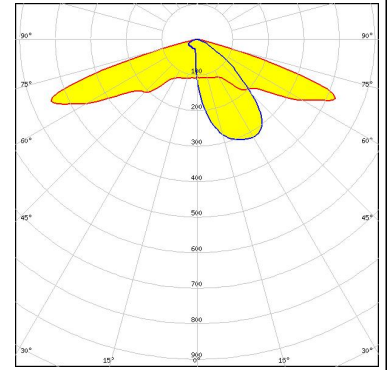


#### OPTICAL RESULTS (SIMULATED):




LED Z5M4  
FWHM / FWTM Asymmetric  
Efficiency 82 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

Protective plate, glass

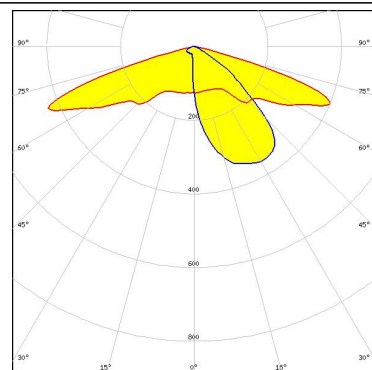

#### TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 1.6 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

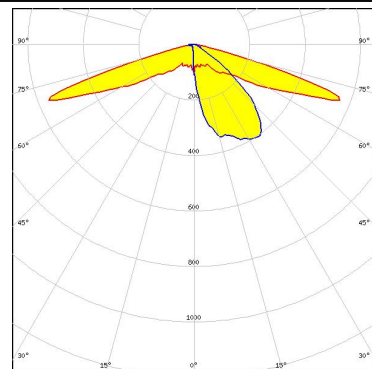

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)