

Product Features

1. High precision and high frequency stability
2. Extremely good for reducing EMI effect
3. Provide clean and stable reference clock to a wide variety of ICs
4. The best choice of Bluetooth , Wi-Fi and other short range wireless communication
5. RoHS and REACH Compliant , Pb-free , Halogen-free
6. Industry Standard Package :
2.0 x 1.6 x 0.5 mm (8Y Series)

Application :

- Wireless Communication
- CPE , Router , Ethernet Switch , Gateway , Set-Top Box
- Notebook , Tablet , Server , Cloud
- Industry



Test condition

Ambient temperature : $25 \pm 5^\circ\text{C}$


Relative humidity : 40% ~ 70%

● Table 1 . Electrical Specifications

Parameters	Symbol	Min.	Typ.	Max.	Units	Notes
Nominal Frequency	F	16 ~ 96			MHz	
Frequency Tolerance @ $25^\circ\text{C} \pm 3^\circ\text{C}$	FT	± 10			ppm	16~60MHz
		± 15				>60MHz
Frequency Stability Over Operating Temp. Range (Reference 25°C)	ST	± 20			ppm	@ $-40 \sim 85^\circ\text{C}$
		± 30				@ $-40 \sim 105^\circ\text{C}$
Operating Temperature	Topr	-40	25	105	$^\circ\text{C}$	
Load Capacitance	CL	6~20			pF	
Drive Level	DL	-	100	200	μW	
Equivalent Series Resistance	ESR	-	-	100	Ohm	16~20MHz
		-	-	80		20~60MHz
		-	-	30		60~96MHz
Aging	-	$\pm 3, \pm 5$			ppm	1st Year

Note : The table shows common spec. if you have special spec. requirement , please feel free to contact our salesperson.

● Dimensions

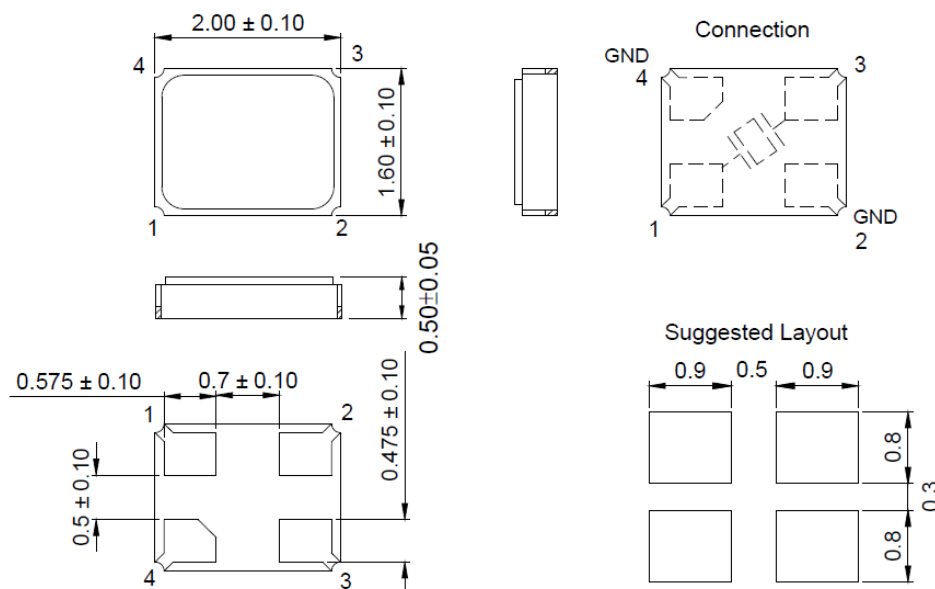

(Unit : mm)