



Three-terminal voltage regulator

BL79LXX

FEATURES

- Some kinds output voltage series
- Superior ripple rejection ratio for audio frequency
- Large maximum power dissipation: 800 mW
- Over current and over temperature protection

HF

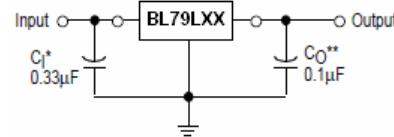

SOT-89

APPLICATIONS

- Three-terminal Negative Fixed Voltage Regulators

ORDERING INFORMATION

Type No.	Marking	Package Code
BL79LXX	79LXX	SOT-89

MAXIMUM RATING

operating temperature range applies unless otherwise specified

Symbol	Parameter	Value	Units
V_I	Input voltage	-35	V
P_D	Power dissipation NOTE1	800 NOTE2	mW
T_{opr}	Operating ambient temperature	0 to +150	°C
T_j, T_{stg}	Junction and Storage Temperature	-65 to +150	°C

Notes: 1. $T_a \leq 25^\circ\text{C}$, If $T_a > 25^\circ\text{C}$, derate by $6.4 \text{ mW}/^\circ\text{C}$

2. 15 mm * 25 mm *0.7 mm glass epoxy board, $T_a \leq 25^\circ\text{C}$

Three-terminal voltage regulator**BL79LXX****ELECTRICAL CHARACTERISTICS**(V_{IN}=-10V,I_O=40mA,0°C<T_j<125°C,C_{IN}=0.33μF,C_L=0.1μF,unless otherwise specified)

Parameter	Symbol	Test conditions	BL79L05			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C V _{IN} =-10V ,1.0 mA ≤ I _O ≤70mA	-4.8 -4.75	-5.0	-5.2 -5.25	V
Load regulation	ΔV _{OLOAD}	T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 100 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 40 mA		16 11 5.0	60 30	mV
Line regulation	ΔV _{OLINE}	T _j =25°C , -20V≤V _i ≤-7V T _j =25°C , -20V≤V _i ≤-8V		55 45	150 100	mV
Quiescent current	I _Q	T _j =25°C		-2.0	-4.0	mA
Quiescent current change	△I _Q	T _j =25°C , -20V≤V _i ≤-8V 1.0mA≤I _O ≤40mA			1.5 1.0	mA
Voltage drop	V _{DROP}	T _j =25°C		1.3		V
Output short circuit current	I _{OS}	T _j =25°C		300		mA

Three-terminal voltage regulator**BL79LXX****ELECTRICAL CHARACTERISTICS**(V_{IN}=-11 V, I_{OUT}= 40 mA, 0°C ≤ T_j ≤ 125°C, C_{IN}= 0.33μF, C_L= 0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	BL79L06			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C V _{IN} =-10V ,1.0 mA ≤ I _O ≤70mA	-5.76 -5.70	-6.0	-6.24 -6.30	V
Load regulation	ΔV _{OLOAD}	T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA		17.5 12 5.5	70	mV
Line regulation	ΔV _{OLINE}	T _j =25°C , -21V≤V _i ≤-8.1V T _j =25°C , -21V≤V _i ≤-9.0V		50 45	150 110	mV
Quiescent current	I _Q	T _j =25°C		-2.0	-4.0	mA
Quiescent current change	△I _Q	T _j =25°C , -21V≤V _i ≤-9.0V 1.0mA≤I _O ≤40mA			1.5 1.0	mA
Voltage drop	V _{DROP}	T _j =25°C		1.3	—	V
Output short circuit current	I _{OS}	T _j =25°C		300		mA

Three-terminal voltage regulator**BL79LXX****ELECTRICAL CHARACTERISTICS**(V_{IN}=-14 V, I_{OUT}= 40 mA, 0°C ≤ T_j ≤ 125°C, C_{IN}= 0.33μF, C_L= 0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	BL79L08			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C V _{IN} =-14V , 1.0 mA ≤ I _O ≤70mA	-7.68 -7.60	-8.0	-8.32 -8.40	V
Load regulation	ΔV _{OLOAD}	T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA		22 15 7.0	80 40	mV
Line regulation	ΔV _{OLINE}	T _j =25°C , -23V≤V _i ≤-10.5V T _j =25°C , -23V≤V _i ≤-11V		65 55	175 125	mV
Quiescent current	I _Q	T _j =25°C		-2.0	-4.0	mA
Quiescent current change	△I _Q	T _j =25°C, -23V≤V _i ≤-11V 1.0mA≤I _O ≤40mA			1.5 1.0	mA
Voltage drop	V _{DROP}	T _j =25°C		1.3		V
Output short circuit current	I _{OS}	T _j =25°C		270		mA

Three-terminal voltage regulator**BL79LXX****ELECTRICAL CHARACTERISTICS**(V_{IN}=-15 V, I_{OUT}= 40 mA, 0°C ≤ T_j ≤ 125°C, C_{IN}= 0.33μF, C_L= 0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	BL79L09			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C V _{IN} =-15V ,1.0 mA ≤ I _O ≤70mA	-8.64 -8.55	-9.0	-9.36 -9.45	V
Load regulation	ΔV _{OLOAD}	T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA		24.5 17 8.0	90 45	mV
Line regulation	ΔV _{OLINE}	T _j =25°C , -24V≤V _i ≤-11.4V T _j =25°C , -24V≤V _i ≤-12V		80 70	200 160	mV
Quiescent current	I _Q	T _j =25°C		-2.6	4.6	mA
Quiescent current change	△I _Q	T _j =25°C, -24V≤V _i ≤-12V 1.0mA≤I _O ≤40mA			1.5 1.0	mA
Voltage drop	V _{DROP}	T _j =25°C		1.3		V
Output short circuit current	I _{OS}	T _j =25°C		270		mA

Three-terminal voltage regulator**BL79LXX****ELECTRICAL CHARACTERISTICS**(V_{IN}=-16 V, I_{OUT}= 40 mA, 0°C ≤ T_j ≤ 125°C, C_{IN}= 0.33μF, C_L= 0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	BL79L10			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C V _{IN} =-16V ,1.0 mA ≤ I _O ≤70mA	-9.6 -9.50	-10	-10.4 -10.5	V
Load regulation	ΔV _{OLOAD}	T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA		26 18 8.5	90 45	mV
Line regulation	ΔV _{OLINE}	T _j =25°C , -25V≤V _i ≤-12.5V T _j =25°C , -25V≤V _i ≤-13V		80 70	230 170	mV
Quiescent current	I _Q	T _j =25°C		-2.6	-4.6	mA
Quiescent current change	△I _Q	T _j =25°C , -25V≤V _i ≤-13V 1.0mA≤I _O ≤40mA			1.5 1.0	mA
Voltage drop	V _{DROP}	T _j =25°C		1.3		V
Output short circuit current	I _{OS}	T _j =25°C		260		mA

Three-terminal voltage regulator**BL79LXX****ELECTRICAL CHARACTERISTICS**(V_{IN}=-19 V, I_{OUT}= 40 mA, 0°C ≤ T_j ≤ 125°C, C_{IN}= 0.33μF, C_L= 0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	BL79L12			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C V _{IN} =-19V ,1.0 mA ≤ I _O ≤70mA	-11.52 -11.40	-12	-12.48 -12.60	V
Load regulation	ΔV _{OLOAD}	T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 100 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 100 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 40 mA		28.5 20 10	100 50	mV
Line regulation	ΔV _{OLINE}	T _j =25°C , -27V≤V _i ≤-14.5V T _j =25°C , -27V≤V _i ≤-16V		120 100	250 200	mV
Quiescent current	I _Q	T _j =25°C		-2.6	-4.6	mA
Quiescent current change	△I _Q	T _j =25°C , -27V≤V _i ≤-16V 1.0mA≤I _O ≤40mA			1.5 1.0	mA
Voltage drop	V _{DROP}	T _j =25°C		1.3		V
Output short circuit current	I _{OS}	T _j =25°C		250		mA







Three-terminal voltage regulator**BL79LXX****ELECTRICAL CHARACTERISTICS**(V_{IN}=-23 V, I_{OUT}= 40 mA, 0°C ≤ T_j ≤ 125°C, C_{IN}= 0.33μF, C_L= 0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	BL79L15			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C V _{IN} =-23V ,1.0 mA ≤ I _O ≤70mA	-14.4 -14.25	-15	-15.6 -15.75	V
Load regulation	ΔV _{OLOAD}	T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA T _j =25°C , 1.0 mA ≤ I _{OUT} ≤ 150 mA		36 25 12	150	mV
Line regulation	ΔV _{OLINE}	T _j =25°C , -30V≤V _i ≤-17.5V T _j =25°C , -30V≤V _i ≤-20V		130 110	300 250	mV
Quiescent current	I _Q	T _j =25°C		-2.6	-4.6	mA
Quiescent current change	△I _Q	T _j =25°C , -30V≤V _i ≤-20V 1.0mA≤I _O ≤40mA			1.5 1.0	mA
Voltage drop	V _{DROP}	T _j =25°C		1.3		V
Output short circuit current	I _{OS}	T _j =25°C		240		mA

Three-terminal voltage regulator

BL79LXX

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

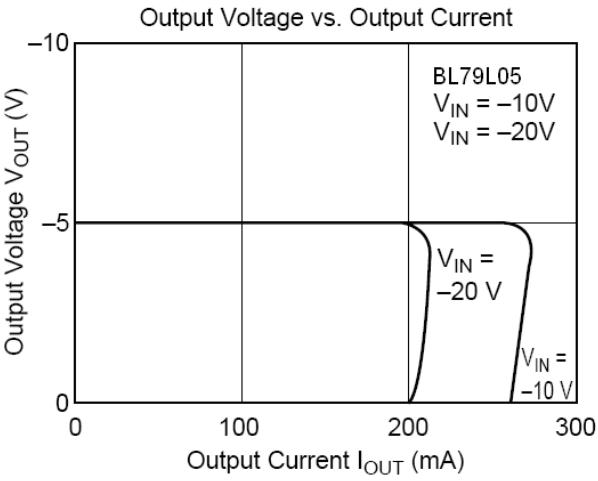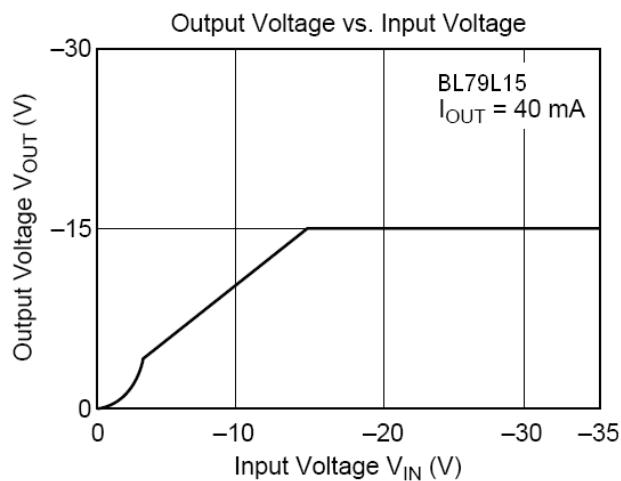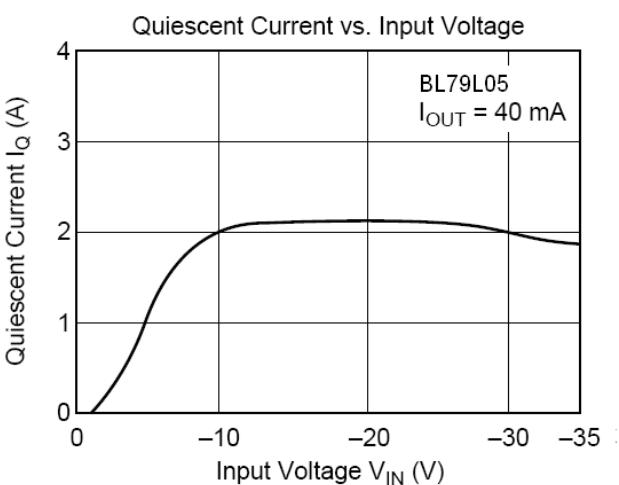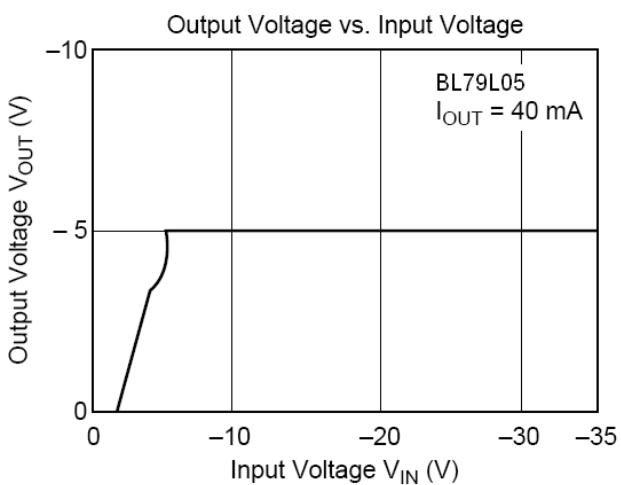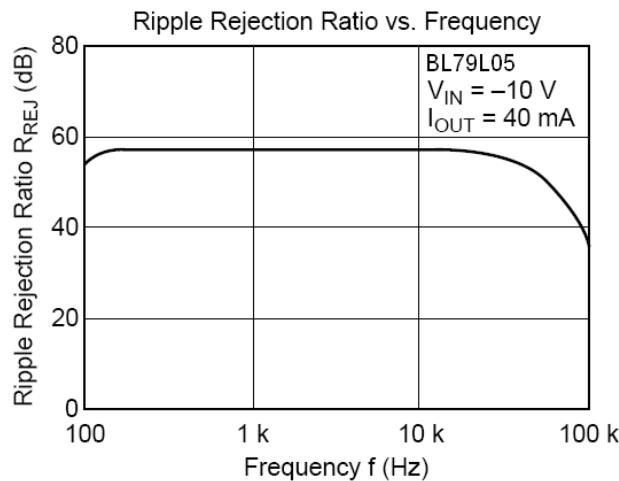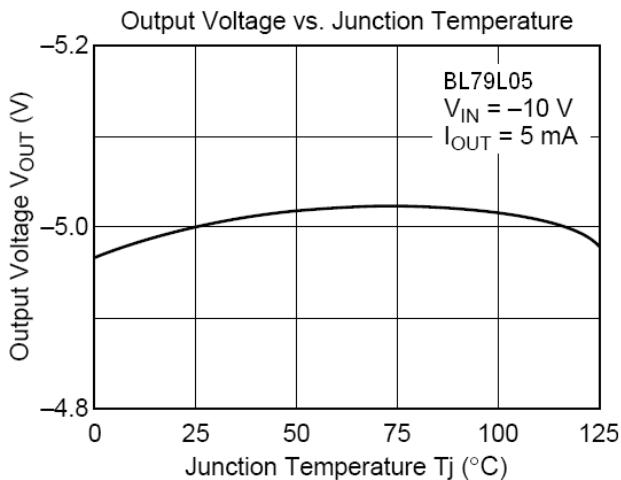

Three-terminal voltage regulator

BL79LXX

PACKAGE OUTLINE


Plastic surface mounted package

SOT-89

SOT-89		
Dim	Min	Max
A	4.30	4.70
B	2.25	2.65
C	1.30	1.70
D	0.30	0.50
E	1.40	1.60
F	0.38	0.58
H	1.60	1.80
J	0.30	0.50
L	0.90	1.10
K	3.95	4.35

All Dimensions in mm

SOLDERING FOOTPRINT

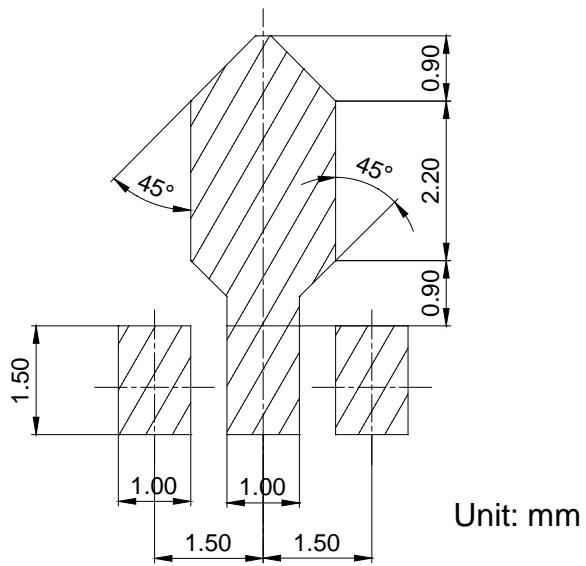

PACKAGE INFORMATION

Device	Package	Shipping
BL79LXX	SOT-89	1000 pcs / Tape & Reel