


# DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PCB connector, nominal cross section: 0.5 mm<sup>2</sup>, color: black, nominal current: 6 A, rated voltage (III/2): 160 V, contact surface: Gold, contact connection type: Socket, number of potentials: 20, number of rows: 2, number of positions: 10, number of connections: 20, product range: DFMC 0,5/...-ST-RF, pitch: 2.54 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, plug-in system: COMBICON DFMC 0,5, locking: Snap-in locking, mounting: Self-locking flange, type of packaging: packed in cardboard

## Your advantages

- Gold-plated contacts ensure transfer quality remains stable over the long term
- Time saving push-in connection, tools not required
- Defined contact force ensures that contact remains stable over the long term
- Intuitive operation due to color-coded actuating push button
- Optimized for tight installation situations: operation and conductor connection from one direction
- Intuitive locking mechanism prevents accidental disconnection

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 1715742                        |
| Packing unit                         | 50 pc                          |
| Minimum order quantity               | 50 pc                          |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | AA01                           |
| Product key                          | AAAFDB                         |
| GTIN                                 | 4055626446813                  |
| Weight per piece (including packing) | 5.67 g                         |
| Weight per piece (excluding packing) | 5.594 g                        |
| Customs tariff number                | 85366990                       |
| Country of origin                    | PL                             |

# DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

## Technical data

### Product properties

|                       |                        |
|-----------------------|------------------------|
| Product line          | COMBICON Connectors XS |
| Product type          | PCB connector          |
| Product family        | DFMC 0,5/...-ST-RF     |
| Number of positions   | 10                     |
| Pitch                 | 2.54 mm                |
| Number of connections | 20                     |
| Number of rows        | 2                      |
| Number of potentials  | 20                     |

### Electrical properties

|                             |        |
|-----------------------------|--------|
| Nominal current $I_N$       | 6 A    |
| Nominal voltage $U_N$       | 160 V  |
| Degree of pollution         | 3      |
| Contact resistance          | 2.7 mΩ |
| Rated voltage (III/3)       | 32 V   |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated voltage (III/2)       | 160 V  |
| Rated surge voltage (III/2) | 2.5 kV |
| Rated voltage (II/2)        | 160 V  |
| Rated surge voltage (II/2)  | 2.5 kV |

### Connection data

#### Connection technology

|                         |                     |
|-------------------------|---------------------|
| Type                    | Standard            |
| Connector system        | COMBICON DFMC 0,5   |
| Nominal cross section   | 0.5 mm <sup>2</sup> |
| Contact connection type | Socket              |

#### Interlock

|                 |                     |
|-----------------|---------------------|
| Locking type    | Snap-in locking     |
| Mounting flange | Self-locking flange |

#### Conductor connection

|                                                                       |                                               |
|-----------------------------------------------------------------------|-----------------------------------------------|
| Connection method                                                     | Push-in spring connection                     |
| Conductor/PCB connection direction                                    | 0 °                                           |
| Conductor cross section rigid                                         | 0.14 mm <sup>2</sup> ... 0.5 mm <sup>2</sup>  |
| Conductor cross section flexible                                      | 0.14 mm <sup>2</sup> ... 0.5 mm <sup>2</sup>  |
| Conductor cross section AWG                                           | 26 ... 20                                     |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm <sup>2</sup> ... 0.34 mm <sup>2</sup> |
| Conductor cross section, flexible, with ferrule, with plastic sleeve  | 0.14 mm <sup>2</sup> ... 0.25 mm <sup>2</sup> |

# DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

|                                    |            |
|------------------------------------|------------|
| Cylindrical gauge a x b / diameter | - / 1.2 mm |
| Stripping length                   | 7 mm       |

## Material specifications

### Material data - contact

|                                             |                                                                                  |
|---------------------------------------------|----------------------------------------------------------------------------------|
| Note                                        | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material                            | Cu alloy                                                                         |
| Surface characteristics                     | Selective coating                                                                |
| Metal surface terminal point (top layer)    | Tin (5 - 7 $\mu\text{m}$ Sn)                                                     |
| Metal surface terminal point (middle layer) | Nickel (1 - 3 $\mu\text{m}$ Ni)                                                  |
| Metal surface contact area (top layer)      | Gold (0.25 Au)                                                                   |
| Metal surface contact area (middle layer)   | Nickel (2 - 3 $\mu\text{m}$ Ni)                                                  |


### Material data - housing

|                                        |              |
|----------------------------------------|--------------|
| Color (Housing)                        | black (9005) |
| Insulating material                    | LCP          |
| Insulating material group              | IIIa         |
| CTI according to IEC 60112             | 175          |
| Flammability rating according to UL 94 | V0           |

### Material data – actuating element

|                                        |               |
|----------------------------------------|---------------|
| Color (Actuating element)              | orange (2003) |
| Insulating material                    | LCP           |
| Insulating material group              | IIIa          |
| CTI according to IEC 60112             | 175           |
| Flammability rating according to UL 94 | V0            |

## Dimensions

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Pitch               | 2.54 mm                                                                              |
| Width [w]           | 27.9 mm                                                                              |
| Height [h]          | 10.5 mm                                                                              |
| Length [l]          | 14.4 mm                                                                              |

## Mounting

|                   |                           |
|-------------------|---------------------------|
| Connection method | Push-in spring connection |
|-------------------|---------------------------|

## Mechanical tests

### Conductor connection

# DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

## Test for conductor damage and slackening

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

## Repeated connection and disconnection

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

## Pull-out test

|                                                                             |                                          |
|-----------------------------------------------------------------------------|------------------------------------------|
| Specification                                                               | IEC 60999-1:1999-11                      |
| Conductor cross section/conductor type/tractive force setpoint/actual value | 0.14 mm <sup>2</sup> / solid / > 10 N    |
|                                                                             | 0.14 mm <sup>2</sup> / flexible / > 10 N |
|                                                                             | 0.5 mm <sup>2</sup> / solid / > 20 N     |
|                                                                             | 0.5 mm <sup>2</sup> / flexible / > 20 N  |

## Insertion and withdrawal forces

|                                     |             |
|-------------------------------------|-------------|
| Result                              | Test passed |
| No. of cycles                       | 100         |
| Insertion strength per pos. approx. | 2 N         |
| Withdraw strength per pos. approx.  | 1 N         |

## Resistance of inscriptions

|               |                        |
|---------------|------------------------|
| Specification | IEC 60068-2-70:1995-12 |
| Result        | Test passed            |

## Polarization and coding

|               |                        |
|---------------|------------------------|
| Specification | IEC 60512-13-5:2006-02 |
| Result        | Test passed            |

## Visual inspection

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-1-1:2002-02 |
| Result        | Test passed           |

## Dimension check

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-1-2:2002-02 |
| Result        | Test passed           |

## Environmental and real-life conditions

### Vibration test

|               |                             |
|---------------|-----------------------------|
| Specification | IEC 60068-2-6:2007-12       |
| Frequency     | 10 - 500 - 10 Hz            |
| Sweep speed   | 1 octave/min                |
| Amplitude     | 0.35 mm (10 Hz ... 60.1 Hz) |
| Sweep speed   | 5g (60.1 Hz ... 500 Hz)     |

# DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

|                        |     |
|------------------------|-----|
| Test duration per axis | 2 h |
|------------------------|-----|

## Durability test

|                                              |                       |
|----------------------------------------------|-----------------------|
| Specification                                | IEC 60512-9-1:2010-03 |
| Impulse withstand voltage at sea level       | 2.95 kV               |
| Contact resistance R <sub>1</sub>            | 2.7 mΩ                |
| Contact resistance R <sub>2</sub>            | 2.9 mΩ                |
| Contact resistance R <sub>2</sub> 2nd level  | 3.1 mΩ                |
| Insertion/withdrawal cycles                  | 100                   |
| Insulation resistance, neighboring positions | > 5 MΩ                |

## Climatic test

|                                   |                                                                            |
|-----------------------------------|----------------------------------------------------------------------------|
| Specification                     | DIN 50018:2013-05                                                          |
| Corrosive stress                  | 1.0 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> /40 °C/3 cycles |
| Thermal stress                    | 100 °C/168 h                                                               |
| Power-frequency withstand voltage | 1.39 kV                                                                    |

## Ambient conditions

|                                         |                                                     |
|-----------------------------------------|-----------------------------------------------------|
| Ambient temperature (operation)         | -40 °C ... 100 °C (dependent on the derating curve) |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                    |
| Relative humidity (storage/transport)   | 30 % ... 70 %                                       |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                    |

## Electrical tests

### Thermal test | Test group C

|                            |                       |
|----------------------------|-----------------------|
| Specification              | IEC 60512-5-1:2002-02 |
| Tested number of positions | 16                    |

### Insulation resistance

|                                              |                       |
|----------------------------------------------|-----------------------|
| Specification                                | IEC 60512-3-1:2002-02 |
| Insulation resistance, neighboring positions | > 5 MΩ                |

### Temperature cycles

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

### Air clearances and creepage distances |

|                                                        |                     |
|--------------------------------------------------------|---------------------|
| Specification                                          | IEC 60664-1:2007-04 |
| Insulating material group                              | IIIa                |
| Comparative tracking index (IEC 60112)                 | CTI 175             |
| Rated insulation voltage (III/3)                       | 32 V                |
| Rated surge voltage (III/3)                            | 2.5 kV              |
| minimum clearance value - non-homogenous field (III/3) | 1.5 mm              |
| minimum creepage distance (III/3)                      | 1.3 mm              |
| Rated insulation voltage (III/2)                       | 160 V               |
| Rated surge voltage (III/2)                            | 2.5 kV              |

# DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

|                                                        |        |
|--------------------------------------------------------|--------|
| minimum clearance value - non-homogenous field (III/2) | 1.5 mm |
| minimum creepage distance (III/2)                      | 1.6 mm |
| Rated insulation voltage (II/2)                        | 160 V  |
| Rated surge voltage (II/2)                             | 2.5 kV |
| minimum clearance value - non-homogenous field (II/2)  | 1.5 mm |
| minimum creepage distance (II/2)                       | 1.6 mm |

## Packaging specifications

|                   |                     |
|-------------------|---------------------|
| Type of packaging | packed in cardboard |
|-------------------|---------------------|


DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

Drawings

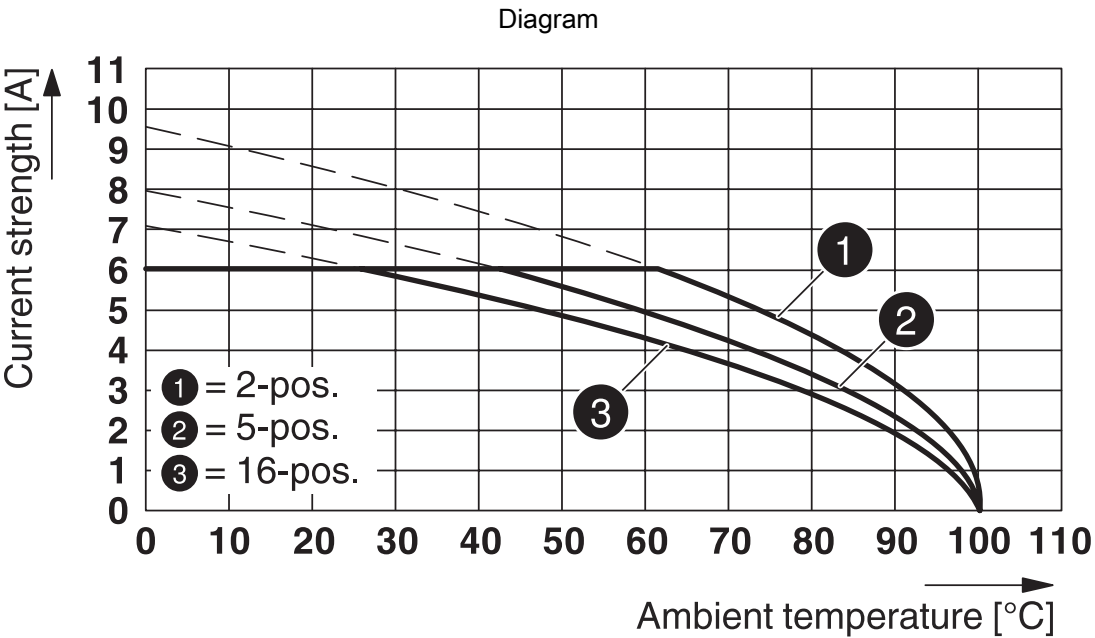

Type: DFMC 0,5/...-ST-2,54-RF with DMC 1,5/...-G1-2,54 P...THR R...

# DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1715742>

|                                                                                                                                                       |                       |                       |                   |                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
| <div> <b>cULus Recognized</b><br/>Approval ID: E60425-19920306</div> |                       |                       |                   |                             |
|                                                                                                                                                       | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                                                                                                                                           |                       |                       |                   |                             |
| Field wiring                                                                                                                                          | 150 V                 | 5 A                   | 26 - 20           | -                           |
| Factory wiring                                                                                                                                        | 150 V                 | 6 A                   | 26 - 20           | -                           |
| Use group C                                                                                                                                           |                       |                       |                   |                             |
| Factory wiring                                                                                                                                        | 50 V                  | 6 A                   | 26 - 20           | -                           |

|                                                                                                                                                                       |                       |                       |                   |                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
| <div> <b>VDE Gutachten mit Fertigungsüberwachung</b><br/>Approval ID: 40042389</div> |                       |                       |                   |                             |
|                                                                                                                                                                       | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                                                                                                       | 160 V                 | 6 A                   | -                 | 0.14 - 0.5                  |



# DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27460202 |
| ECLASS-12.0 | 27460202 |
| ECLASS-13.0 | 27460202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002638 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

## Environmental product compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

## Accessories

### SZS 0,4X2,0 - Screwdriver

1205202

<https://www.phoenixcontact.com/us/products/1205202>




Micro screwdriver, bladed, size: 0.4 x 2.0 x 60 mm, 2-component grip, with non-slip grip and twist cap

---

### SK 2,54/2,8:FORTL.ZAHLEN - Marker card

0804853

<https://www.phoenixcontact.com/us/products/0804853>



Marker card, white, labeled, horizontal: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 99, mounting type: adhesive, for terminal block width: 2.54 mm, lettering field size: 2.54 x 2.8 mm

# DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

## A 0,25- 7 - Ferrule

3202478

<https://www.phoenixcontact.com/us/products/3202478>



Ferrule, color: silver

---

## A 0,34- 7 - Ferrule

3009202

<https://www.phoenixcontact.com/us/products/3009202>



Ferrule, color: silver

# DFMC 0,5/10-ST-2,54-RF - PCB connector



1715742

<https://www.phoenixcontact.com/us/products/1715742>

## CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/us/products/1212034>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6.0 mm<sup>2</sup>, lateral entry, trapezoidal crimp

## DMC 0,5/10-G1-2,54 P20THR R44 - PCB header

1844808

<https://www.phoenixcontact.com/us/products/1844808>



PCB headers, nominal cross section: 0.5 mm<sup>2</sup>, color: black, nominal current: 6 A, rated voltage (III/2): 160 V, contact surface: Gold, contact connection type: Pin, number of potentials: 20, number of rows: 2, number of positions: 10, number of connections: 20, product range: DMC 0,5/-G1-THR, pitch: 2.54 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2 mm, number of solder pins per potential: 1, plug-in system: COMBICON DFMC 0,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: 44 mm wide tape, Sample values available under SAMPLE DMC...

# DFMC 0,5/10-ST-2,54-RF - PCB connector




1715742

<https://www.phoenixcontact.com/us/products/1715742>

## DMCV 0,5/10-G1-2,54 P20THR R44 - PCB header

1844950

<https://www.phoenixcontact.com/us/products/1844950>



PCB headers, nominal cross section: 0.5 mm<sup>2</sup>, color: black, nominal current: 6 A, rated voltage (III/2): 160 V, contact surface: Gold, contact connection type: Pin, number of potentials: 20, number of rows: 2, number of positions: 10, number of connections: 20, product range: DMCV 0,5/...-G1-THR, pitch: 2.54 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2 mm, number of solder pins per potential: 1, plug-in system: COMBICON DFMC 0,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: 44 mm wide tape, Sample values available under SAMPLE DMC...

---

## DMC 0,5/10-G1-2,54 SMD R44 - PCB header

1845108

<https://www.phoenixcontact.com/us/products/1845108>



PCB headers, nominal cross section: 0.5 mm<sup>2</sup>, color: black, nominal current: 6 A, rated voltage (III/2): 160 V, contact surface: Gold, contact connection type: Pin, number of potentials: 20, number of rows: 2, number of positions: 10, number of connections: 20, product range: DMC 0,5/...-G1-SMD, pitch: 2.54 mm, mounting: SMD soldering, pin layout: Linear pinning, solder pin [P]: 2 mm, number of solder pins per potential: 1, plug-in system: COMBICON DFMC 0,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: 44 mm wide tape, Sample values available under SAMPLE DMC...

# DFMC 0,5/10-ST-2,54-RF - PCB connector




1715742

<https://www.phoenixcontact.com/us/products/1715742>

## DMCV 0,5/10-G1-2,54 SMD R44 - PCB header

1845250

<https://www.phoenixcontact.com/us/products/1845250>



PCB headers, nominal cross section: 0.5 mm<sup>2</sup>, color: black, nominal current: 6 A, rated voltage (III/2): 160 V, contact surface: Gold, contact connection type: Pin, number of potentials: 20, number of rows: 2, number of positions: 10, number of connections: 20, product range: DMCV 0,5/...-G1-SMD, pitch: 2.54 mm, mounting: SMD soldering, pin layout: Linear pinning, number of solder pins per potential: 1, plug-in system: COMBICON DFMC 0,5, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: 44 mm wide tape, Sample values available under SAMPLE DMC...

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)