


# LPC 16 HC/ 2-STL2-10,16 - PCB connector



1716824  
<https://www.phoenixcontact.com/pc/products/1716824>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PCB connector, nominal cross section: 16 mm<sup>2</sup>, color: green, nominal current: 76 A, rated voltage (III/2): 1000 V, contact surface: Tin, contact connection type: Socket, number of rows: 1, number of positions: 2, product range: LPC 16 HC/..-STL, pitch: 10.16 mm, connection method: Lever Push-in connection, conductor/PCB connection direction: 0 °, locking clip: - without locking clip, plug-in system: COMBICON PC 16 advanced, locking: Snap-in locking, mounting: Self-locking flange, type of packaging: packed in cardboard

## Your advantages

- Tool-free lever principle enables time-saving connection and release of conductors with/without ferrules
- Clear lever positions provide reliable feedback on opened or closed clamping spaces
- Increased touch protection in accordance with IEC/UL 61800-5-1
- Time-saving push-in connection when lever is closed
- Intuitive locking mechanism prevents accidental disconnection
- Defined contact force ensures that contact remains stable over the long term

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1716824       |
| Packing unit                         | 25 pc         |
| Minimum order quantity               | 25 pc         |
| Product key                          | AAEBAE        |
| GTIN                                 | 4055626677293 |
| Weight per piece (including packing) | 49.936 g      |
| Weight per piece (excluding packing) | 49.2 g        |
| Customs tariff number                | 85366990      |
| Country of origin                    | PL            |

# LPC 16 HC/ 2-STL2-10,16 - PCB connector



1716824

<https://www.phoenixcontact.com/pc/products/1716824>

## Technical data

### Product properties

|                     |                        |
|---------------------|------------------------|
| Product line        | COMBICON Connectors XL |
| Product type        | PCB connector          |
| Product family      | LPC 16 HC/..-STL       |
| Number of positions | 2                      |
| Pitch               | 10.16 mm               |
| Number of rows      | 1                      |
| Mounting flange     | Self-locking flange    |

### Electrical properties

|                             |          |
|-----------------------------|----------|
| Nominal current $I_N$       | 76 A     |
| Nominal voltage $U_N$       | 1000 V   |
| Degree of pollution         | 3        |
| Contact resistance          | 0.235 mΩ |
| Rated voltage (III/3)       | 1000 V   |
| Rated surge voltage (III/3) | 8 kV     |
| Rated voltage (III/2)       | 1000 V   |
| Rated surge voltage (III/2) | 8 kV     |
| Rated voltage (II/2)        | 1000 V   |
| Rated surge voltage (II/2)  | 6 kV     |

### Connection data

#### Connection technology

|                         |                         |
|-------------------------|-------------------------|
| Connector system        | COMBICON PC 16 advanced |
| Nominal cross section   | 16 mm <sup>2</sup>      |
| Contact connection type | Socket                  |

#### Interlock

|                 |                     |
|-----------------|---------------------|
| Locking type    | Snap-in locking     |
| Mounting flange | Self-locking flange |

#### Conductor connection

|                                                                       |                                             |
|-----------------------------------------------------------------------|---------------------------------------------|
| Connection method                                                     | Lever Push-in connection                    |
| Conductor/PCB connection direction                                    | 0 °                                         |
| Conductor cross section rigid                                         | 0.75 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Conductor cross section flexible                                      | 0.75 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Conductor cross section AWG                                           | 18 ... 4                                    |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.75 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Conductor cross section, flexible, with ferrule, with plastic sleeve  | 0.75 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Cylindrical gauge a x b / diameter                                    | - / 5.4 mm                                  |
| Stripping length                                                      | 18 mm                                       |

# LPC 16 HC/ 2-STL2-10,16 - PCB connector



1716824

<https://www.phoenixcontact.com/pc/products/1716824>

## Material specifications

### Material data - contact

|                                          |                                                                                  |
|------------------------------------------|----------------------------------------------------------------------------------|
| Note                                     | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material                         | Cu alloy                                                                         |
| Surface characteristics                  | hot-dip tin-plated                                                               |
| Metal surface terminal point (top layer) | Tin (10 - 16 µm Sn)                                                              |
| Metal surface contact area (top layer)   | Tin (10 - 16 µm Sn)                                                              |


### Material data - housing

|                                        |              |
|----------------------------------------|--------------|
| Color (Housing)                        | green (6021) |
| Insulating material                    | PA           |
| Insulating material group              | I            |
| CTI according to IEC 60112             | 600          |
| Flammability rating according to UL 94 | V0           |

### Material data – actuating element

|                                        |               |
|----------------------------------------|---------------|
| Color (Actuating element)              | orange (2003) |
| Insulating material                    | PA GF         |
| Insulating material group              | I             |
| CTI according to IEC 60112             | 600           |
| Flammability rating according to UL 94 | V0            |

## Dimensions

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Pitch               | 10.16 mm                                                                             |
| Width [w]           | 33.68 mm                                                                             |
| Height [h]          | 32.2 mm                                                                              |
| Length [l]          | 56.3 mm                                                                              |

## Notes

|                    |                                                                                                                                                                                          |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes on operation | In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load. |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Mechanical tests

### Conductor connection

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

# LPC 16 HC/ 2-STL2-10,16 - PCB connector



1716824

<https://www.phoenixcontact.com/pc/products/1716824>

## Test for conductor damage and slackening

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

## Repeated connection and disconnection

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

## Pull-out test

|                                                                             |                                          |
|-----------------------------------------------------------------------------|------------------------------------------|
| Specification                                                               | IEC 60999-1:1999-11                      |
| Conductor cross section/conductor type/tractive force setpoint/actual value | 0.75 mm <sup>2</sup> / solid / > 30 N    |
|                                                                             | 0.75 mm <sup>2</sup> / flexible / > 30 N |
|                                                                             | 16 mm <sup>2</sup> / solid / > 100 N     |
|                                                                             | 16 mm <sup>2</sup> / flexible / > 100 N  |

## Insertion and withdrawal forces

|                                     |             |
|-------------------------------------|-------------|
| Result                              | Test passed |
| No. of cycles                       | 25          |
| Insertion strength per pos. approx. | 8 N         |
| Withdraw strength per pos. approx.  | 6 N         |

## Resistance of inscriptions

|               |                        |
|---------------|------------------------|
| Specification | IEC 60068-2-70:1995-12 |
| Result        | Test passed            |

## Polarization and coding

|               |                        |
|---------------|------------------------|
| Specification | IEC 60512-13-5:2006-02 |
| Result        | Test passed            |

## Visual inspection

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-1-1:2002-02 |
| Result        | Test passed           |

## Dimension check

|               |                       |
|---------------|-----------------------|
| Specification | IEC 60512-1-2:2002-02 |
| Result        | Test passed           |

## Environmental and real-life conditions

### Vibration test

|                        |                                          |
|------------------------|------------------------------------------|
| Specification          | IEC 60068-2-6:2007-12                    |
| Frequency              | 10 - 150 - 10 Hz                         |
| Sweep speed            | 1 octave/min                             |
| Amplitude              | 0.15 mm (10 Hz ... 60.1 Hz)              |
| Sweep speed            | 20 m/s <sup>2</sup> (60.1 Hz ... 150 Hz) |
| Test duration per axis | 2.5 h                                    |

### Durability test

# LPC 16 HC/ 2-STL2-10,16 - PCB connector



1716824

<https://www.phoenixcontact.com/pc/products/1716824>

|                                              |                       |
|----------------------------------------------|-----------------------|
| Specification                                | IEC 60512-9-1:2010-03 |
| Impulse withstand voltage at sea level       | 9.8 kV                |
| Contact resistance R <sub>1</sub>            | 0.235 mΩ              |
| Contact resistance R <sub>2</sub>            | 0.212 mΩ              |
| Insertion/withdrawal cycles                  | 25                    |
| Insulation resistance, neighboring positions | > 5 MΩ                |

## Climatic test

|                                   |                                                                           |
|-----------------------------------|---------------------------------------------------------------------------|
| Specification                     | ISO 6988:1985-02                                                          |
| Corrosive stress                  | 0.2 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> /40 °C/1 cycle |
| Thermal stress                    | 105 °C/168 h                                                              |
| Power-frequency withstand voltage | 4.26 kV                                                                   |

## Ambient conditions

|                                         |                                                     |
|-----------------------------------------|-----------------------------------------------------|
| Ambient temperature (operation)         | -40 °C ... 105 °C (dependent on the derating curve) |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                    |
| Relative humidity (storage/transport)   | 30 % ... 70 %                                       |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                    |

## Electrical tests

### Thermal test | Test group C

|                            |                       |
|----------------------------|-----------------------|
| Specification              | IEC 60512-5-1:2002-02 |
| Tested number of positions | 6                     |

### Insulation resistance

|                                              |                       |
|----------------------------------------------|-----------------------|
| Specification                                | IEC 60512-3-1:2002-02 |
| Insulation resistance, neighboring positions | > 5 MΩ                |

### Temperature cycles

|               |                     |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result        | Test passed         |

### Air clearances and creepage distances | 1. Insulation coordination

|                                                        |                   |
|--------------------------------------------------------|-------------------|
| Specification                                          | IEC 61984:2008-10 |
| Insulating material group                              | I                 |
| Comparative tracking index (IEC 60112)                 | CTI 600           |
| Rated insulation voltage (III/3)                       | 1000 V            |
| Rated surge voltage (III/3)                            | 8 kV              |
| minimum clearance value - non-homogenous field (III/3) | 8 mm              |
| minimum creepage distance (III/3)                      | 12.5 mm           |
| Rated insulation voltage (III/2)                       | 1000 V            |
| Rated surge voltage (III/2)                            | 8 kV              |
| minimum clearance value - non-homogenous field (III/2) | 8 mm              |
| minimum creepage distance (III/2)                      | 8 mm              |
| Rated insulation voltage (II/2)                        | 1000 V            |
| Rated surge voltage (II/2)                             | 6 kV              |

# LPC 16 HC/ 2-STL2-10,16 - PCB connector



1716824

<https://www.phoenixcontact.com/pc/products/1716824>

|                                                       |        |
|-------------------------------------------------------|--------|
| minimum clearance value - non-homogenous field (II/2) | 5.5 mm |
| minimum creepage distance (II/2)                      | 5.5 mm |

## Air clearances and creepage distances | 2. Insulation coordination

|                                                        |                     |
|--------------------------------------------------------|---------------------|
| Specification                                          | IEC 60664-1:2020-05 |
| Insulating material group                              | I                   |
| Comparative tracking index (IEC 60112)                 | CTI 600             |
| Rated insulation voltage (III/3)                       | 1000 V AC/DC        |
| Rated surge voltage (III/3)                            | 8 kV                |
| minimum clearance value - non-homogenous field (III/3) | 8 mm                |
| minimum creepage distance (III/3)                      | 12.5 mm             |
| Rated insulation voltage (III/2)                       | 1500 V DC           |
| Rated surge voltage (III/2)                            | 10 kV               |
| minimum clearance value - non-homogenous field (III/2) | 11 mm               |
| minimum creepage distance (III/2)                      | 11 mm               |
| Rated insulation voltage (II/2)                        | 1500 V DC           |
| Rated surge voltage (II/2)                             | 8 kV                |
| minimum clearance value - non-homogenous field (II/2)  | 8 mm                |
| minimum creepage distance (II/2)                       | 8 mm                |

## Packaging specifications

|                   |                     |
|-------------------|---------------------|
| Type of packaging | packed in cardboard |
|-------------------|---------------------|

# LPC 16 HC/ 2-STL2-10,16 - PCB connector




1716824

<https://www.phoenixcontact.com/pc/products/1716824>

## Drawings

Diagram

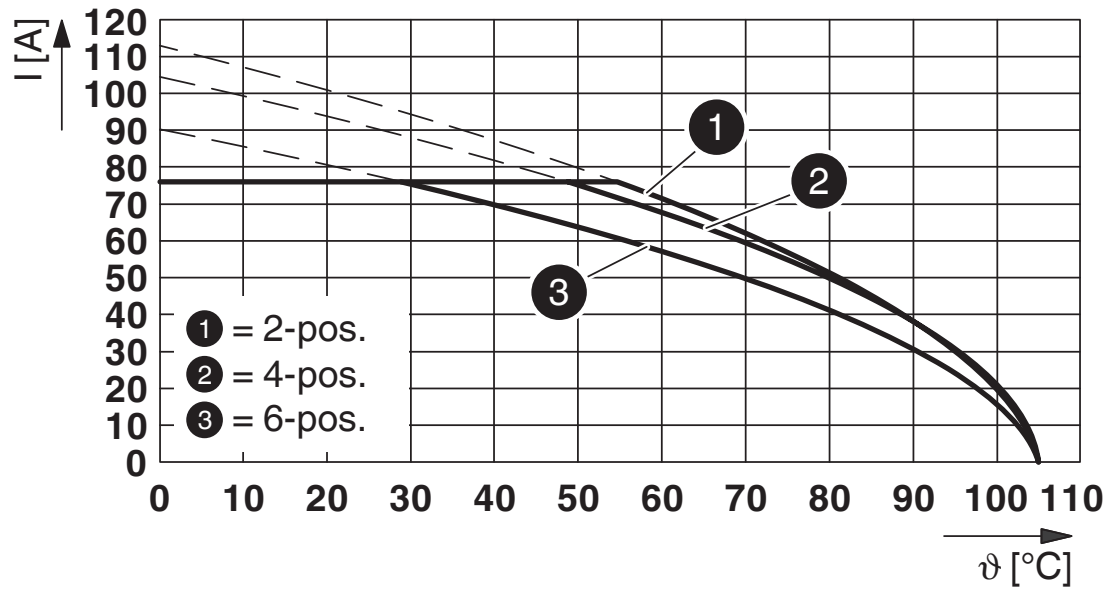

Type: LPC 16 HC/...-ST(L...)-10,16 with PC 16 HC/...-G(L...)-10,16

# LPC 16 HC/ 2-STL2-10,16 - PCB connector



1716824

<https://www.phoenixcontact.com/pc/products/1716824>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27460202 |
| ECLASS-12.0 | 27460202 |
| ECLASS-13.0 | 27460202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002638 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# LPC 16 HC/ 2-STL2-10,16 - PCB connector



1716824

<https://www.phoenixcontact.com/pc/products/1716824>

## Accessories

### CP-PC RD - Coding profile

1701967

<https://www.phoenixcontact.com/pc/products/1701967>


Coding profile, for plugging into the coding ribs of the plug at a later date, insulating material, color: Red



### PC 16 HC/ 2-GL2-10,16 - PCB header

1716857

<https://www.phoenixcontact.com/pc/products/1716857>



PCB headers, nominal cross section: 16 mm<sup>2</sup>, color: green, nominal current: 76 A, rated voltage (III/2): 1000 V, contact surface: Tin, contact connection type: Pin, number of rows: 1, number of positions: 2, product range: PC 16 HC/...-GL2, pitch: 10.16 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 4 mm, number of solder pins per potential: 4, plug-in system: COMBICON PC 16 advanced, Pin connector pattern alignment: Standard, locking: Snap-in locking, mounting: Self-locking flange, type of packaging: packed in cardboard

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)