1-929103-1 ACTIVE

AMP | Timer Connector System

TE Internal #: 1-929103-1

Housing for Male Terminals, Wire-to-Wire, 2 Position, .138 in [3.5 mm] Centerline, Black, Wire & Cable, Signal, Timer Connector

System
View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > Timer Connector Housing











Connector System: Wire-to-Wire

Number of Positions: 2

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 3.5 mm [.138 in]

Sealable: No

All Timer Connector Housing (525)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Male Terminals
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	2
Number of Rows	1
Electrical Characteristics	

12 VDC

Operating Voltage



Nominal Voltage Architecture	12 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Contact Features	
Contact Size	1.6mm
Contact Type	Tab
Contact Current Rating (Max)	7.5 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT GF
Centerline (Pitch)	3.5 mm[.138 in]
Dimensions	
Connector Height	30.5 mm[1.201 in]
Product Width	6.4 mm[.252 in]
Product Length	11.65 mm[.459 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C[158 °F][167 °F] [176 °F][185 °F]
Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94HB
Other	
Serviceable	No
Connector Position Assurance Capable	No



Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

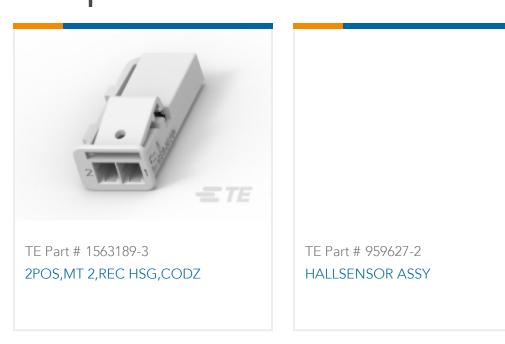


Also in the Series | Timer Connector System





Automotive Connector Caps & Covers (10)



Automotive Connector Locks & Position Assurance(14)



Automotive Housings(210)



Automotive Terminals(137)



Connector Seals & Cavity Plugs(31)




Crimp Terminal Housings(13)



Insertion & Extraction Tools(18)



Other Automotive Connector Accessories(1)



PCB Headers & Receptacles(77)



Quick Disconnects(4)

Customers Also Bought











Documents

Housing for Male Terminals, Wire-to-Wire, 2 Position, .138 in [3.5 mm] Centerline, Black, Wire & Cable, Signal, Timer Connector System



Product Drawings

1,6MM FLA-STE-GEH2P

German

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_1-929103-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_1-929103-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_1-929103-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Timer Interconnection System

English