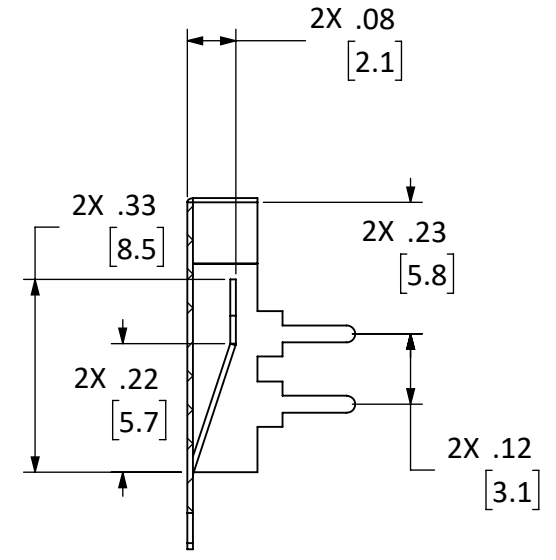
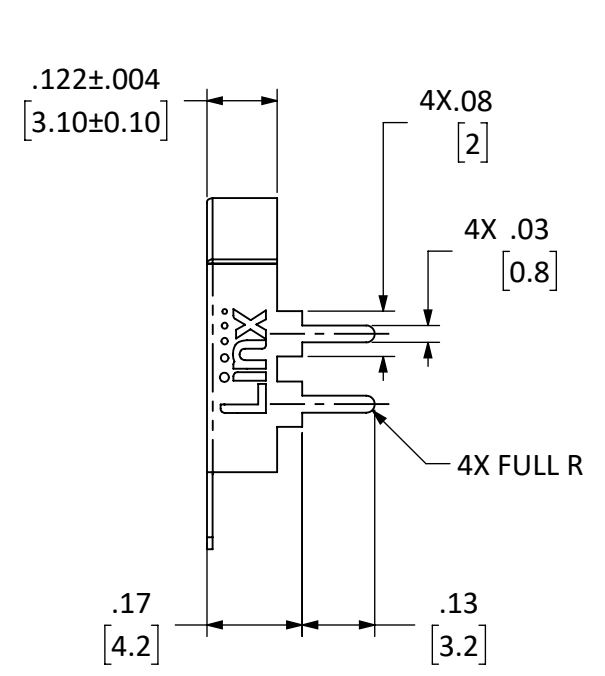
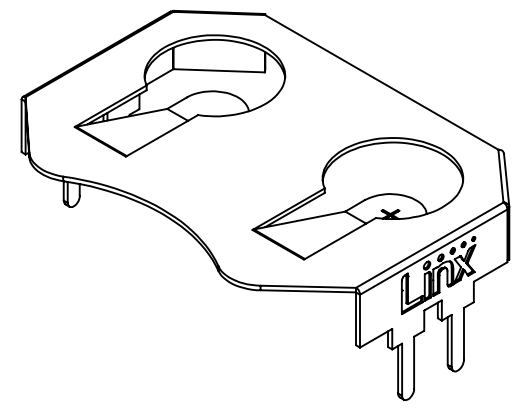
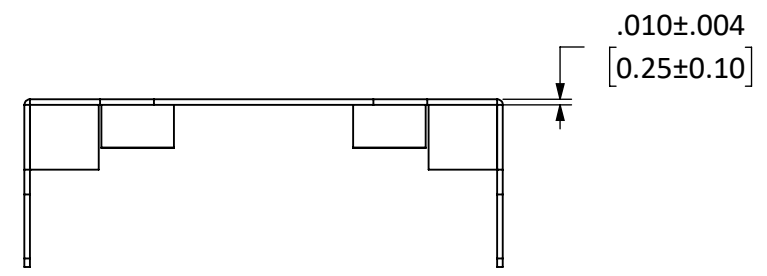
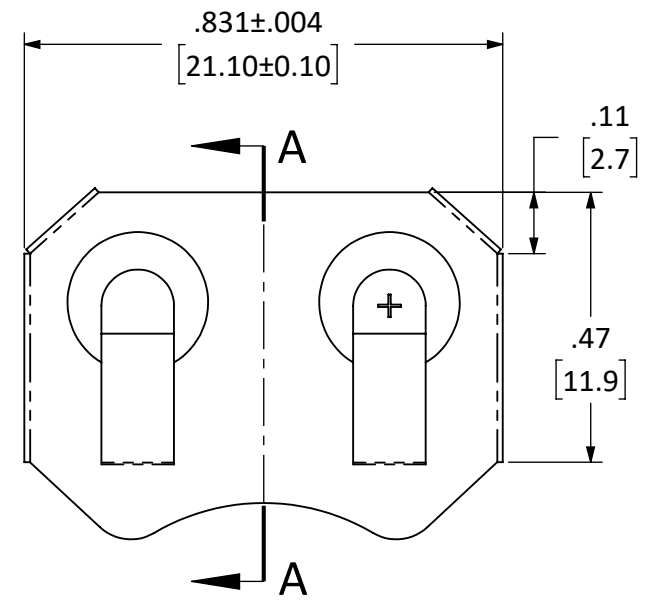
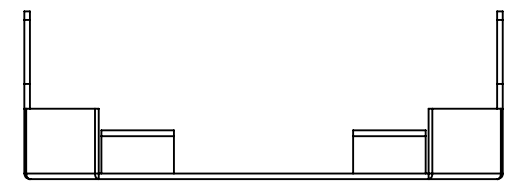




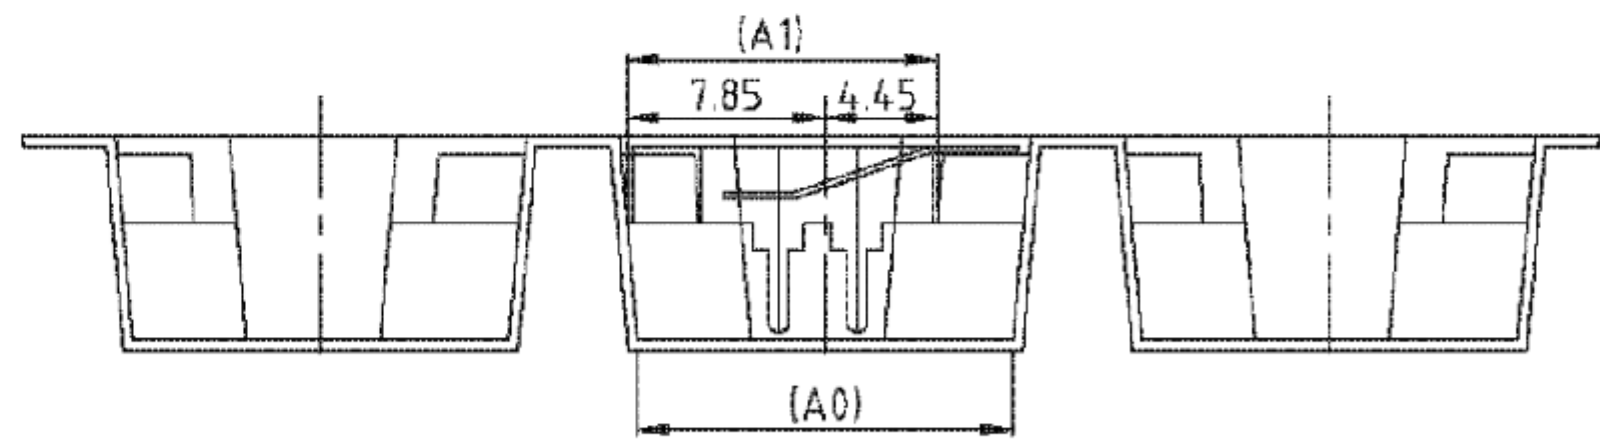
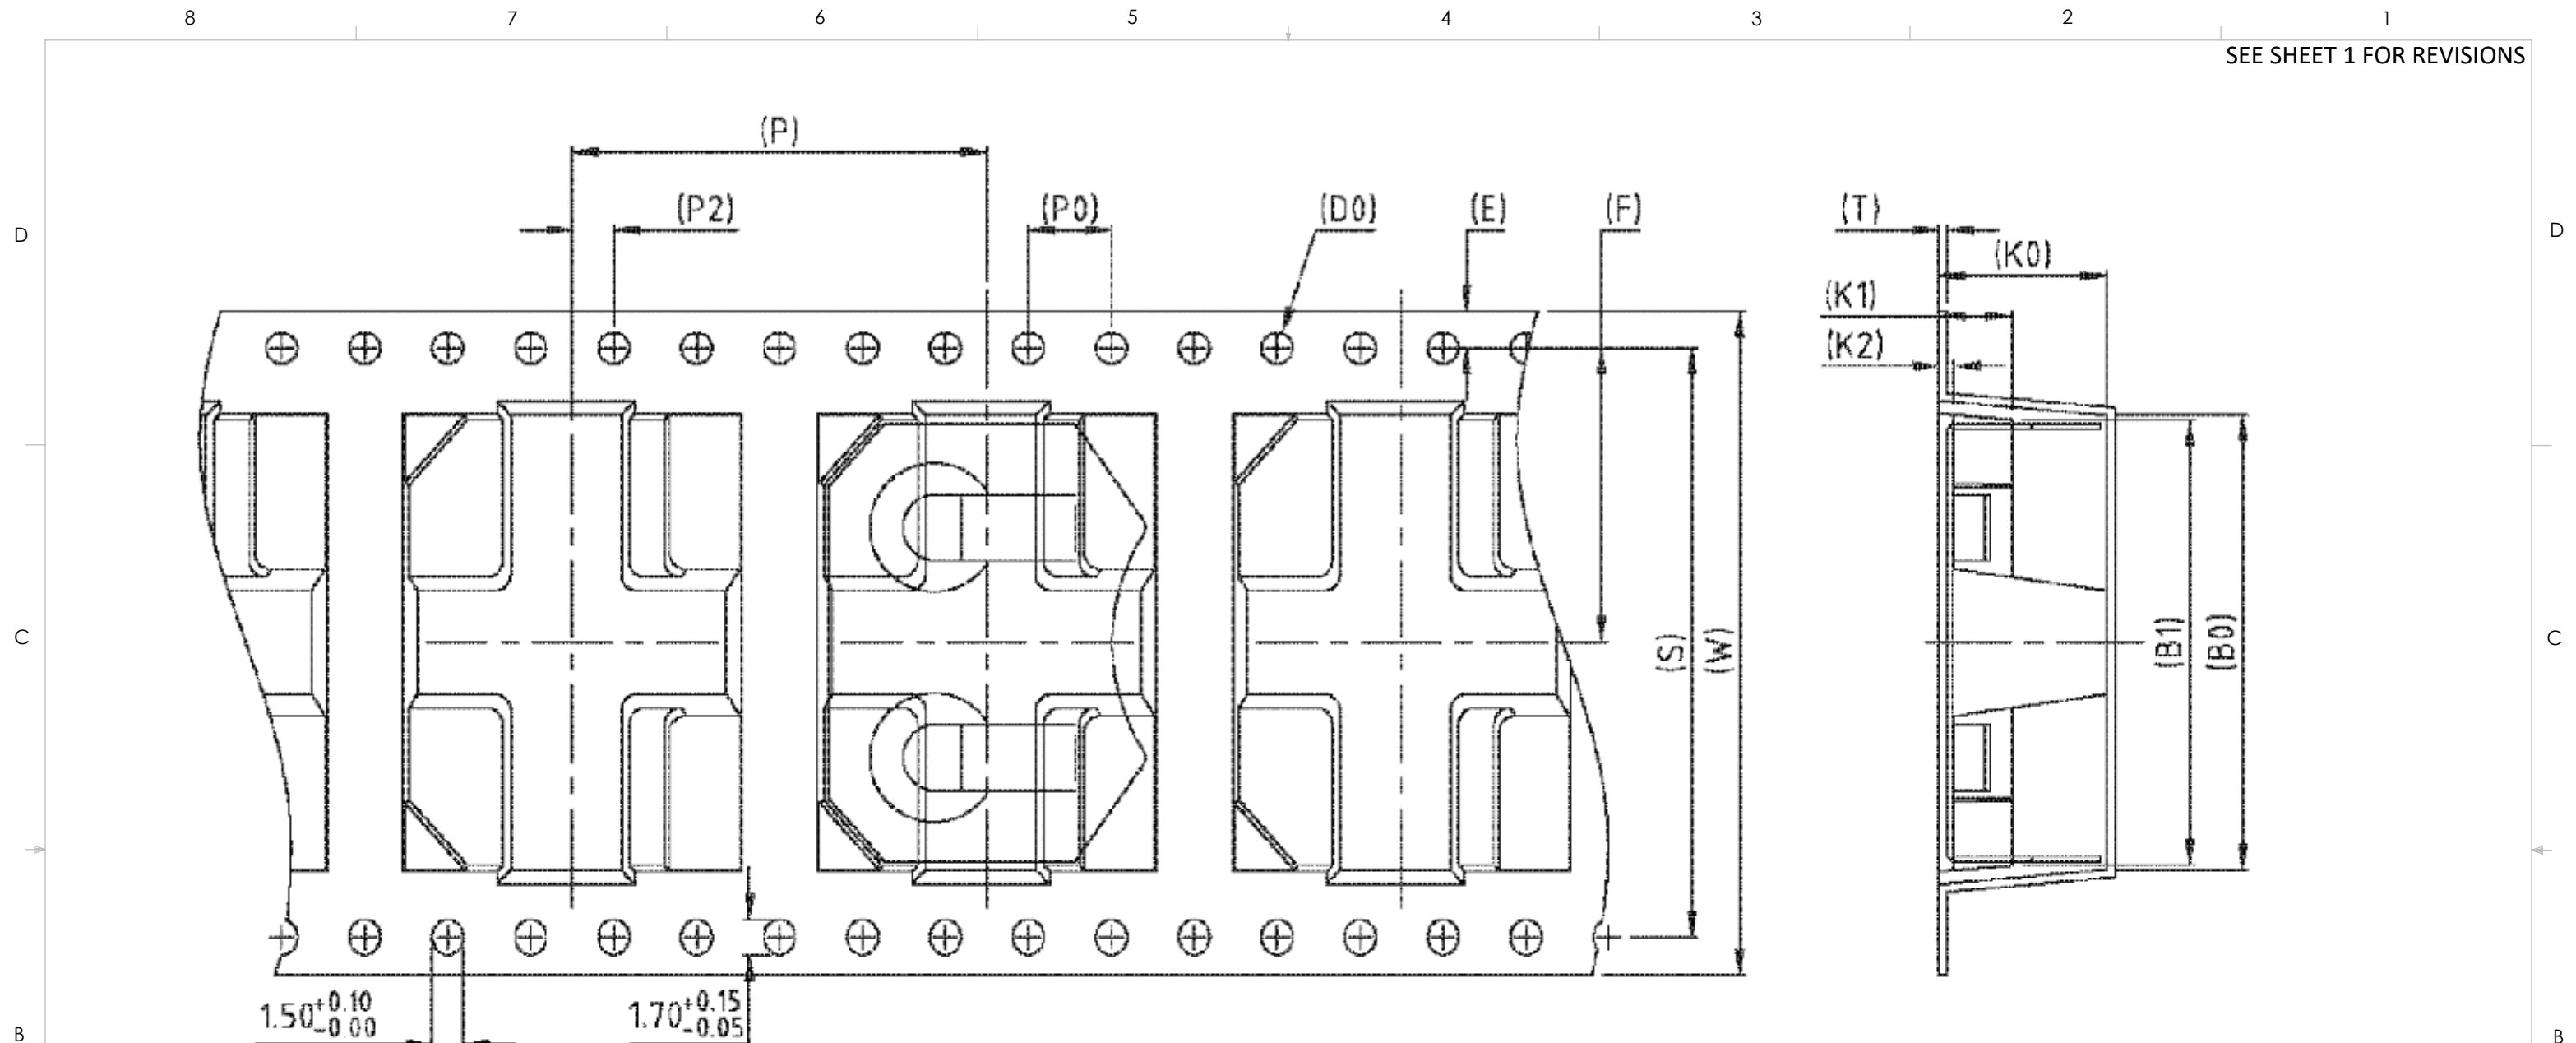
REVISIONS			
REV	DESCRIPTION	DATE	APPV
A	INITIAL RELEASE	6-SEP-11	SAH
B	UPDATED SHEET FORMAT; ADDED PART NUMBER TABLE AND SECOND SHEET	23-JUL-18	CLL



**SECTION A-A**

- NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE IN INCHES [mm].
  2. DIMENSIONS APPLY AFTER FINISHING.
  3. MANUFACTURE TO BE COMPLIANT WITH EU RoHS DIRECTIVE, USE MATERIALS THAT DO NOT CONTAIN REACH SUBSTANCES OF VERY HIGH CONCERN >1000ppm, AND USE DRC CONFLICT-FREE SOURCED MATERIALS.
  4. SAFETY BREAK ALL SHARP CORNERS AND EDGES .02 MAXIMUM.
  5. MINIMUM INSIDE BEND RADII 0.00 [0.0].
  6. EMBOSS LINX LOGO AS SHOWN, MINIMUM 0.002 [0.05] DEEP, PER FILE *LINX-LOGO-BLACK-ABBREVIATED.PDF*.

PART NUMBER		PACKAGING	
BAT-HLD-001-THM		BULK	
BAT-HLD-001-THM-TR		TAPE & REEL	
<p><b>WARNING:</b> THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS DESIGNATED AGENTS.</p>		 <p>159 ORT LANE MERLIN, OR 97532</p>	
MATERIAL: PHOSPHOR BRONZE #C-5191	<p>INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5.</p> <p>.X ±2.0 .XX ±1.00 .XXX ±.500</p> <p>ANGLES: ±1° SURFACE: √</p>	<p>PROJECTION:</p> 	TITLE: <b>BATTERY HOLDER THROUGH HOLE MOUNT</b>
FINISH: NICKEL PLATE	<p>DRAWN: S.HOGAN DT: 8-JUN-11</p> <p>ENGR: S.HOGAN DT: 8-JUN-11</p>	<p>SIZE <b>B</b> DWG. NO. C-BAT-HLD-001-THM-pp</p> <p>SCALE: 3:1 DO NOT SCALE DRAWING</p>	<p>REV <b>A</b></p> <p>SHEET 1 OF 2</p>



- NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
  2. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$ MM.
  3. MATERIAL: BLACK POLYSTYRENE.
  4. PACKING LENGTH PER 22" REEL: 27.0 m.
  5. COMPONENT LOAD PER 13" REEL: 400.
  6. ANGLE TOLERANCE:  $\pm 1^\circ$
  7. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm.

W	32.00 $\pm$ 0.30	P	20.00 $\pm$ 0.10	A0	14.90 $\pm$ 0.10	B0	21.90 $\pm$ 0.10
S	28.40 $\pm$ 0.10	P0	4.00 $\pm$ 0.10	A1	12.30 <sup>+0.15</sup> <sub>-0.05</sub>	B1	21.50 $\pm$ 0.10
E	1.75 $\pm$ 0.10	P2	2.00 $\pm$ 0.10	A2		B2	
F	14.20 $\pm$ 0.15	D0	$\varnothing 1.50^{+0.10}_{-0.00}$	K0	8.10 $\pm$ 0.10	K2	0.70 $\pm$ 0.10
T	0.40 $\pm$ 0.05	D1		K1	3.50 $\pm$ 0.10	COLOR: BK/ANT	

SIZE	DWG. NO.	REV
<b>B</b>	BAT-HLD-001-THM-TR	<b>B</b>
SCALE: 3:1	DO NOT SCALE DRAWING	SHEET 2 OF 2