




AMP CT

TE Internal #: 2-292141-6  
PCB Mount Header, Vertical, Wire-to-Board, 26 Position, 2 mm [.079 in] Centerline, Fully Shrouded, Tin, Through Hole - Solder, Power & Signal, AMP CT

[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles > CT 2mm Dbl Row Assembly w/Boss: Vert.

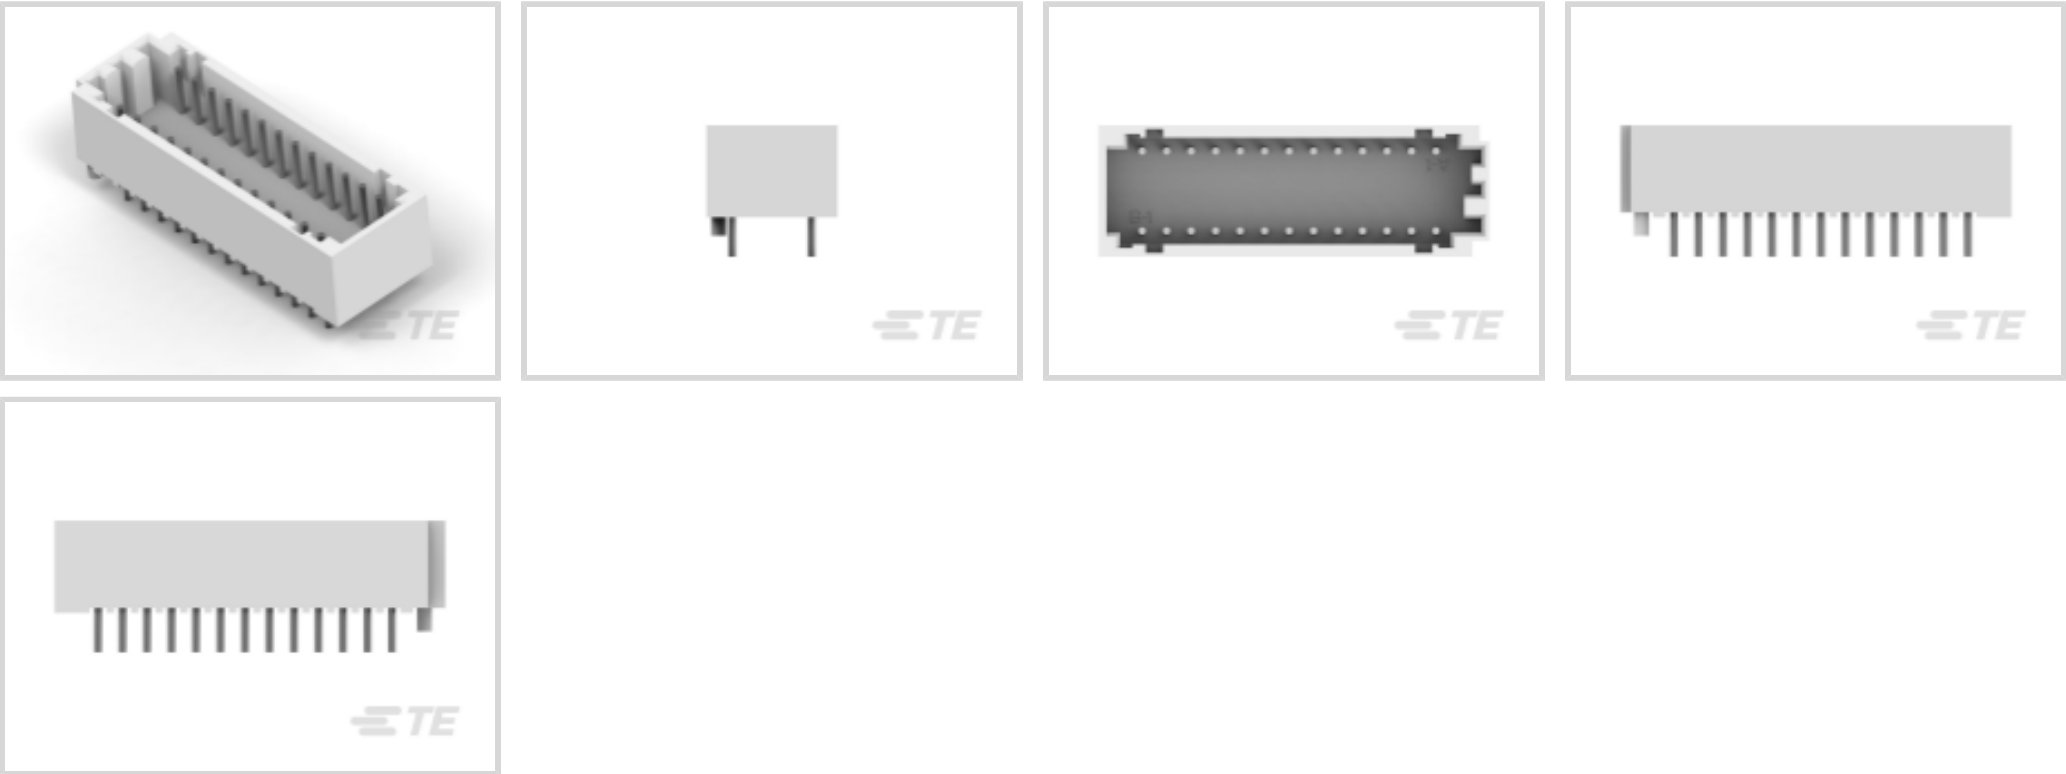

Connector System: **Wire-to-Board**  
Number of Positions: **26**  
Number of Rows: **2**  
Centerline (Pitch): **2 mm [ .079 in ]**  
PCB Mount Orientation: **Vertical**

[All CT 2mm Dbl Row Assembly w/Boss: Vert. \(26\)](#)

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Connector System                  | Wire-to-Board         |
| Header Type                       | Fully Shrouded        |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |
| PCB Connector Assembly Type       | PCB Mount Header      |

Configuration Features

|                       |          |
|-----------------------|----------|
| Number of Positions   | 26       |
| Number of Rows        | 2        |
| PCB Mount Orientation | Vertical |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 125 VAC |
|-------------------|---------|

Body Features

|  |  |
|--|--|
|  |  |
|--|--|



|                       |         |
|-----------------------|---------|
| Primary Product Color | Natural |
|-----------------------|---------|

Contact Features

|                                                         |                 |
|---------------------------------------------------------|-----------------|
| Contact Mating Area Length                              | 4.7 mm[.185 in] |
| PCB Contact Termination Area Plating Material Thickness | 1 μm[39.37 μin] |
| Contact Layout                                          | Inline          |
| Mating Pin Diameter                                     | .6 mm[.024 in]  |
| Contact Shape & Form                                    | Round, Rounded  |
| Contact Mating Area Plating Material Finish             | Bright          |
| PCB Contact Termination Area Plating Material           | Tin             |
| Contact Base Material                                   | Brass           |
| Contact Mating Area Plating Material                    | Tin             |
| Contact Type                                            | Pin             |
| Contact Current Rating (Max)                            | 4 A             |

Termination Features

|                                             |                       |
|---------------------------------------------|-----------------------|
| Round Termination Post & Tail Diameter      | .6 mm[.024 in]        |
| Termination Post & Tail Length              | 3.2 mm[.126 in]       |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

|                          |                |
|--------------------------|----------------|
| PCB Mount Alignment Type | Boss           |
| Mating Alignment Type    | Polarization   |
| Mating Retention         | Without        |
| PCB Mount Retention Type | Boardlock      |
| Mating Retention Type    | Polarized Lock |
| Connector Mounting Type  | Board Mount    |
| Mating Alignment         | With           |
| PCB Mount Alignment      | With           |
| PCB Mount Retention      | With           |

Housing Features

|                    |               |
|--------------------|---------------|
| Housing Material   | 66 Nylon      |
| Centerline (Pitch) | 2 mm[.079 in] |

Dimensions

|                  |                   |
|------------------|-------------------|
| Connector Length | 31.9 mm[1.255 in] |
|------------------|-------------------|



|                             |                  |
|-----------------------------|------------------|
| Connector Height            | 7.5 mm[.295 in]  |
| Connector Width             | 10.7 mm[.421 in] |
| PCB Thickness (Recommended) | 1.6 mm[.063 in]  |
| Row-to-Row Spacing          | 6.5 mm[.256 in]  |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -30 – 105 °C[-22 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                          |                      |
|--------------------------|----------------------|
| Assembly Process Feature | Pick and Place Cover |
| Circuit Application      | Power & Signal       |

Industry Standards

|                                             |                       |
|---------------------------------------------|-----------------------|
| Compatible With Agency/Standards Products   | CSA, UL               |
| Compatible With Approved Standards Products | CSA LR7189, UL E28476 |
| UL Flammability Rating                      | UL 94V-0              |

Packaging Features

|                    |           |
|--------------------|-----------|
| Packaging Quantity | 140       |
| Packaging Type     | Box, Tray |

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JUNE 2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                             |
| Solder Process Capability                     | Wave solder capable to 240°C                                                                                                    |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2-179472-6  
CT DBL ROW HOLDER,CRIMP,26P,NA

TE Part # 2-175133-6  
CT DOUBLE ROW 26P HOLDER NATU.

TE Part # 2-179608-6  
CT DBL ROW HOLDER,MT,26P,NA

Also in the Series | AMP CT

Connector Contacts(8)

Connector Hardware(46)

PCB Headers & Receptacles(756)

Wire-to-Board Connector Assemblies & Housings(255)

Customers Also Bought

TE Part #2-292141-2  
CT 2mm Dbl Row Assembly w/Boss: Vert.

TE Part #1-292230-1  
1.5 MINI CT SGL V SMT W/BOSS 1

TE Part #1-292231-1  
1.5 MINI CT SGL V SMT W/O BOSS

TE Part #5-292208-6  
MINI CT D/R DIP 36P BLACK



|                                                                                                                                            |                                                                                                                                             |                                                                                                                                                   |                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>TE Part #4-292208-6<br/>MINI CT D/R DIP 26P BLACK</p> |  <p>TE Part #5-292208-8<br/>MINI CT D/R DIP 38P BLACK</p> |  <p>TE Part #9-292131-0<br/>SGL HDR ASSY BOX DIP V POLARIS</p> |  <p>TE Part #9-292131-5<br/>SGL HDR ASSY BOX DIP V POLARIS</p> |
|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|

Documents

Product Drawings

CT DOUBLE ROW ASSY V 26P W/BOS

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-292141-6\_O.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2-292141-6\_O.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2-292141-6\_O.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Product Specification

English

CT DOUBLE ROW CONNECTOR, LEAD FREE VERSION

Japanese

Product Specification

Japanese

Product Specification

English