

	REVISIONS								
REV	ECO	DESCRIPTION	DATE	BY	APPR				
A1		RELEASE NEW DRAWING	19/AUG/20	IAN	TOMMY				

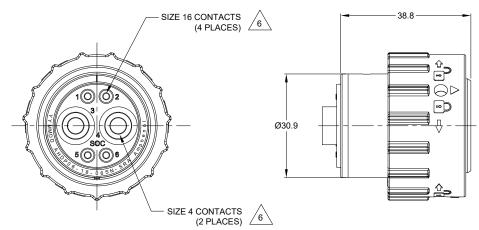

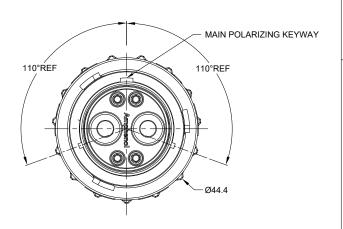

## NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:


HOUSING: THERMOPLASTIC; BLACK SEAL: SILICONE RUBBER

2. MODIFICATIONS: SMOOTH RING ADAPTER; STANDARD DIA. WIRE SEAL

- 3. SPECIFICATIONS:
  - 3.1 OPERATING TEMPERATURE: -55°C TO +125°C.
  - 3.2 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
  - 3.3 INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.
  - 3.4 MOISTURE RESISTANCE: IP67&IP69K (MATED CONDITION).
  - 3.5 MATING CYCLE DURABILITY: 100 CYCLES
  - 3.6 RoHS COMPLIANT
- 4. MATING PART: AHDP04-18-06P\* ( \* = SEAL TYPE ) (NOT C030 OPTION)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

6 CONTACT SIZE AND WIRE RANGE:

CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	TYPICAL WIRE RANGE	CURRENT RATING
16	2.54 mm (.100in)	3.40 mm (.134 in)	14-20 AWG (2.0-0.5mm²)	13 AMPS
4	6.63 mm (.261in)	7.41mm (.292 in)	6 AWG (16.0-13.0mm²)	100 AMPS



SMOOTH RING ADAPTER - GREEN

AHDP06-18-06S			-SRA	REF:HDP26-18-6SN					
	PART NUMBER			DESCRIPTION			ITEM		
QUANTITY			MATERIALS LIST						
UNLESS OTHERWISE SPECIFIED  1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30   Fractions +1/64			NATURES	DATE	1 Amphono				
		DRAWN:	IAN.XIAO	19/AUG/20	Amphenol				
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:	ORION.LI	20/AUG/20	Sine Systems - www.amphenol-sine		e Systems - www.amphenol-sine.com		
3) Note reference = X		ENGINEER:			44724 Morley Drive Clinton Township, MI 48036				
MATERIAL SPECIFICA	ITIONS:	APPROVAL:	TOMMY.XIE	21/AUG/20	Clinton Township, Mt 40036				
		CUSTOMER:			PLUG, 18 SZ, 6 PIN, STD ARRANGEMEN				
PROCESS SPECIFICATIONS:				IS SUPPLIED FOR NORMAL SEAL, SRA, DURAMATE AH				SERIES	
		THE AMPHEN OF REPRODU	EON ARE THE F VOL CORPORAT JCTION ARE IMI	TION. NO RIGHTS PLIED. ALL	B C	<b>)</b> -	AHDP06-18-06SN-SRA	A1	
NEXT ASSY:		DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.		SCALE: NON	JE.	SHEET 1 (	∋ 1		

## A Series™ - Contact Size 16 Options (Works with: AT, ATV, AHD-9, ARC, DuraMate and PanelMate Series)

	Machined Contacts, Sockets & Pins						
Part Number	Description	Size	AWG	Туре			
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined			
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined			
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined			
AT62-209-16141	Female Contact - Socket, Nickel-plated	16	14	Machined			
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined			
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined			
AT60-202-16141	Male Contact - Pin, Nickel-plated	16	16-20	Machined			
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined			
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined			
AT62-201-1631-22	Female Contact - Socket, Gold-plated	16	22-24	Machined			
AT60-202-16141-22	Male Contact - Pin, Nickel-plated	16	22-24	Machined			
AT62-201-16141-22	Female Contact - Socket, Nickel-plated	16	22-24	Machined			

Tooling - Machined Contacts				
Part Number	Part Number Description			
AUTK-16	Hand Crimp Tool, Size 16			
AUTK-100	Universal Heavy Duty Contact Crimping Tool Kit, Size 12/16/20			
CA-5D12	Universal Hand Crimp Tool, Size 12/16/20			
CA-5E12	Pneumatic Crimp Tool, Size 12/16/20			

Contact Removal Tools (For both Machined or Stamped & Formed Contacts)					
Part Number	Description				
ATRT-100	Contact and Wedgelock Extraction Tool				
AT11-310-1605	Contact Removal Tool, Plastic, Size 16				

Sealing Plugs (For both Machined or Stamped & Formed Contacts)				
Part Number Description				
A114017	Sealing Plug, Size 16, White			
A114017-SR	Sealing Plug, Size 16, SR01 Series, Black			
AT13-217-1605	Locking Sealing Plug, Size 16, Grey			
AT13-217-1605-SR	Locking Sealing Plug, Size 16, SR01 Series, Red			

Stamped & Formed Contacts, Sockets & Pins							
Description	Size	AWG	Туре				
Male Contact - Pin, Nickel-plated	16	14-18	Stamped & Formed				
Female Contact - Socket, Nickel-plated	16	14-18	Stamped & Formed				
Male Contact - Pin, Gold-plated	16	14-18	Stamped & Formed				
Female Contact - Socket, Gold-plated	16	14-18	Stamped & Formed				
Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed				
Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed				
Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed				
Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed				
Male Contact - Pin, Nickel-plated	16	16-20	Stamped & Formed				
Female Contact - Socket, Nickel-plated	16	16-20	Stamped & Formed				
Male Contact - Pin, Gold-plated	16	16-20	Stamped & Formed				
Female Contact - Socket, Gold-plated	16	16-20	Stamped & Formed				
Male Contact - Pin, Tin-plated	16	16-20	Stamped & Formed				
Female Contact - Socket, Tin-plated	16	16-20	Stamped & Formed				
Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed				
Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed				
Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed				
Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed				
	Description  Male Contact - Pin, Nickel-plated Female Contact - Socket, Nickel-plated Male Contact - Pin, Gold-plated Female Contact - Socket, Gold-plated Male Contact - Pin, Nickel-plated Male Contact - Pin, Nickel-plated Male Contact - Socket, Nickel-plated Male Contact - Socket, Nickel-plated Male Contact - Socket, Gold-plated Female Contact - Socket, Gold-plated Male Contact - Pin, Nickel-plated Female Contact - Socket, Nickel-plated Male Contact - Pin, Gold-plated Female Contact - Socket, Gold-plated Male Contact - Pin, Tin-plated Female Contact - Pin, Tin-plated Male Contact - Pin, Nickel-plated Male Contact - Pin, Gold-plated	DescriptionSizeMale Contact - Pin, Nickel-plated16Female Contact - Socket, Nickel-plated16Male Contact - Pin, Gold-plated16Female Contact - Socket, Gold-plated16Male Contact - Pin, Nickel-plated16Female Contact - Pin, Nickel-plated16Male Contact - Pin, Gold-plated16Female Contact - Pin, Gold-plated16Male Contact - Pin, Mickel-plated16Female Contact - Socket, Gold-plated16Female Contact - Pin, Nickel-plated16Male Contact - Pin, Gold-plated16Female Contact - Socket, Gold-plated16Male Contact - Pin, Tin-plated16Female Contact - Pin, Tin-plated16Male Contact - Pin, Nickel-plated16Male Contact - Pin, Nickel-plated16Female Contact - Socket, Nickel-plated16Male Contact - Pin, Nickel-plated16Male Contact - Pin, Nickel-plated16Male Contact - Pin, Gold-plated16	DescriptionSizeAWGMale Contact - Pin, Nickel-plated1614-18Female Contact - Socket, Nickel-plated1614-18Male Contact - Pin, Gold-plated1614-18Female Contact - Socket, Gold-plated1614-18Male Contact - Pin, Nickel-plated1616-18Female Contact - Socket, Nickel-plated1616-18Male Contact - Pin, Gold-plated1616-18Female Contact - Socket, Gold-plated1616-18Male Contact - Pin, Nickel-plated1616-20Female Contact - Socket, Nickel-plated1616-20Male Contact - Pin, Gold-plated1616-20Female Contact - Socket, Gold-plated1616-20Male Contact - Pin, Tin-plated1616-20Female Contact - Pin, Tin-plated1616-20Male Contact - Pin, Nickel-plated1616-20Male Contact - Socket, Tin-plated1616-20Male Contact - Pin, Nickel-plated1620-22Female Contact - Socket, Nickel-plated1620-22Male Contact - Pin, Gold-plated1620-22				

Tooling - Stamped & Formed Contacts			
MFX-3950	Crimp Die - Size 16, 18-20AWG		
MFX-3953	Crimp Die - Size 16, 16-18AWG		
MFX-3975	Crimp Die - Size 16, 14-16AWG		
MFX-3990	Crimp Die - Size 16, 20-22AWG		
ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG		
ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG		
ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG		

## A Series™ - Contact Size 4 Options (Works with: ATHD and DuraMate Series)

Machined Contacts, Pins and Sockets						
Part Number	Description	Size	AWG	Туре	Amps	
AT60-203-04141-4	Male Contact - Pin, Copper Alloy, Nickel-Plated	4	4	Machined	100A	
AT60-204-0490	Male Contact - Pin, Copper Alloy, Nickel-Plated	4	6	Machined	100A	
AT62-203-04141-4	Female Contact - Socket, Copper Alloy, Nickel-Plated	4	4	Machined	100A	
AT62-203-04141	Female Contact - Socket, Copper Alloy, Nickel-Plated	4	6	Machined	100A	

Tooling - Machined Contacts					
Part Number	Description				
WA23 Heavy Duty Pneumatic Crimp Tool -Uses Universal Positioner Part No. WA23-101DA and Crimp Locator MFX-3961					
WA23-138DA	Die Assembly -for Heavy Duty Pneumatic Crimp Tool, Size 4				
WA23-11	Contact Locator, Size 4				
96-978-22	Crimper and Dies -for Size 10mm²-185mm² Wires				
AT11-027-0405	Contact Removal Tool, Plastic, Size 4, 4AWG				