



Connectors > Terminal Blocks & Strips > PCB Terminal Blocks



Terminal Block Connector Type: **Header**

Connector System: **Wire-to-Board**

Number of Positions: **15**

Centerline (Pitch): **5.08 mm [ .2 in ]**

Number of Rows: **1**

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Wire Protection                   | With                  |
| Header Type                       | Fully Shrouded        |
| Terminal Block Connector Type     | Header                |
| Connector System                  | Wire-to-Board         |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

|                        |                |
|------------------------|----------------|
| Stacking Configuration | Side Stackable |
| Number of Positions    | 15             |
| Number of Rows         | 1              |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 300 VAC |
|-------------------|---------|

Body Features

|                       |          |
|-----------------------|----------|
| Primary Product Color | Black    |
| Product Orientation   | Vertical |



Contact Features

|                                      |                  |
|--------------------------------------|------------------|
| Contact Mating Area Plating Material | Tin              |
| Contact Base Material                | Copper Magnesium |
| Contact Current Rating (Max)         | 15 A             |

Termination Features

|                                             |                       |
|---------------------------------------------|-----------------------|
| Termination Post & Tail Length              | 2.6 mm[.102 in]       |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

|                         |             |
|-------------------------|-------------|
| Connector Mounting Type | Board Mount |
|-------------------------|-------------|

Housing Features

|                    |                            |
|--------------------|----------------------------|
| Housing Material   | High Temperature Polyamide |
| Centerline (Pitch) | 5.08 mm[.2 in]             |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 – 105 °C[-40 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Packaging Features

|                  |     |
|------------------|-----|
| Packaging Method | Box |
|------------------|-----|

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>


|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023 (235)<br>Candidate List Declared Against: JUNE 2022 (224)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                             |
| Solder Process Capability                     | Reflow solder capable to 260°C                                                                                                  |




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

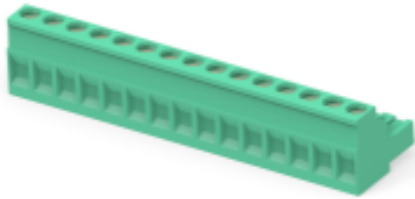


TE Part # 1-796634-5  
15 POS 5.08MM R/A PLUG,TRM BLK

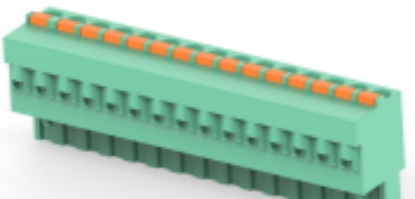

TE Part # 1-1986262-5  
15 POS PLUG SPRING CONN, PITCH 5.08

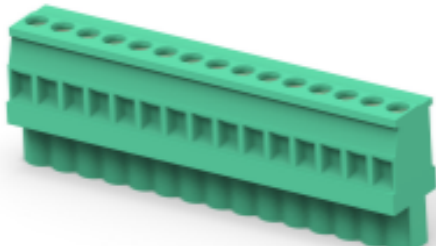


TE Part # 1-284041-5  
TERMINAL BLOCK VERTICAL PLUG STACK

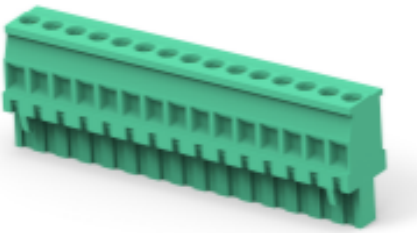

TE Part # 1-284047-5  
TERMI-BLOK VERTICAL PLUG STACK


Customers Also Bought

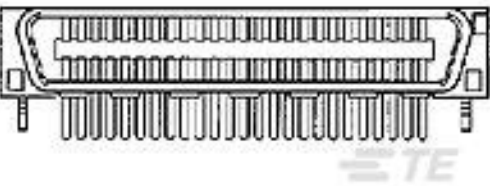

TE Part #3-5179275-8  
CHAMP 050-I PLUG H ASSY 68P



TE Part #2-178216-2  
Header Assembly: Wire-to-Board, 15A, gold or tin plated

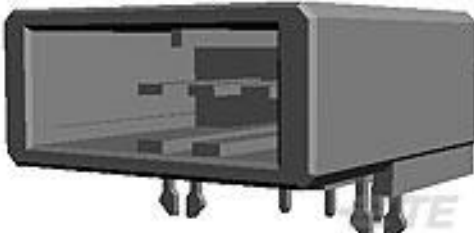

TE Part #2-2013519-0  
DYNAMIC D3900 H-HDR ASSY 10P Y TYPE-A



TE Part #1-2229803-2  
D3950 HDR 7/11POS 1ROW Y KEY



TE Part #3-2134249-3  
D3900S 7.5MM PITCH REC ASSY 3P BLACK Z



TE Part #3-5175475-5  
CHAMP 050 B/B REC V W/LEG 40P



TE Part #3-5175475-7  
CHAMP 050 B/B REC V W/LEG 60P



TE Part #2837892-2  
OCEAN-2.0-APPLICATOR-S-046F053F





Documents

Product Drawings

15POS HDR ST, HT, 5.08MM PITCH, TL 2.6MM

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-2342084-5\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-2342084-5\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-2342084-5\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

BUCHANAN PCB TERMINAL BLOCKS

English

Agency Approvals

UL

English