


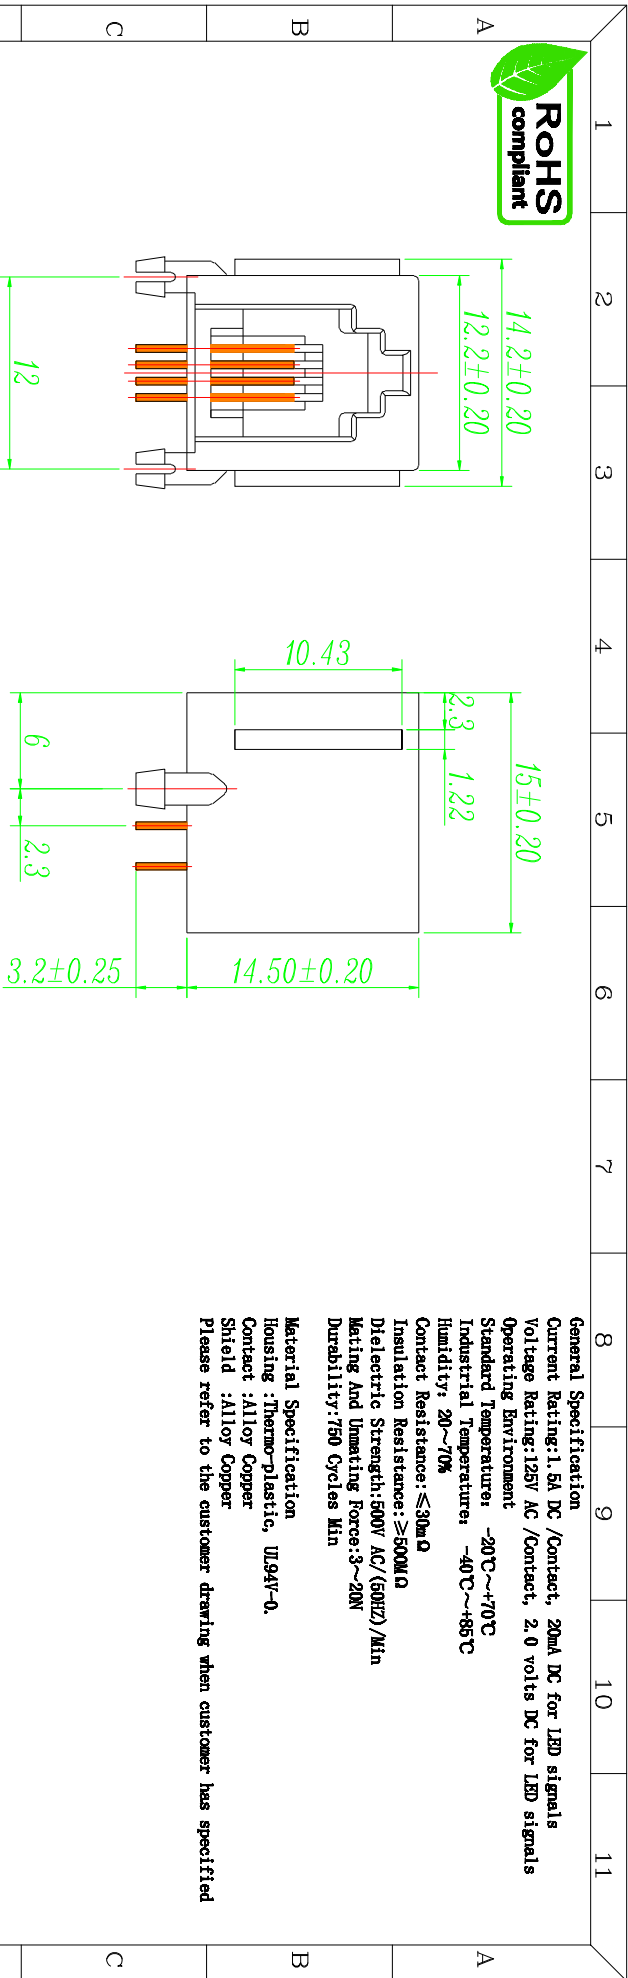


RoHS compliant

General Specification
 Current Rating: 1.5A DC /Contact, 20mA DC for LED signals
 Voltage Rating: 125V AC /Contact, 2.0 volts DC for LED signals
 Operating Environment
 Standard Temperature: -20℃~+70℃
 Industrial Temperature: -40℃~+85℃
 Humidity: 20~70%
 Contact Resistance: ≤30mΩ
 Insulation Resistance: ≥500MΩ
 Dielectric Strength: 500V AC/(50HZ)/Min
 Mating And Umating Force: 3~20N
 Durability: 750 Cycles Min

Material Specification
 Housing :Thermo-plastic, UL94V-0.
 Contact :Alloy Copper
 Shield :Alloy Copper

Please refer to the customer drawing when customer has specified

Dimensions (mm):
 Top View: 14.2±0.20, 12.2±0.20, 12
 Side View: 15±0.20, 10.43, 2.3, 1.22, 6, 2.3, 3.2±0.25, 14.50±0.20

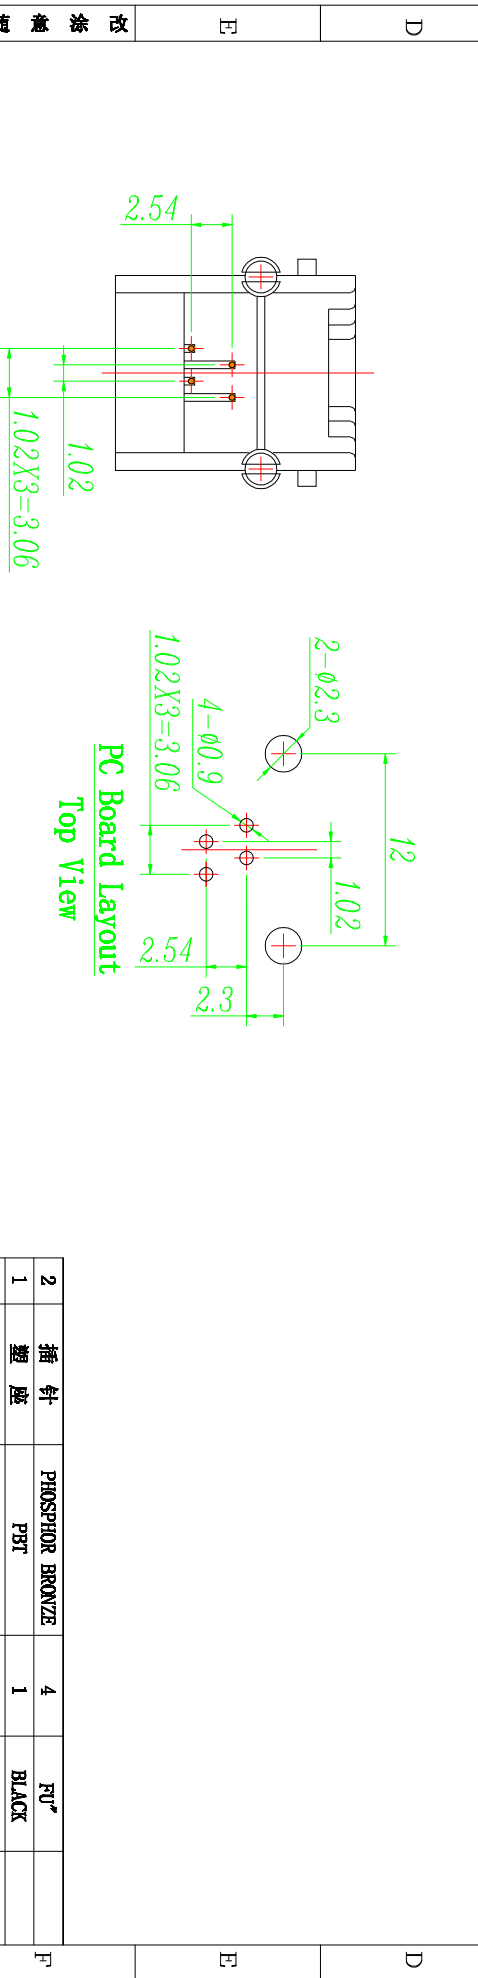

PC Board Layout
Top View

Dimensions and Features:

- Overall width: 12
- Overall height: 1.02
- Top edge features: 2- $\phi 2.3$ (holes), 4- $\phi 0.9$ (holes), 1.02X3=3.06 (segment)
- Bottom edge features: 2.54 (segment), 2.3 (segment)
- Internal dimensions: 2.54, 1.02, 1.02X3=3.06

The drawing shows a network plug housing. The side view (left) indicates a total width of 12mm, a mounting hole diameter of $2-\phi 2.3$, a central slot width of 1.02mm, and a distance of 2.54mm from the side edge to the mounting hole center. The top view (right) shows a rectangular layout with a central slot of width 1.02mm and a distance of 2.3mm from the side edge to the slot center. The overall length is 1.02X3=3.06mm. The top view also shows a central slot of width 1.02mm and a distance of 2.54mm from the side edge to the slot center.

序号	名称	材料	数量	镀层/颜色	备注
2	插针	PHOSPHOR BRONZE	4	PU"	
1	塑座	PBT	1	BLACK	

温州瑞川电子有限公司

网络插座外形图



温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

[illegible]