

<b>GlobTek, Inc.</b> <b>www.globtek.com</b> <b>186 Veterans Drive,</b> <b>Northvale, NJ 07647</b> <b>Tel. (201) 784-1000</b> <b>Fax (201) 784-0111</b>	Drawing Title: NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved) to IEC60320-C13 Approvals: North American cULus, Japan PSE, Taiwan BSMI Black, White, Grn/Yel, GT Cable #104JT: 14 / 2.0mm <sup>2</sup> / 3 Conductors, 9.5mm OD, SJT / VCTF, 105° Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: North American cULus, Japan PSE, Taiwan BSMI, 2800 +/- 50mm, GlobTek Black		
	Model No. Power Cord		
	<table border="1"> <tr> <td data-bbox="308 227 1723 295"> Part No./Ordering No. 302JT104J9F0701JT(R) </td><td data-bbox="1723 227 1915 295"> Rev A </td></tr> </table>	Part No./Ordering No. 302JT104J9F0701JT(R)	Rev A
Part No./Ordering No. 302JT104J9F0701JT(R)	Rev A		

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification  
ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <https://www.globtek.com/iso-certificates/>  
Prop 65 Statement: <https://en.globtek.com/prop-65-statement.pdf>

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<https://en.globtek.com/terms-and-conditions/>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

#### Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

#### Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.  
Contents of this document are subject to change without prior notice.

### Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.  
A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved) to IEC60320-C13 Approvals: North American cULus, Japan PSE, Taiwan BSMI Black, White, Grn/Yel, GT Cable #104JT: 14 / 2.0mm <sup>2</sup> / 3 Conductors, 9.5mm OD, SJT / VCTF, 105° Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: North American cULus, Japan PSE, Taiwan BSMI, 2800 +/- 50mm, GlobTek Black			
	Model No. Power Cord			
	Part No./Ordering No. 302JT104J9F0701JT(R)			Rev A

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
A	Initial release	QA	12/14/2021	QA


Cordset Information:  
CordsetColor:GlobTek Black  
Cord Length (mm):2800 +/- 50

NOTES:

Cord, Plug and Connector must be marked with approval symbols of file number(s)


GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved) to IEC60320-C13 Approvals: North American cULus, Japan PSE, Taiwan BSMI Black, White, Grn/Yel, GT Cable #104JT: 14 / 2.0mm <sup>2</sup> / 3 Conductors, 9.5mm OD, SJT / VCTF, 105° Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: North American cULus, Japan PSE, Taiwan BSMI, 2800 +/- 50mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 302JT104J9F0701JT(R)	Rev A

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

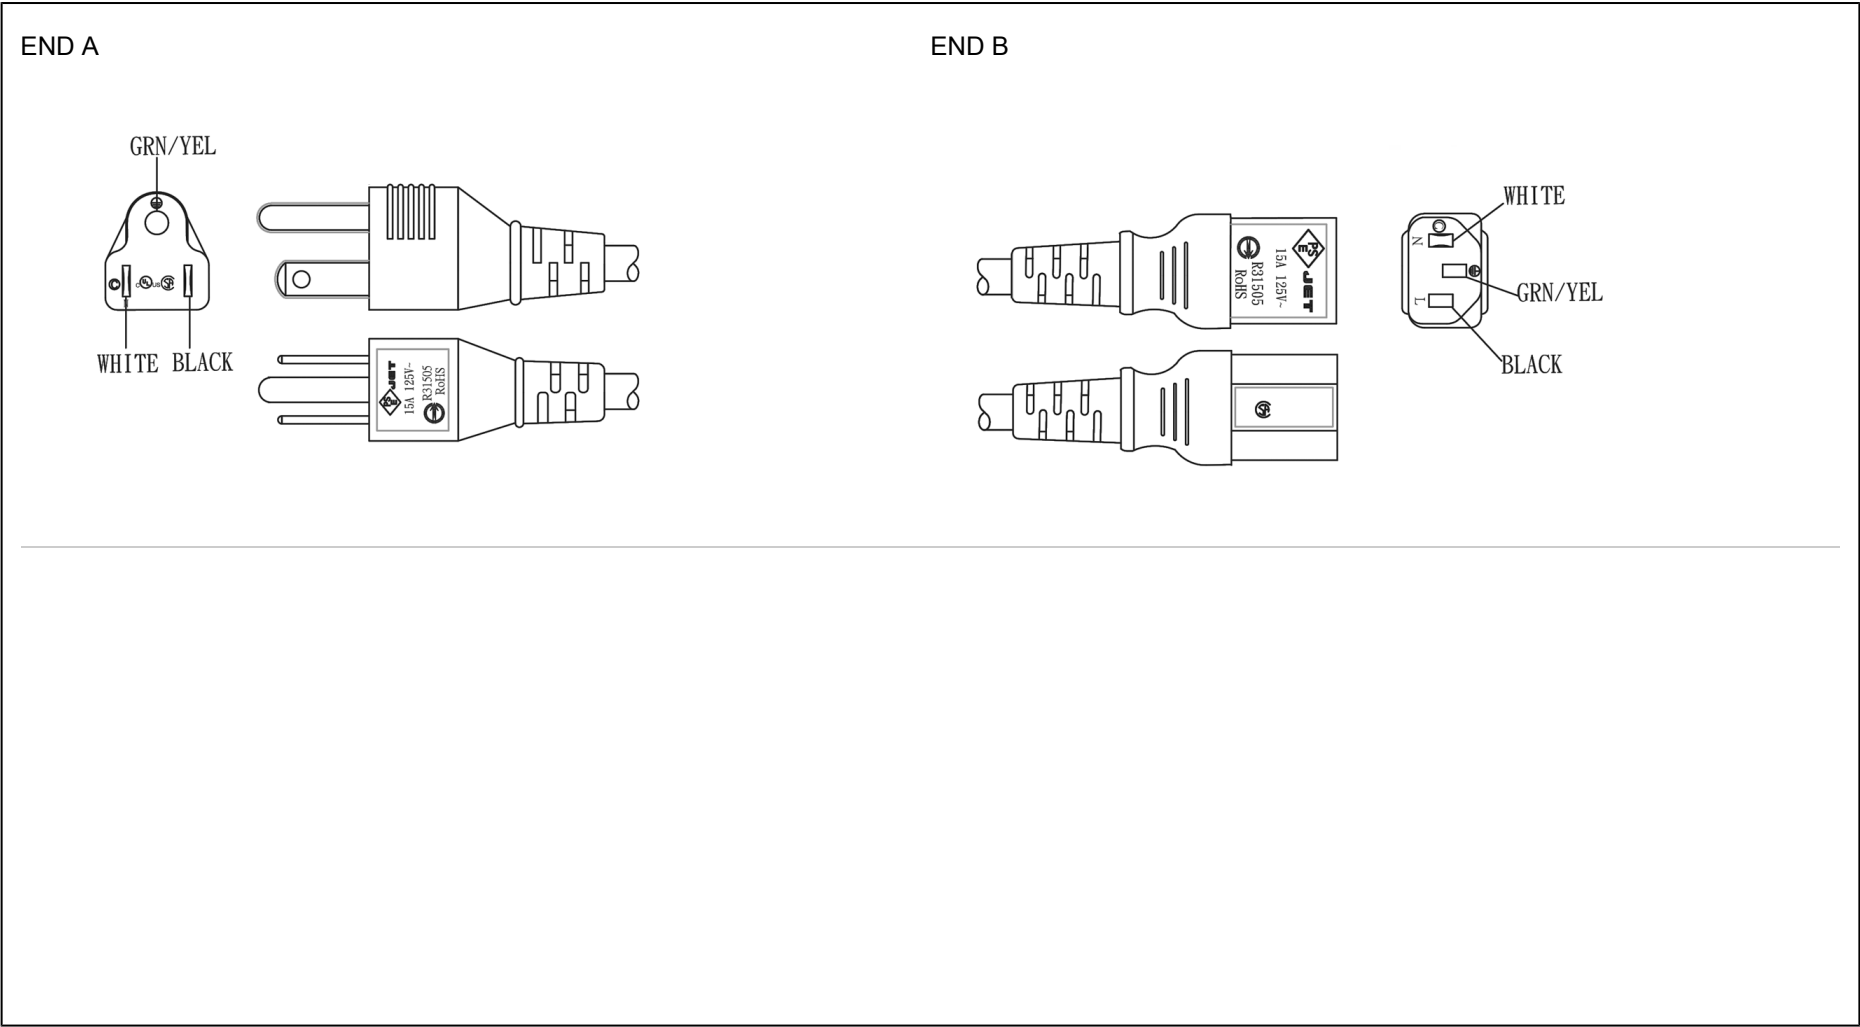

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved) to IEC60320-C13 Approvals: North American cULus, Japan PSE, Taiwan BSMI Black, White, Grn/Yel, GT Cable #104JT: 14 / 2.0mm <sup>2</sup> / 3 Conductors, 9.5mm OD, SJT / VCTF, 105° Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: North American cULus, Japan PSE, Taiwan BSMI, 2800 +/- 50mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 302JT104J9F0701JT(R)	Rev A

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

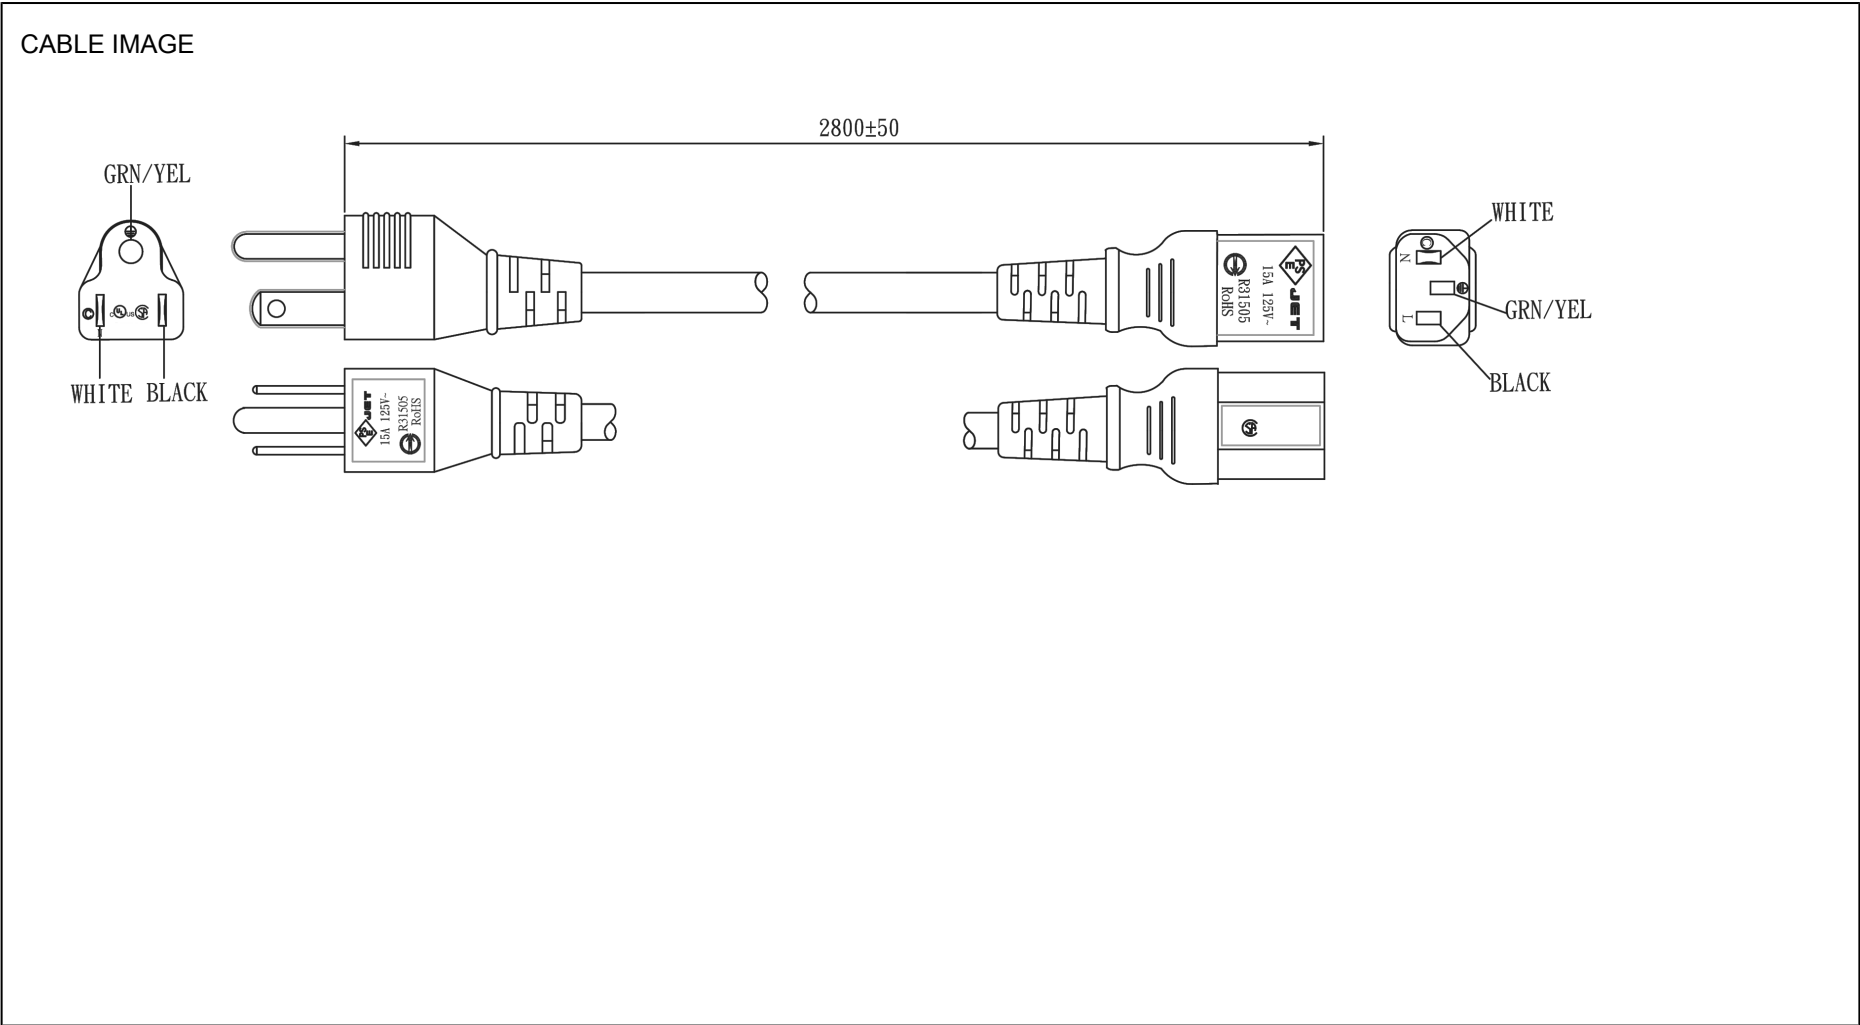




GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved) to IEC60320-C13 Approvals: North American cULus, Japan PSE, Taiwan BSMI Black, White, Grn/Yel, GT Cable #104JT: 14 / 2.0mm <sup>2</sup> / 3 Conductors, 9.5mm OD, SJT / VCTF, 105° Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: North American cULus, Japan PSE, Taiwan BSMI, 2800 +/- 50mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 302JT104J9F0701JT(R)	Rev A

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

End A Code:302JT Description:NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved) Rating (V):125 Rating (A):15.0 Gender:Male Overmolded:Yes	Cable Code:104JT Description:GT Cable #104JT: 14 / 2.0mm <sup>2</sup> / 3 Conductors, 9.5mm OD, SJT / VCTF, 105° Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: North American cULus, Japan PSE, Taiwan BSMI Color:GlobTek Black Wire Gauge(AWG):14 / 2.0mm <sup>2</sup> Cond:3 Type:SJT / VCTF Temperature:105°° C Amps:15 Volts:300 OD:9.5 ConductorsColors:BLK/WHT/GRN-YEL	End B Code:701JT Description:IEC60320-C13 Approvals: North American cULus, Japan PSE, Taiwan BSMI Black, White, Grn/Yel Rating (V):125 Rating (A):15.0 Gender:Female Overmolded:Yes
--	--	---

Overall cable rating:15A 125V

Plug Approvals	Cable Approvals	Connector Approvals
 Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, and cables total up to a UL approved cordset or cable assembly <a href="#">LINK TO CERTs</a> <a href="#">Link to live Power Cords listing @ UL</a> <a href="#">Link to live Flexible Cord listing @ UL</a>  Contact GlobTek for PSE Certs if needed AGENCY ONLINE DOCUMENTS <a href="http://en.globtek.com/cordsets/">http://en.globtek.com/cordsets/</a>	 Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, and cables total up to a UL approved cordset or cable assembly <a href="#">LINK TO CERTs</a> <a href="#">Link to live Power Cords listing @ UL</a> <a href="#">Link to live Flexible Cord listing @ UL</a>  Contact GlobTek for PSE Certs if needed	 Note: North American power cords are certified as assemblies of UL rated parts, so, the combination of UL certified plugs, connectors, and cables total up to a UL approved cordset or cable assembly <a href="#">LINK TO CERTs</a> <a href="#">Link to live Power Cords listing @ UL</a> <a href="#">Link to live Flexible Cord listing @ UL</a>  Contact GlobTek for PSE Certs if needed

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved) to IEC60320-C13 Approvals: North American cULus, Japan PSE, Taiwan BSMI Black, White Grn/Yel, GT Cable #104JT: 14 / 2.0mm <sup>2</sup> / 3 Conductors, 9.5mm OD, SJT / VCTF, 105° Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: North American cULus, Japan PSE, Taiwan BSMI, 2800 +/- 50mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 302JT104J9F0701JT(R)	Rev A

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE


RoHS/RoHS3 Declaration	<a href="https://www.globtek.com/pdf/rohs_cert/01t3a000005KE6qAAG">https://www.globtek.com/pdf/rohs_cert/01t3a000005KE6qAAG</a>
REACH Declaration	<a href="https://www.globtek.com/pdf/iso_certificates/REACH.pdf">https://www.globtek.com/pdf/iso_certificates/REACH.pdf</a>
Conflict Minerals Declaration	<a href="https://www.globtek.com/pdf/conflict-minerals.pdf">https://www.globtek.com/pdf/conflict-minerals.pdf</a>
Prop 65 Statement	<a href="https://en.globtek.com/prop-65-statement.pdf">https://en.globtek.com/prop-65-statement.pdf</a>
CE.UKCA.Cord	<a href="https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t3a000005KE6q">https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t3a000005KE6q</a>

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved) to IEC60320-C13 Approvals: North American cULus, Japan PSE, Taiwan BSMI Black, White, Grn/Yel, GT Cable #104JT: 14 / 2.0mm <sup>2</sup> / 3 Conductors, 9.5mm OD, SJT / VCTF, 105° Deg.C, 300V, BLK/WHT/GRN-YEL, Approvals: North American cULus, Japan PSE, Taiwan BSMI, 2800 +/- 50mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 302JT104J9F0701JT(R)	Rev A

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Hanking:302JT104J6F0701JT(R) hanking  
Description:200 +/- 20mm  
Image:

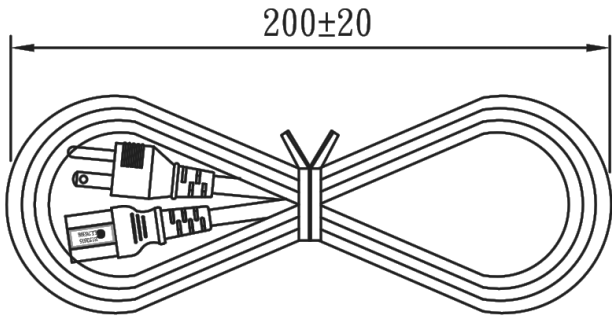

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):