RoHS

REV	ECN NO.	DESRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

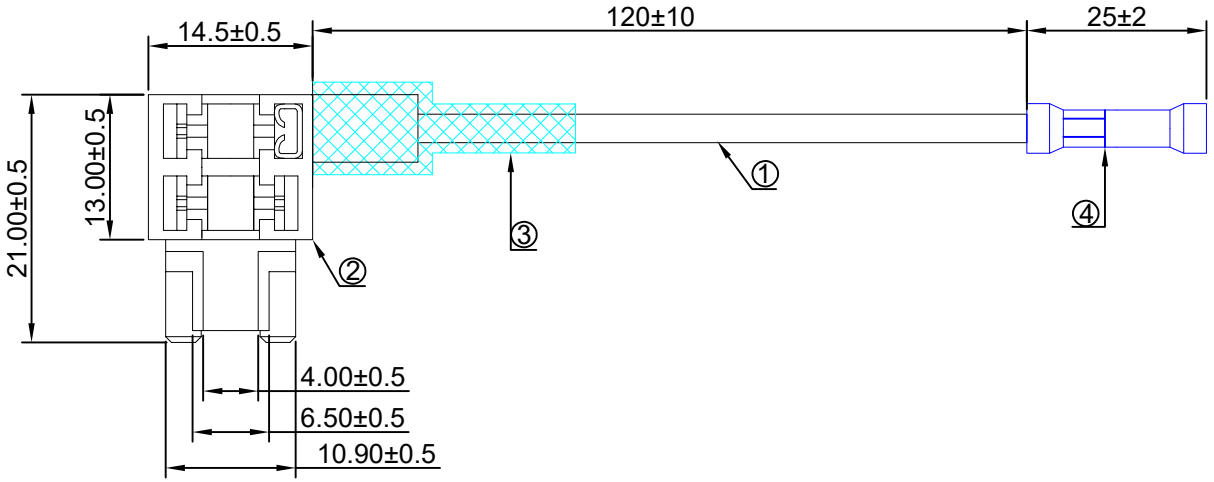

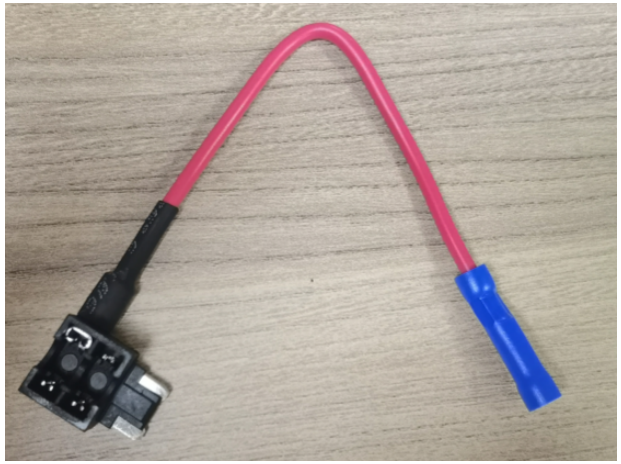

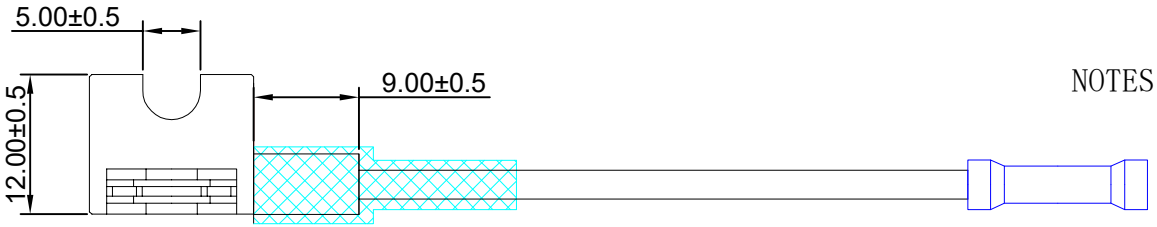

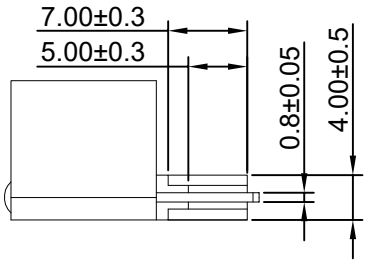

NOTES:UNLESS OTHERWISE SPECIFIED.

1. Applicable:For ATT-N Fuse
2. Electrical:Rated for current up to 15A
3. Insulating body:PA
4. Contact:Brass with Tin plated
5. with other wiet sizes or leangths availableon special order
6. this inline fuseholder designed for turn one slot into two
7. Butt splice connector pull-out force min 15kg

序号 NO.	部件 PARTS	线材 端子（部件） 胶壳 Cable, Terminal (Part) Housing	数量 Quantity
④	端子	Butt Splice connectors	1PCS
③	热缩管	Heat shrink tubing	1PCS
②	连接器	插片取电器	1PCS
①	线材	UL1015 16AWG 红色 OD:3.1MM	1PCS

物料明细表 Material list

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED,COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

PART NO: XF-ACN-120-16

TITLE: FOR ATT UL1015 16#红色 L=120MM

DWG NO: /

APPD	Chen ZhiQiang		
CHKD	Liu Wei	VIEW	
DRAW	Chen HongJiang	SCALE	SHEET / REV
DATE	2024.06.03	NONE	1:1 / A1

XFCN兴飞连接器
0769-82001899
www.xfconn.com