

MESSRS.

SPECIFICATION FOR APPROVAL**承 認 书**

Product	DYNAMIC SPEAKER
Part No.	HDK-4004BB-2C3 (RoHS)
Customer Approval	

Approved By	Checked By	Made By
王台平 APR-21-2020	曹丽萍 APR-21-2020	LILY APR-21-2020

常 州 华 龙 电 子 有 限 公 司**DRAGONSTATE ELECTRONIC CORPORATION**

中国江苏省常州市新区电子园新四路 36 号

Tel: +86-519-85110078. 86-519-85106698, Fax: +86-519-85101081

EDITION:1.1

1. Specification

HDK-4004BB-2C3 (RoHS)

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 40 mm	
03	Rated Input Power	2.0W	
04	Max. Input Power	2.2W for 1 minute	
05	Impedance	4 ohm $\pm$ 15% at 1000Hz.	
06	Resonance Frequency (Fo)	460Hz $\pm$ 20% at Fo, 1V	
07	Sensitivity (S.P.L.)	87dB (1W /1m) $\pm$ 2dB	at AVE 0.8,1.0,1.2,1.5 KHz
08	Frequency Range	Fo – 4.5KHz	
09	Total Harmonics Distortion	Max 8 % at 1 KHz,2.0W.	
10	Dustproof and Waterproof	IP54	
11	Voice Coil	Diameter 13.3 mm	
12	Magnet	Rare earth permanent (Nd-Fe-B) magnet Φ 12.5x1.5 mm	
13	Weight	9.0g $\pm$ 0.5g	
14	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.	
15	Operation Test	Must be normal at program source –2.0W	
16	Buzz, Rattle, etc.	Should not be audible at 2.83V sine Wave between Fo to 20KHz	
17	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.	
18	Terminal Strength	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.	
19	Temperature	Operating temperature: -20°C to +60°C Storage temperature: -30°C to +70°C	

2-1. Test Condition

Standard

Temperature : 15 ~ 35℃

Relative humidity : 25% ~ 85%,

Atmospheric pressure : 860mbar to 1060mbar.

Basic

Temperature : 20±3℃

Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

2-2. Standard Test Fixture

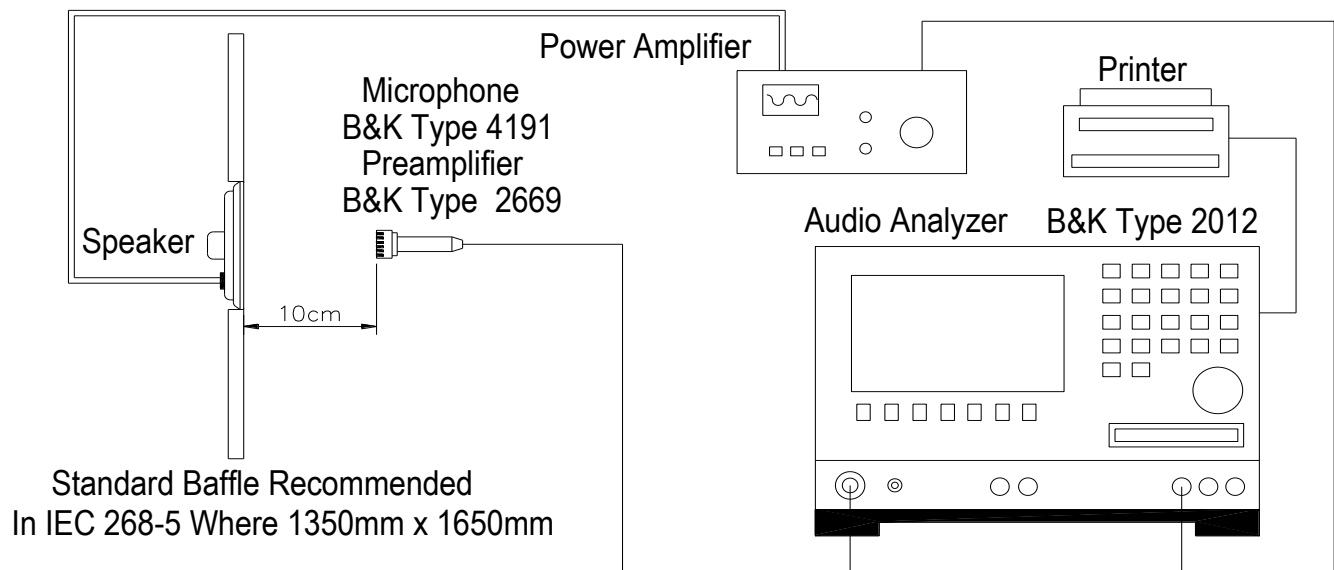
1. Input Power : 1.0W (2.83V)

2. Zero Level : -dB


3. Mode : SPEAKER

4. potentiometer Range : 50dB


5. Sweep Time : 0.5sec




2-3.Frequency Response Curve

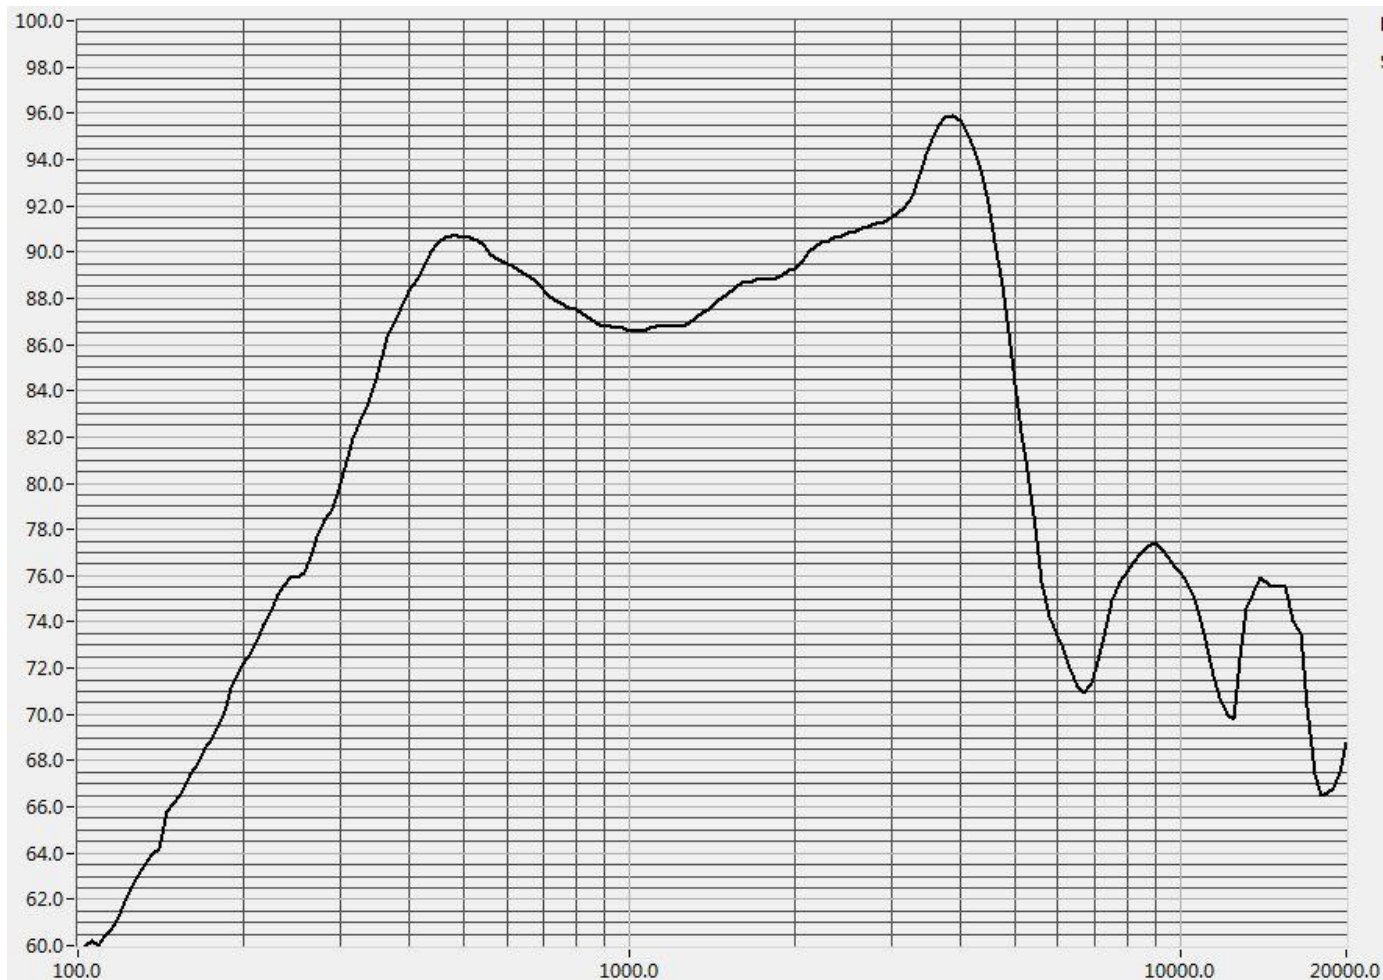

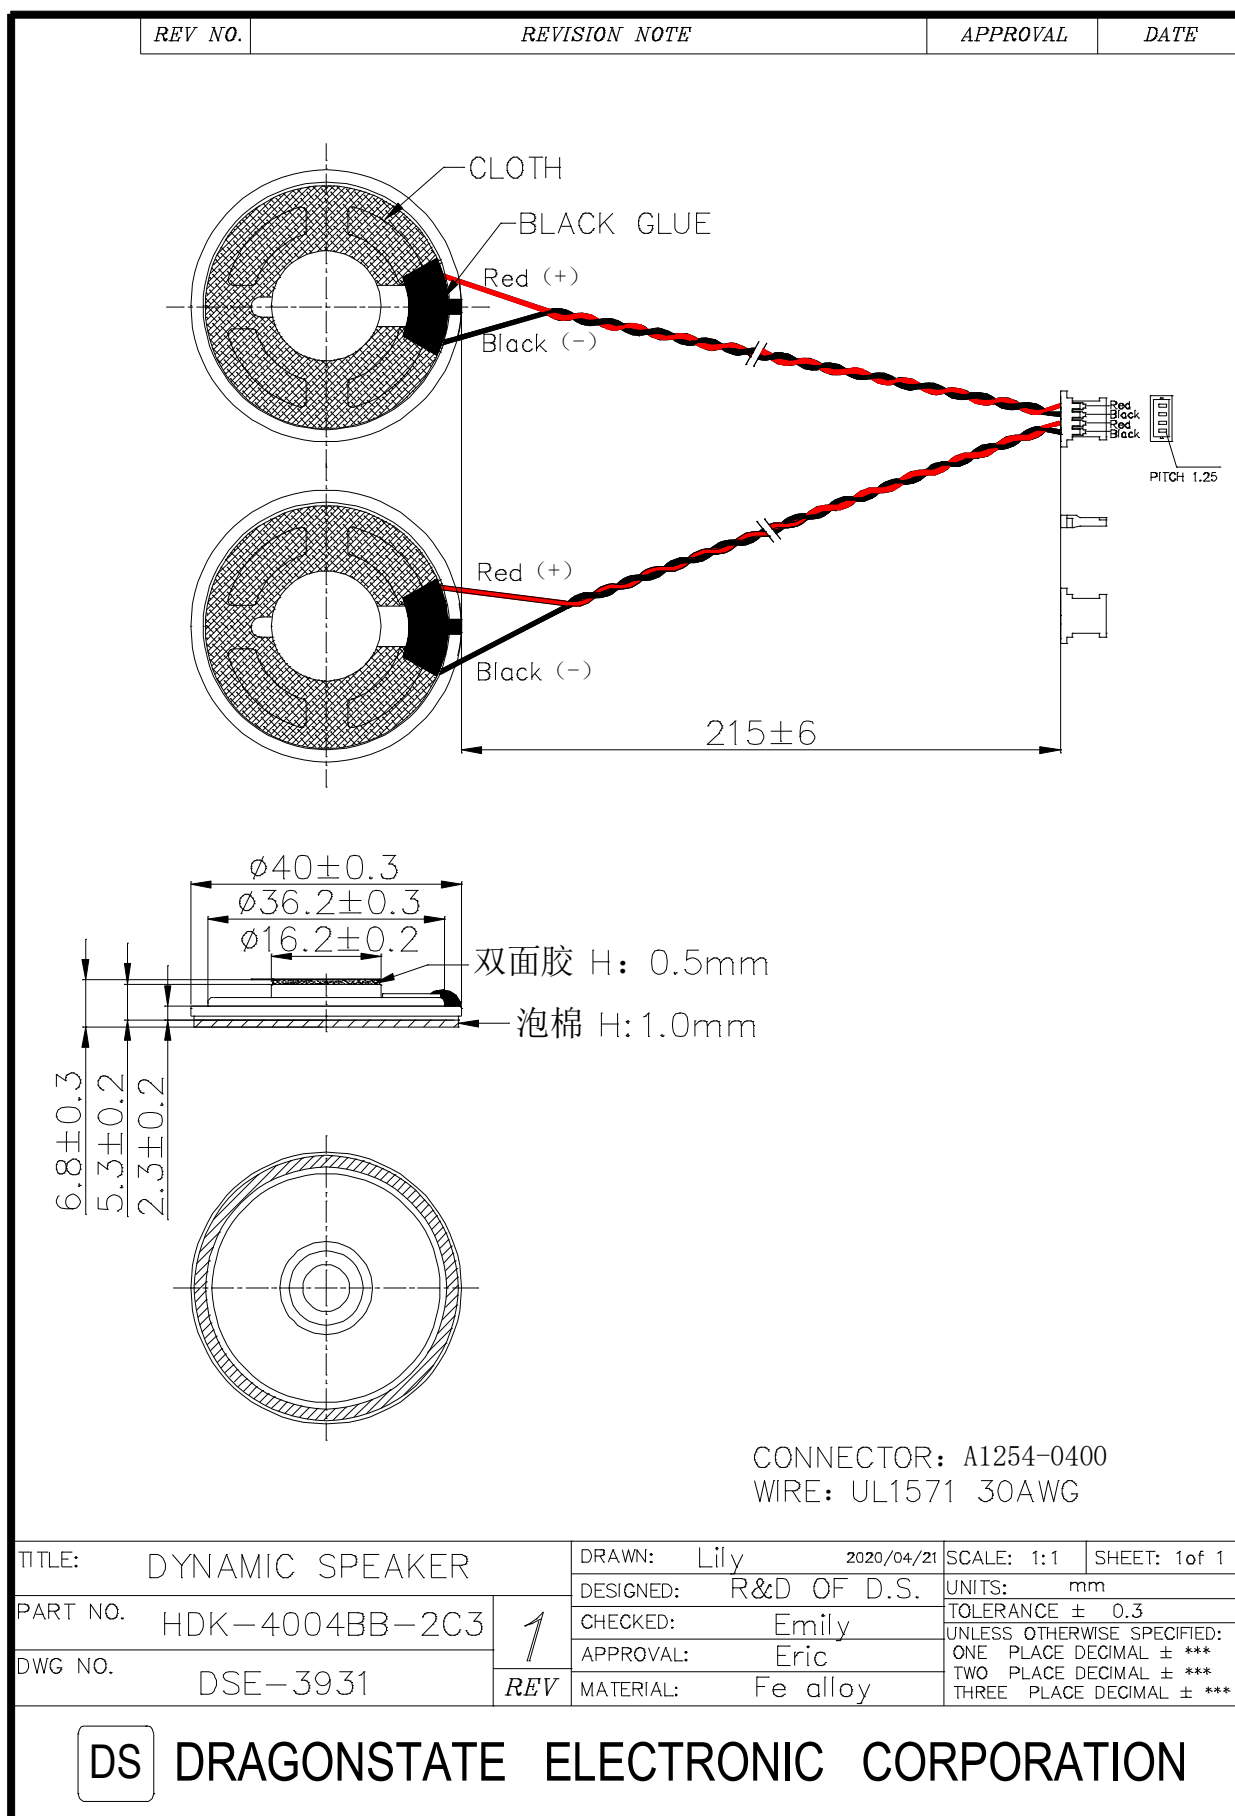3.Dimension



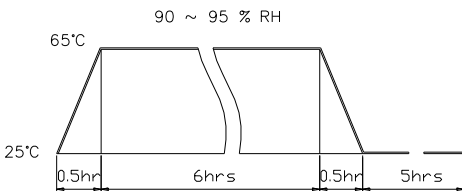4. Reliability Tests




Items.		Specifications
01	High temp. Test	Keep 96 hours at $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
02	Low temp. Test	Keep 96 hours at $-30^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
03	Humidity test	Keep 96 hours at $+40^{\circ}\text{C} \pm 3^{\circ}\text{C}$ relative humidity 95% and leave 3 hours in normal temperature and then checked.
04	Temp./Humidity cycle	The part shall be subjected 5 cycles. One cycle shall be 12 hours and consist of; 
05	Thermal cycle test.	Low temperature: $-30^{\circ}\text{C} \pm 3^{\circ}\text{C}$, temperature: $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$, cycle: 1 hour/cycle each, and then keep 5 cycles in a room.
06	Vibration	10~200~10Hz sin-wave sweep 15min. 5G(constant) X,Y, Z 3 direction. 2 hours each, total 6 hours.
07	Fix drop test	Fix on jig. Then drop from 152cm height to the concrete floor X, y, z 6 direction. 5 times each, total 30 times.
08	Free drop test	Free drop from 100cm height to the concrete floor X, y, z 6 direction. 1 times each, total 6 times.
09	Rated Power test	Rated Power white noise is applied for 96 hours
10	Max Power test	Max power 1 min on – 2 min off 10 cycles.
11	Terminal strength test	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.
12	Protection against liquids	The water flow is 10L/min, per square meter 1min product without leakage
Criterion: After these test , the change of S.P.L shall be within ± 3 dB .		

Soldering Condition

Recommend using constant branding iron in **15 ~ 30W**, and in temperature range **$350 \pm 10^{\circ}\text{C}$** .

Soldering time not over **3** seconds.

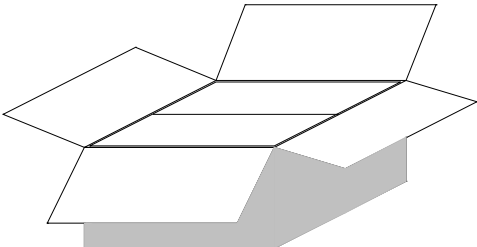5.Packing

REV NO.	REVISION NOTE	APPROVAL	DATE
 Cover(350*280*5mm) Material: Eps  Box(350*280*16mm) 35pcs Material: Eps  OPP TAPE Middle(350*280*160mm) 350pcs Material: Eps  Outer Box(590*390*405mm) 1400pcs Material: Paper 单位: mm			
TITLE: packing		DRAWN: Lily 2014/08/09	
PART NO.		DESIGNED: R&D OF D.S.	
DWG NO.		CHECKED: Emily	
REV 1		APPROVAL: Eric	
MATERIAL: ***		SCALE: 2:1	
		SHEET: 1 of 1	
		UNITS: mm	
		TOLERANCE	
		20~11 ± 0.3	
		10~5 ± 0.2	
		<4 ± 0.1	

DS

DRAGONSTATE ELECTRONIC CORPORATION



6. History change record

[illegible]