


## Features

- Enhancement mode
- Low on-resistance  $R_{DS(on)}$  @  $V_{GS}=4.5$  V
- Fast Switching and High efficiency
- 100% Avalanche test

$V_{DS}$	40	V
$R_{DS(on),TYP}$ @ $V_{GS}=10$ V	6.8	mΩ
$R_{DS(on),TYP}$ @ $V_{GS}=4.5$ V	10	mΩ
$I_D$	55	A

**PDFN3333**

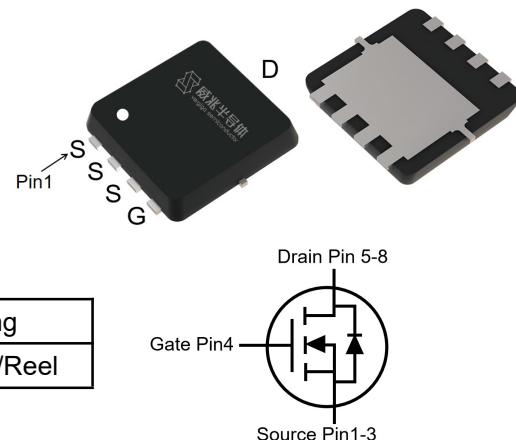

Part ID	Package Type	Marking	Packing
VS4610AE	PDFN3333	4610AE	5000PCS/Reel

## Maximum ratings, at $T_A = 25^\circ\text{C}$ , unless otherwise specified

Symbol	Parameter	Rating	Unit
$V_{(BR)DSS}$	Drain-Source breakdown voltage	40	V
$I_s$	Diode continuous forward current	$T_c = 25^\circ\text{C}$	A
$I_D$	Continuous drain current@ $V_{GS}=10\text{V}$	$T_c = 25^\circ\text{C}$	A
		$T_c = 100^\circ\text{C}$	A
$I_{DM}$	Pulse drain current tested ①	$T_c = 25^\circ\text{C}$	A
EAS	Avalanche energy, single pulsed ②	40	mJ
$P_D$	Maximum power dissipation	$T_c = 25^\circ\text{C}$	W
$V_{GS}$	Gate-Source voltage	$\pm 20$	V
$T_{STG} T_J$	Storage and operating temperature range	-55 to 150	°C

## Thermal Characteristics


Symbol	Parameter	Typical	Unit
$R_{\theta JC}$	Thermal Resistance-Junction to Case	3.8	°C/W
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient	35	°C/W

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
<b>Static Electrical Characteristics @ <math>T_j=25^\circ\text{C}</math> (unless otherwise stated)</b>						
$V_{(\text{BR})\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	40	--	--	V
$I_{\text{DSS}}$	Zero Gate Voltage Drain Current	$V_{\text{DS}}=40\text{V}, V_{\text{GS}}=0\text{V}$	--	--	1	$\mu\text{A}$
	Zero Gate Voltage Drain Current( $T_j=125^\circ\text{C}$ )	$V_{\text{DS}}=40\text{V}, V_{\text{GS}}=0\text{V}$	--	--	100	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Body Leakage Current	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	--	--	$\pm 100$	nA
$V_{\text{GS(TH)}}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	1.3	1.6	2.4	V
$R_{\text{DS(ON)}}$	Drain-Source On-State Resistance <sup>③</sup>	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=15\text{A}$	--	6.8	9	$\text{m}\Omega$
$R_{\text{DS(ON)}}$	Drain-Source On-State Resistance <sup>③</sup>	$V_{\text{GS}}=4.5\text{V}, I_{\text{D}}=10\text{A}$	--	10	13	$\text{m}\Omega$
<b>Dynamic Electrical Characteristics @ <math>T_j = 25^\circ\text{C}</math> (unless otherwise stated)</b>						
$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}}=20\text{V}, V_{\text{GS}}=0\text{V}, f=1\text{MHz}$	1700	2015	2300	pF
$C_{\text{oss}}$	Output Capacitance		120	170	220	pF
$C_{\text{rss}}$	Reverse Transfer Capacitance		60	110	160	pF
$R_g$	Gate Resistance	f=1MHz	--	2.1	--	$\Omega$
$Q_g$	Total Gate Charge	$V_{\text{DS}}=20\text{V}, I_{\text{D}}=15\text{A}, V_{\text{GS}}=10\text{V}$	--	49.6	--	nC
$Q_{\text{gs}}$	Gate-Source Charge		--	8	--	nC
$Q_{\text{gd}}$	Gate-Drain Charge		--	16.4	--	nC
<b>Switching Characteristics</b>						
$t_{\text{d(on)}}$	Turn-on Delay Time	$V_{\text{DD}}=20\text{V}, I_{\text{D}}=15\text{A}, R_{\text{G}}=3.0\Omega, V_{\text{GS}}=10\text{V}$	--	9.4	--	ns
$t_r$	Turn-on Rise Time		--	7.1	--	ns
$t_{\text{d(off)}}$	Turn-Off Delay Time		--	30.2	--	ns
$t_f$	Turn-Off Fall Time		--	7.5	--	ns
<b>Source- Drain Diode Characteristics@ <math>T_j = 25^\circ\text{C}</math> (unless otherwise stated)</b>						
$V_{\text{SD}}$	Forward on voltage	$I_{\text{SD}}=15\text{A}, V_{\text{GS}}=0\text{V}$	--	0.8	1.2	V
$t_{\text{rr}}$	Reverse Recovery Time	$T_j=25^\circ\text{C}, I_{\text{sd}}=15\text{A}, V_{\text{GS}}=0\text{V}$ $dI/dt=100\text{A}/\mu\text{s}$	--	36	--	ns
$Q_{\text{rr}}$	Reverse Recovery Charge		--	48	--	nC


**NOTE:**

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Limited by  $T_{j\text{max}}$ , starting  $T_j = 25^\circ\text{C}$ ,  $L = 0.5\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 10\text{A}$ ,  $V_{GS} = 10\text{V}$ . Part not recommended for use above this value
- ③ Pulse width  $\leq 300\mu\text{s}$ ; duty cycle  $\leq 2\%$ .


## Typical Characteristics

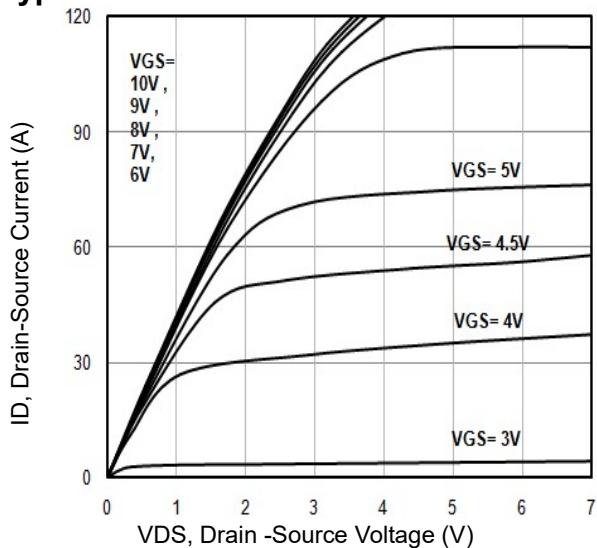


**Fig1.** Typical Output Characteristics

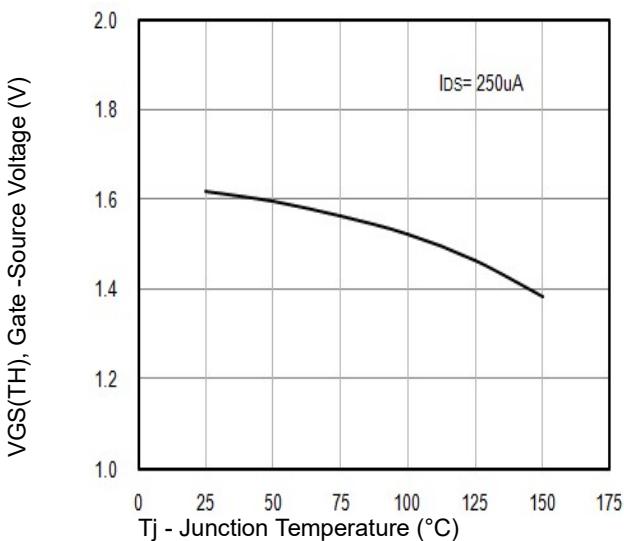


**Fig2.**  $V_{GS(TH)}$  Gate -Source Voltage Vs.  $T_j$

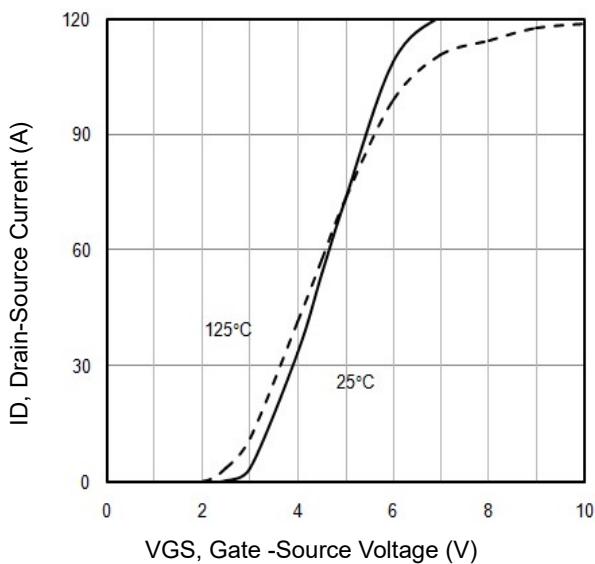


**Fig3.** Typical Transfer Characteristics

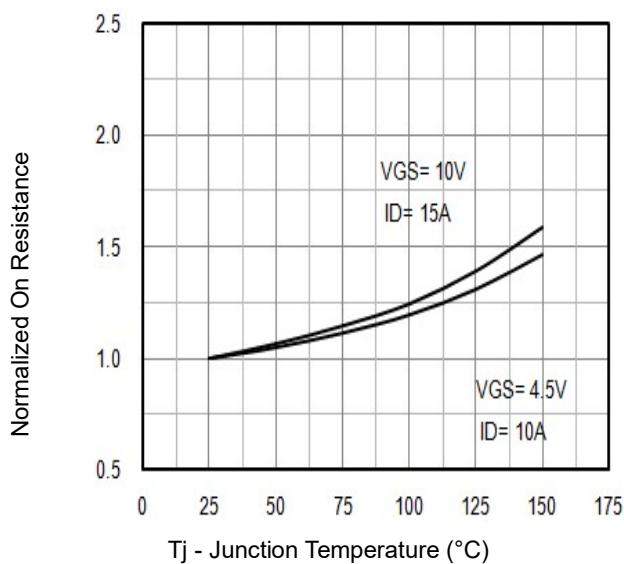

**Fig4.** Normalized On-Resistance Vs.  $T_j$

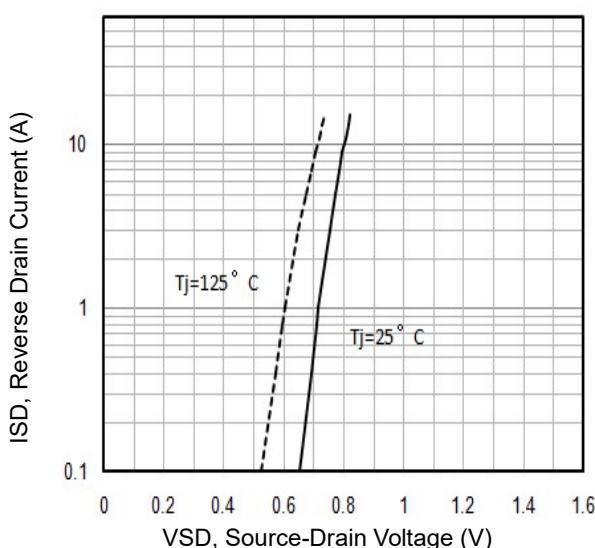


**Fig5.** Typical Source-Drain Diode Forward Voltage

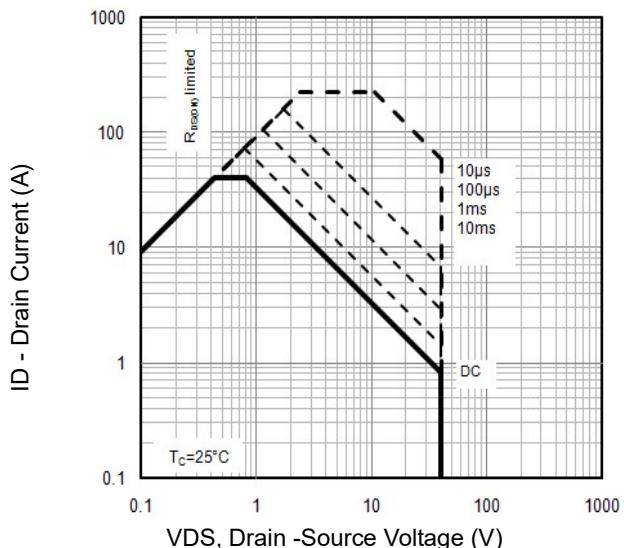


**Fig6.** Maximum Safe Operating Area


## Typical Characteristics

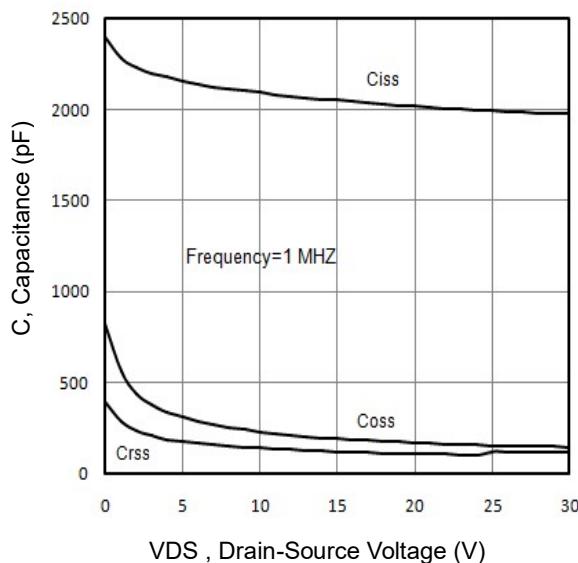


**Fig7.** Typical Capacitance Vs.Drain-Source Voltage

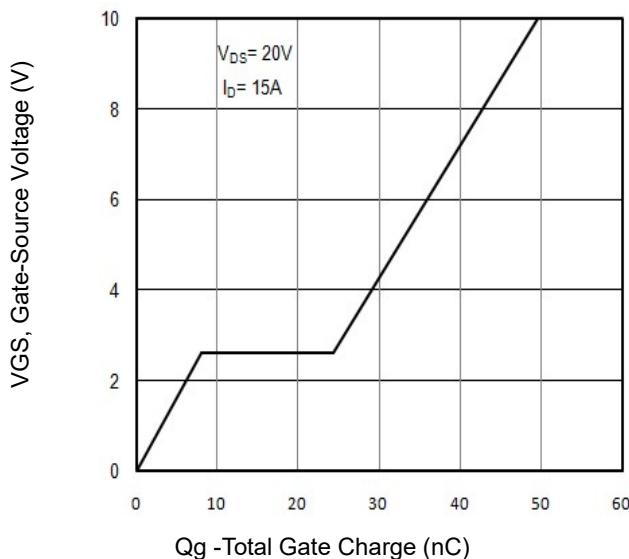


**Fig8.** Typical Gate Charge Vs.Gate-Source Voltage

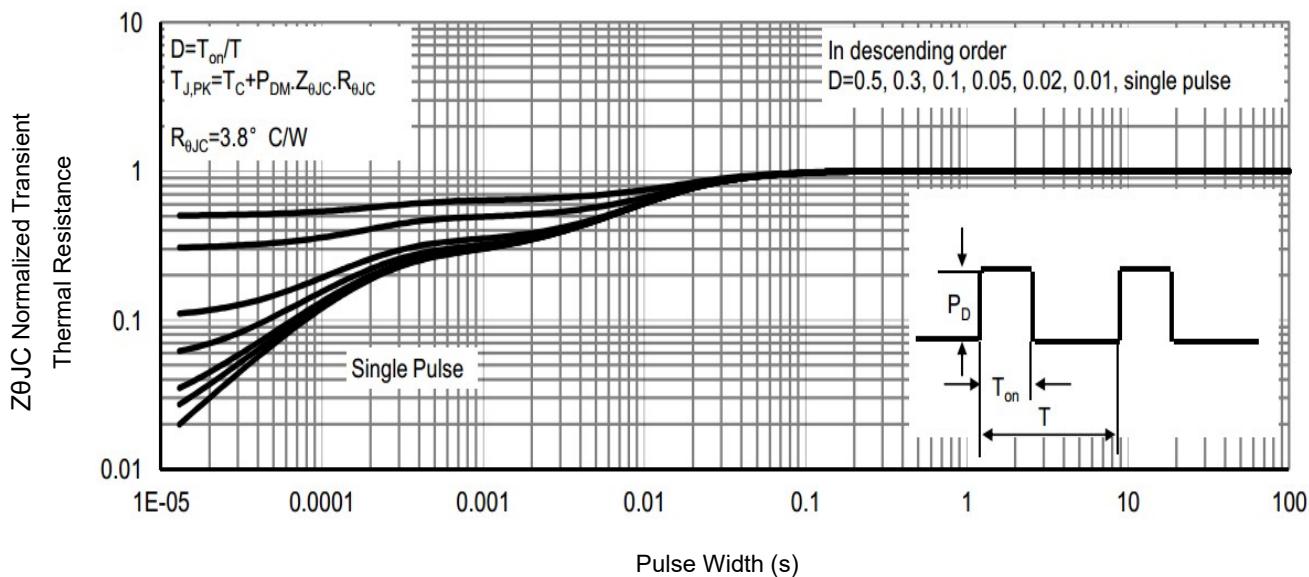

**Fig9.** Normalized Maximum Transient Thermal Impedance

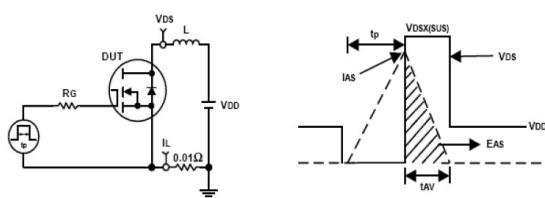


**Fig10.** Unclamped Inductive Test Circuit and waveforms

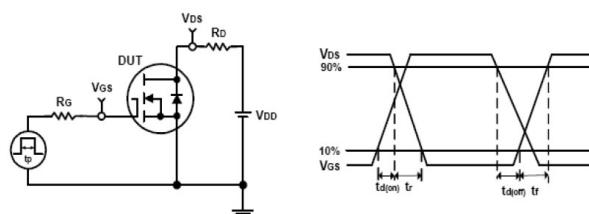

**Fig11.** Switching Time Test Circuit and waveforms

## Marking Information

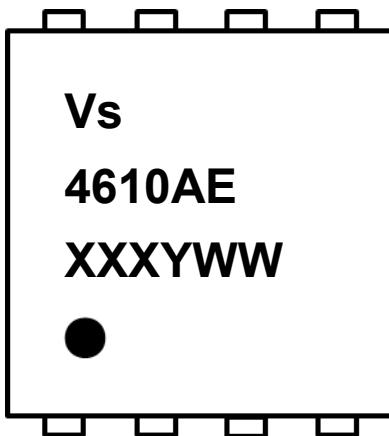

1<sup>st</sup> line: Vergiga Code (Vs)

2<sup>nd</sup> line: Part Number (4610AE)

3<sup>rd</sup> line: Date code (XXXYWW)


XXX: Wafer Lot Number Code , code changed with Lot Number

Y: Year Code , refer to table below

WW: Week Code (01 to 53)

Code	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T
Year	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030

## PDFN3333 Package Outline Data

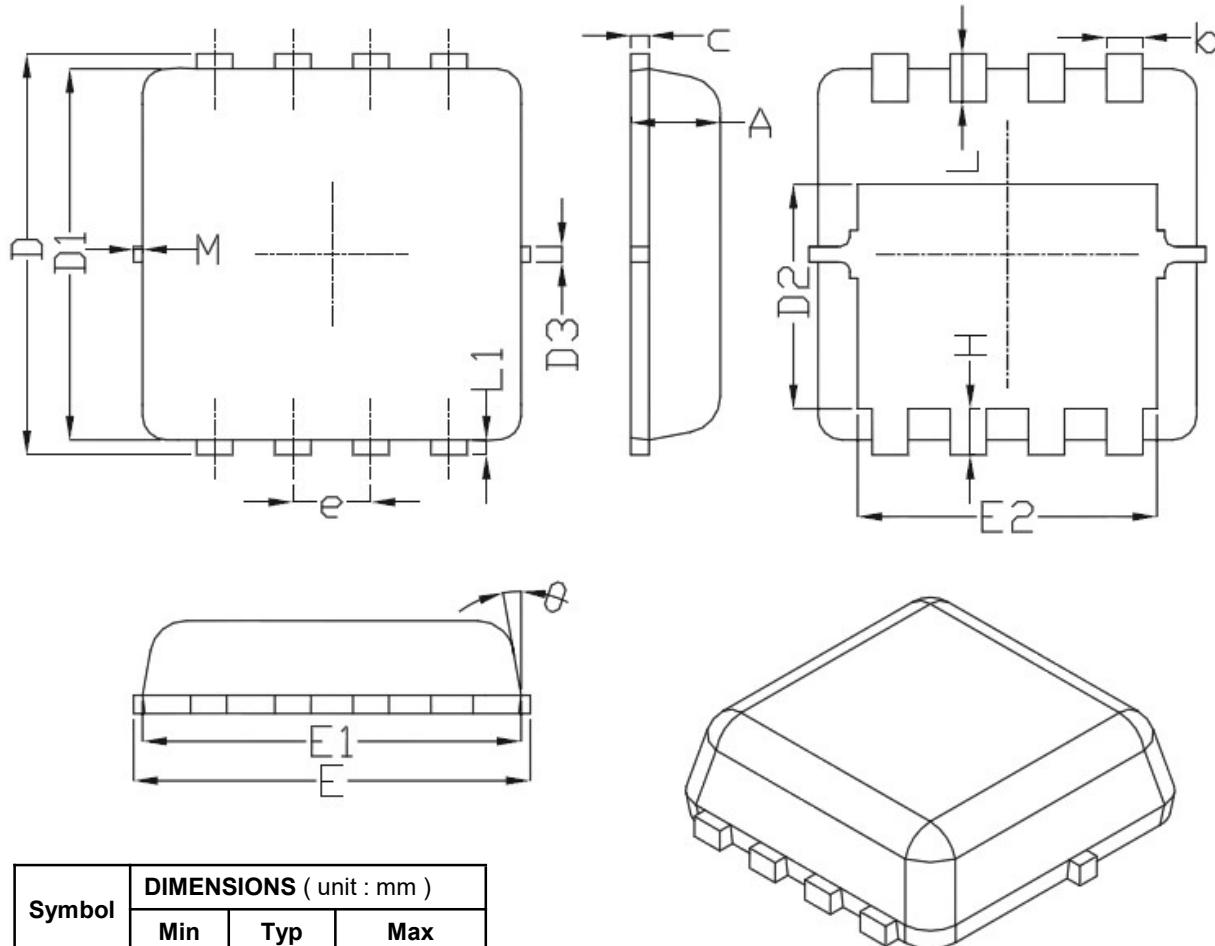

Symbol	DIMENSIONS ( unit : mm )		
	Min	Typ	Max
A	0.7	0.75	0.8
b	0.25	0.3	0.35
C	0.1	0.15	0.25
D	3.25	3.35	3.45
D1	3	3.1	3.2
D2	1.78	1.88	1.98
D3	--	0.13	--
E	3.2	3.3	3.4
E1	3	3.15	3.2
E2	2.39	2.49	2.59
e	0.65 BSC		
H	0.3	0.39	0.5
L	0.3	0.4	0.5
L1	--	0.13	--
$\theta$	--	10°	12°
M	*	*	0.15
* Not specified			

### Notes:

1. Follow JEDEC MO-240 variation CA.
2. Dimensions "D1" and "E1" do NOT include mold flash protrusions or gate burrs.
3. Dimensions "D1" and "E1" include interterminal flash or protrusion. Interterminal flash or protrusion shall not exceed 0.25mm per side.

## Customer Service

### Sales and Service:

[sales@vgsemi.com](mailto:sales@vgsemi.com)

**Vergiga Semiconductor CO., LTD**

**TEL:** (86-755) -26902410

**FAX:** (86-755) -26907027