REV.	DESCRIPTION	ECN NO.	NAME	DATE

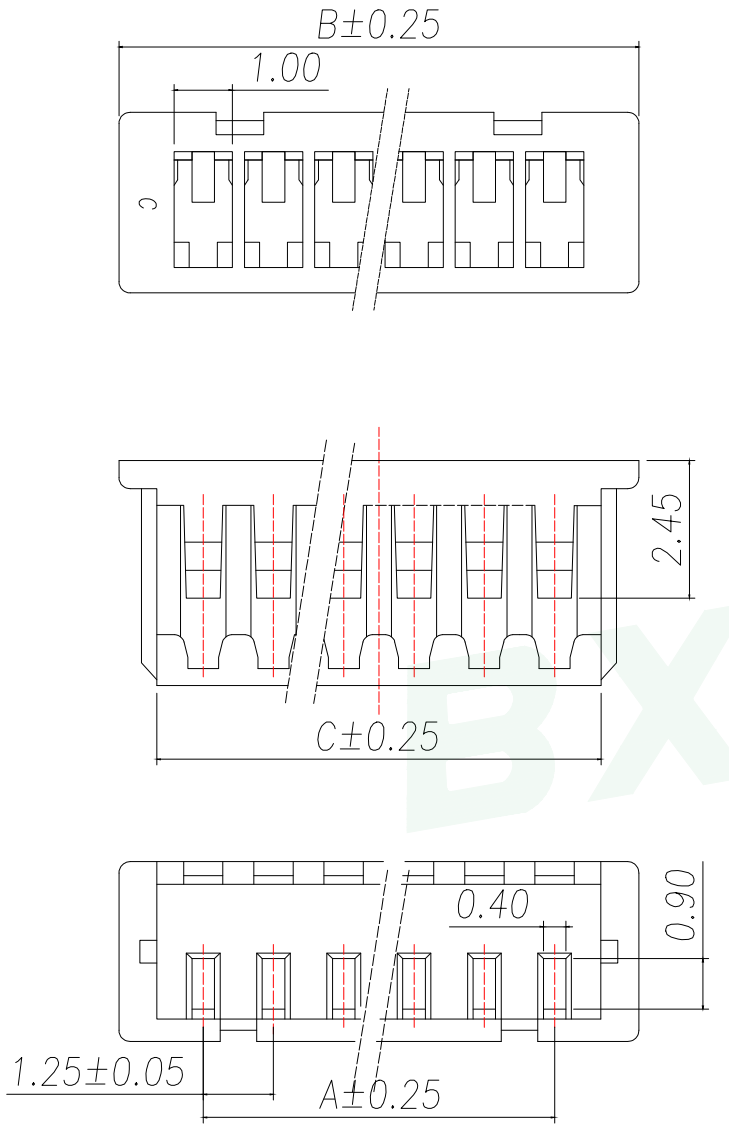



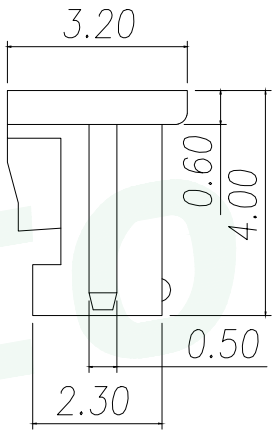

技术要求Specification:

1、材质Material: PA66 UL94V-0:
2、额定电流 Current rating:1.0A AC,DC
3、额定电压 Voltage rating:50V AC,DC
4、温度范围 Temperature range:-25℃to+85℃
5、接触电阻 Contact resistance:≤20mΩ
6、绝缘电阻Insulation resistance:≥100MΩ
7、耐压Withstand voltage:250V AC/minute
8、塑件表面平整光洁，无明显的毛刺、气泡、变形、浇口拉伤、缺料等不良现象.
Plastic surface smooth and clean, no obvious burrsbubbles, distortion, gate strain, lack of material and otherundesirable phenomena.

Part No	Pin	A	B	C
WF-1D125A2P	2	1.25	4.30	3.00
WF-1D125A3P	3	2.50	5.55	4.25
WF-1D125A4P	4	3.75	6.80	5.50
WF-1D125A5P	5	5.00	8.05	6.75
WF-1D125A6P	6	6.25	9.30	8.00
WF-1D125A7P	7	7.50	10.55	9.25
WF-1D125A8P	8	8.75	11.80	10.50
WF-1D125A9P	9	10.00	13.05	11.75
WF-1D125A10P	10	11.25	14.30	13.00
WF-1D125A11P	11	12.50	15.55	14.25
WF-1D125A12P	12	13.75	16.80	15.50
WF-1D125A13P	13	15.00	18.05	16.75
WF-1D125A14P	14	16.25	19.30	18.00
WF-1D125A15P	15	17.50	20.55	19.25
WF-1D125A16P	16	18.75	21.80	20.50

GENERAL TOLERANCE

DIM.	TOL.
X	
X.X	±0.30
X.XX	±0.25
X.XXX	±0.15
GENERAL ANGLE:	±3°

DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD

BXCONN®

TITLE: MX1.25MM HOUSING

DWG. NO.: WF-1D125ANP

DRAWN: MAX

PART NO.: WF-1D125ANP

CHECKED: ELLA

UNIT:	SCALE:	SHEET:	DWG. SIZE:	LAYER:
mm	none	1 of 1	A4	bxconn

APPROVED: WILL