

Features

- Low operating voltage: 5V
- Ultra low capacitance: 0 . 3 pF typical (I/O to I/O)
- Ultra low leakage: nA level
- Low clamping voltage
- -IEC 61000-4-2 (ESD) immunity test
Air discharge: $\pm 20\text{kV}$
Contact discharge: $\pm 15\text{kV}$
- IEC61000-4-4 (EFT) 40A (5/50ns)
- IEC61000-4-5(Lightning):4.0A(8/20 μs)
- These are Pb-Free Devices
- Response Time is Typically < 1 ns


Mechanical Characteristics

- Package: SOT-553
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound
- Terminal Connections: See Diagram Below
- - IEC 61000-4-2 (ESD) immunity test


Applications

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Set-top boxes
- Notebooks and Handhelds

Dimensions SOT-553

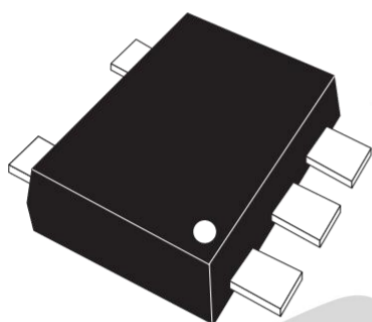

Dimensions and Pin Configuration

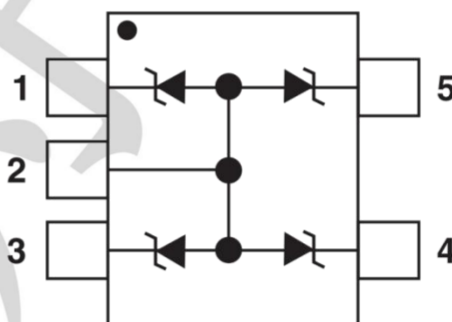

Marking:28S

Circuit and Pin Schematic

Absolute Maximum Ratings(Tamb=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μs)	Ppp	50	W
Peak Pulse Current (8/20μs)	Ipp	4.0	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	VESD	±20 ±15	KV
Operating Temperature Range	TJ	-55 to +125	°C
Storage Temperature Range	Tstg	-55 to +150	°C

Electrical Characteristics (TA=25°C unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	VRWM	--	--	5	V	Any I/O pin to ground
Breakdown Voltage	VBR	--	6.5	--	V	IT= 1mA,Any I/O pin to ground
Reverse Leakage Current	IR	--	0.1	--	uA	VRWM=5V,Any I/O pin to ground
Clamping Voltage	VC	--	--	10	V	Ipp=1A(8x 20us pulse), Any I/O pin to ground
Clamping Voltage	VC	--	--	12	V	Ipp=4A(8x 20us pulse), Any I/O pin to ground
Forward Voltage	VF	--	--	1	V	IF = 10 mA
Junction Capacitance	Cvo-GND	--	0.5	--	pF	VR=0V,f=1MHz, Any I/O to GND
	Ci/o- I/O	--	0.3	0.6	pF	VR=0V,f=1MHz, between I/O pins

Characteristic Curves

Fig1. 8/20 μ s Pulse Waveform

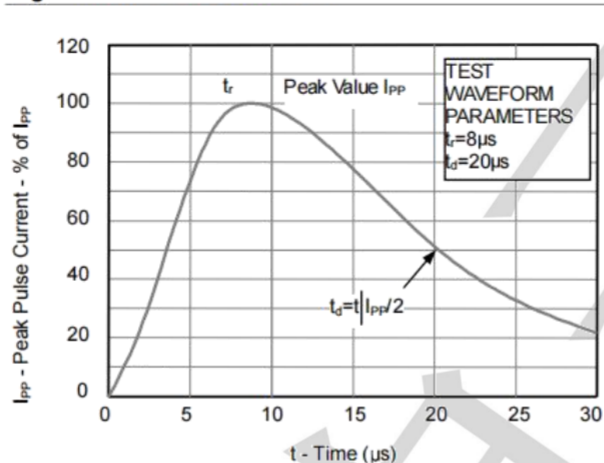


Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)



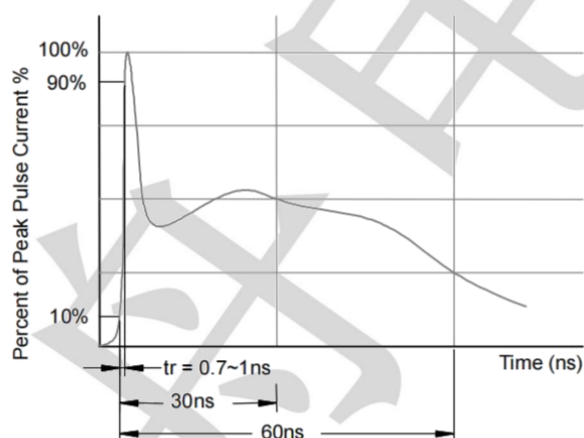


Fig3. Power Derating Curve

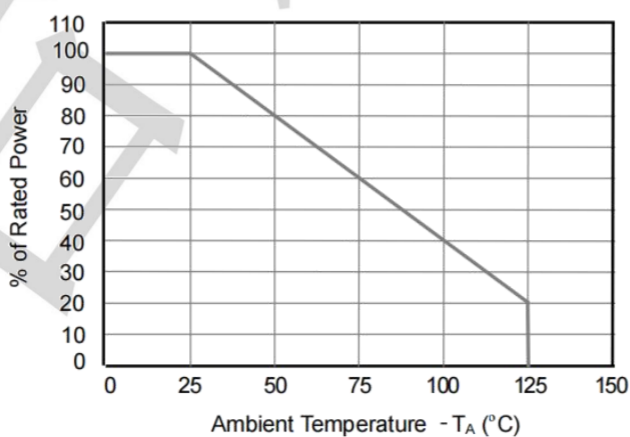

Package Outline & Dimensions

SOT-553

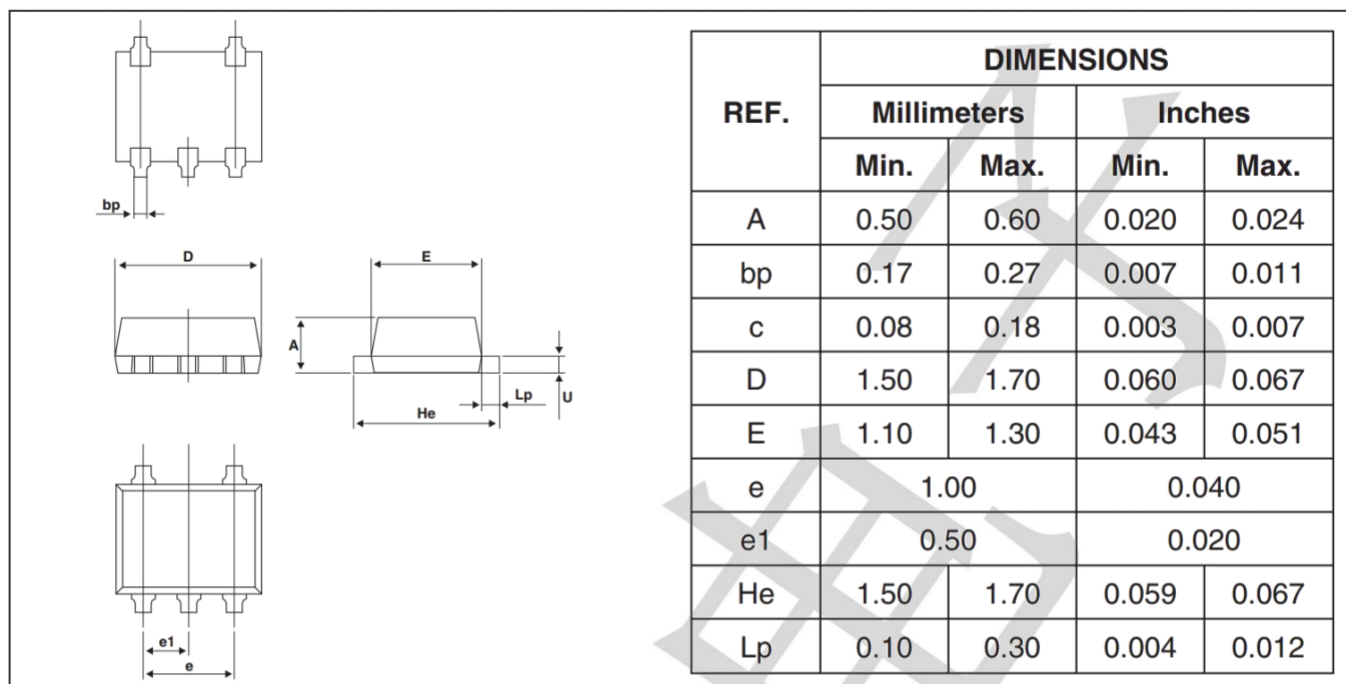

FOOT PRINT (millimeters)

