


TO-92


1. OUT
2. GND
3. IN

Features

- ✧ Maximum Output current I_O : 0.1 A
- ✧ Output voltage V_O : 5 V
- ✧ Continuous total dissipation
 P_D : 0.625W ($T_a=25^\circ\text{C}$)

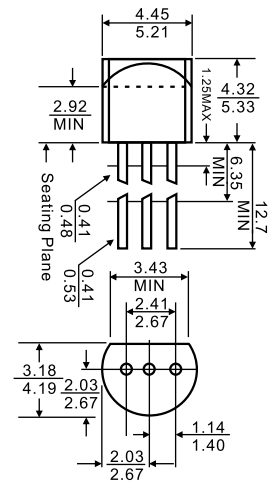

Dimensions in inches and (millimeters)


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	-40~+125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55~+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($V_I=10\text{V}, I_O=40\text{mA}, C_i=0.33\mu\text{F}, C_o=0.1\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_O	25°C	4.75	5.0	5.25	V
		$7\text{V} \leq V_I \leq 20\text{V}, I_O=1\text{mA} \sim 40\text{mA}$	4.75	5.0	5.25	V
		$I_O=1\text{mA} \sim 70\text{mA}$	4.75	5.0	5.25	V
Load Regulation	ΔV_O	$I_O=1\text{mA} \sim 100\text{mA}$		15	60	mV
		$I_O=1\text{mA} \sim 40\text{mA}$		8	30	mV
Line regulation	ΔV_O	$8\text{V} \leq V_I \leq 20\text{V}$		32	200	mV
		$9\text{V} \leq V_I \leq 20\text{V}$		26	150	mV
Quiescent Current	I_q	25°C		3.8	6	mA
Quiescent Current Change	ΔI_q	$8\text{V} \leq V_I \leq 20\text{V}$			1.5	mA
	ΔI_q	$1\text{mA} \leq V_I \leq 40\text{mA}$			0.2	mA
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{KHz}$		40		μV
Ripple Rejection	RR	$8\text{V} \leq V_I \leq 20\text{V}, f=120\text{Hz}$	41	49		dB
Dropout Voltage	V_d	25°C		1.7		V


TYPICAL APPLICATION

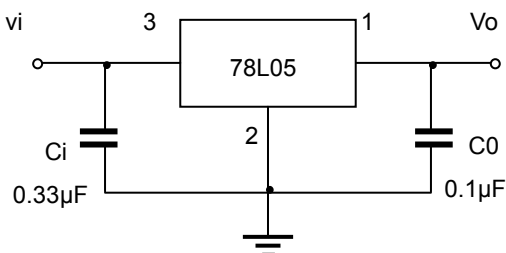


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as Possible to the regulators.

Typical Characteristics


L78L05/12/24 Output Characteristics

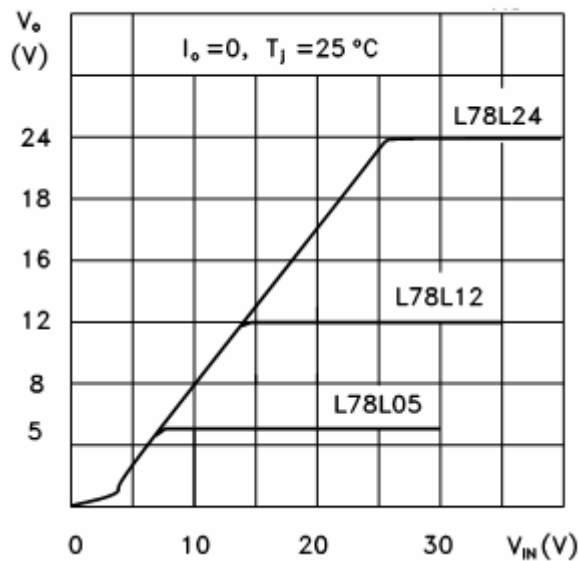


L78L05/12/24 Load Characteristics

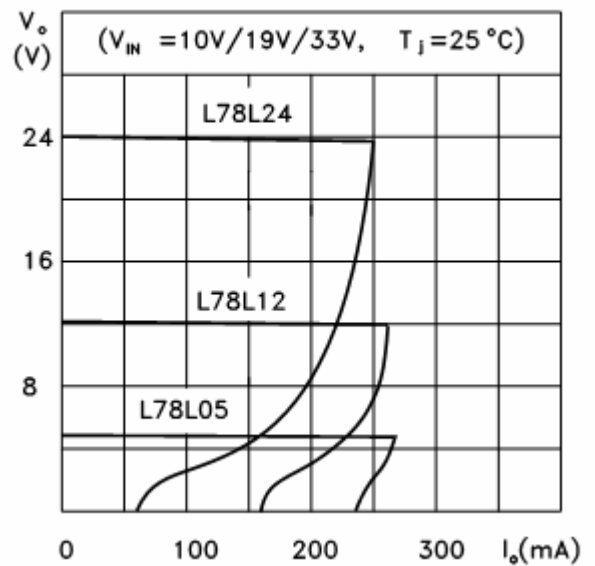

L78L05/12/24 Thermal Shutdown

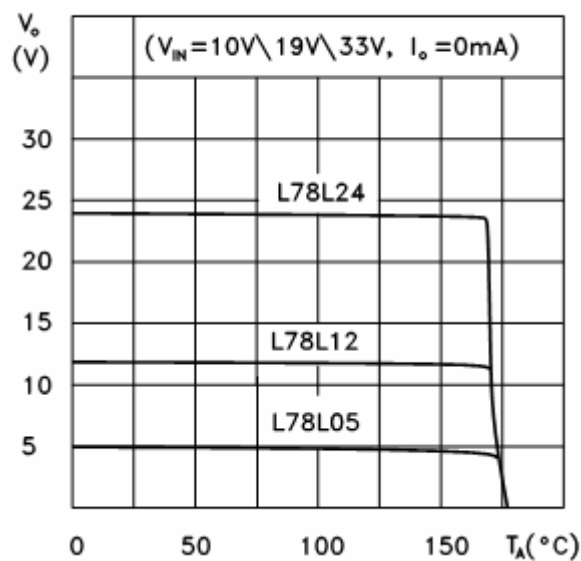

L78L00 Series Short Circuit Output Current

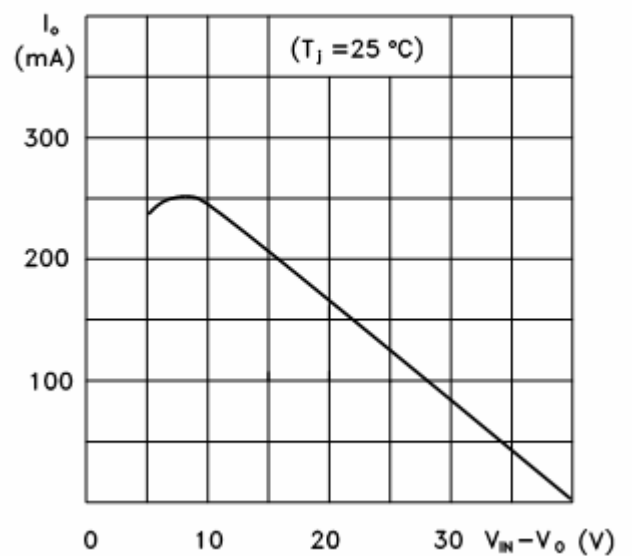

L78L05 Quiescent Current vs Input Voltage

