


Description:

This N-Channel MOSFET uses advanced trench technology and design to provide excellent $R_{DS(on)}$ with low gate charge.

It can be used in a wide variety of applications.

Features:

- 1) $V_{DS}=100V, I_D=15A, R_{DS(ON)} < 100 m\Omega @ V_{GS}=10V$
- 2) Low gate charge.
- 3) Green device available.
- 4) Advanced high cell density trench technology for ultra $R_{DS(ON)}$.
- 5) Excellent package for good heat dissipation.

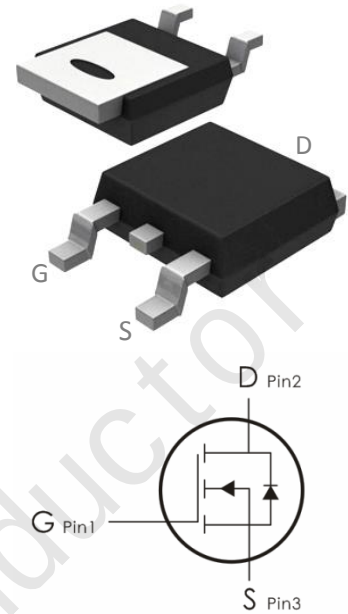

Absolute Maximum Ratings: ($T_C=25^\circ C$ unless otherwise noted)

Symbol	Parameter	Ratings	Units
V_{DS}	Drain-Source Voltage	100	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Continuous Drain Current- $T_C=25^\circ C$	15	A
	Continuous Drain Current- $T_C=70^\circ C$	12	
	Pulsed Drain Current ¹	60	
E_{AS}	Single Pulse Avalanche Energy	16	mJ
P_D	Power Dissipation, $T_C=25^\circ C$	50	W
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55 to +150	$^\circ C$

Thermal Characteristics:

Symbol	Parameter	Max	Units
$R_{\theta JC}$	Thermal Resistance, Junction to Case	3	$^\circ C/W$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	---	

Electrical Characteristics: ($T_c=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Off Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250 μ A	100	---	---	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{GS} =0V, V _{DS} =80V	---	---	1	μ A
I _{GSS}	Gate-Source Leakage Current	V _{GS} =± 20V, V _{DS} =0A	---	---	± 100	nA
On Characteristics						
V _{GS(th)}	GATE-Source Threshold Voltage	V _{GS} =V _{DS} , I _D =250 μ A	1	2	3	V
R _{DS(ON)}	Drain-Source On Resistance ³	V _{GS} =10V, I _D =10A	---	75	100	m Ω
		V _{GS} =4.5V, I _D =8A	---	100	115	
G _{FS}	Forward Transconductance	V _{DS} =0V, I _D =0A	---	---	---	S
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} =25V, V _{GS} =0V, f=1MHz	---	890	---	pF
C _{oss}	Output Capacitance		---	60	---	
C _{rss}	Reverse Transfer Capacitance		---	25	---	
Switching Characteristics						
t _{d(on)}	Turn-On Delay Time ³	V _{DD} =25V, I _D =8A, V _{GS} =10V, R _{GEN} =1Ω	---	14.2	---	ns
t _r	Rise Time ^{2,3}		---	34	---	ns
t _{d(off)}	Turn-Off Delay Time		---	40.4	---	ns
t _f	Fall Time ^{2,3}		---	6	---	ns
Q _g	Total Gate Charge ³	V _{GS} =10V, V _{DS} =80V, I _D =10A	---	24	---	nC
Q _{gs}	Gate-Source Charge		---	5	---	nC
Q _{gd}	Gate-Drain “Miller” Charge		---	8	---	nC
Drain-Source Diode Characteristics						
V _{SD}	Source-Drain Diode Forward Voltage ³	V _{GS} =0V, I _S =8A	---	0.8	1.2	V

Trr	Reverse Recovery Time	ISD=8A, VGS=0V di/dt=100A/μs	---	35	---	Ns
qrr	Reverse Recovery Charge		---	121	---	nc

Notes:

- ① Pulse width limited by maximum allowable junction temperature
- ② Limited by TJmax, starting TJ = 25°C, L = 0.1mH, RG = 25Ω, IAS = 18A, VGS = 10V. Part not recommended for use above this value
- ③ Pulse width ≤ 300μs; duty cycle ≤ 2%.

Typical Characteristics: (T_c=25°C unless otherwise noted)

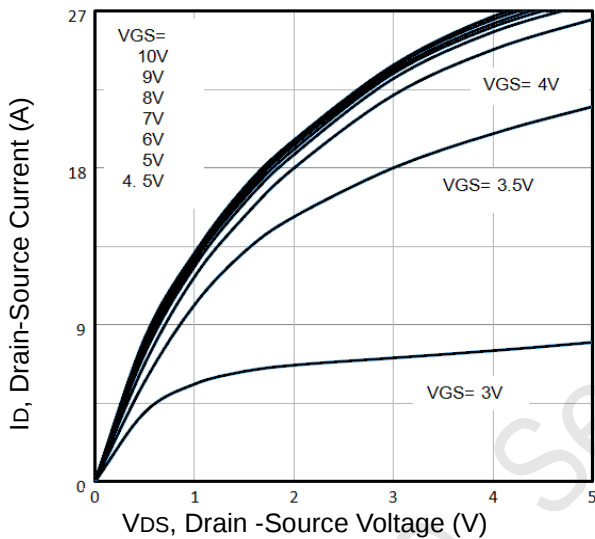


Fig1. Typical Output Characteristics

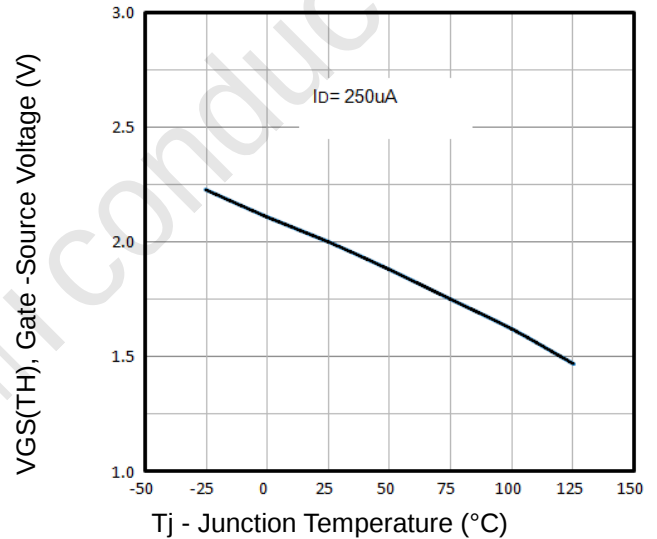


Fig2. VGS(TH) Voltage Vs. Temperature

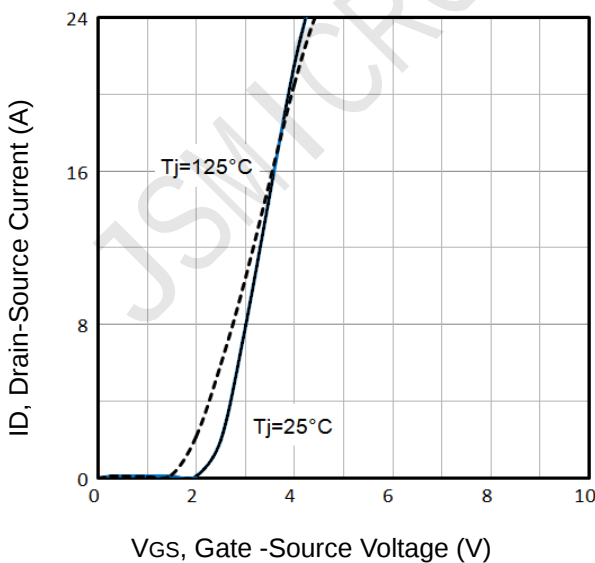


Fig3. Typical Transfer Characteristics

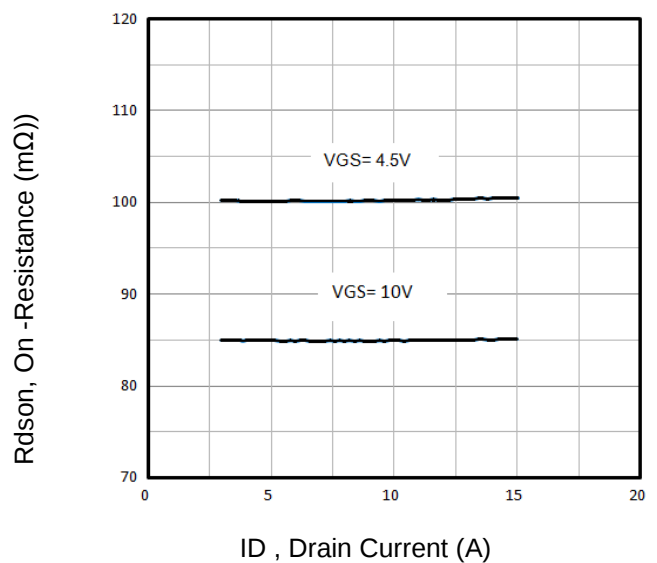
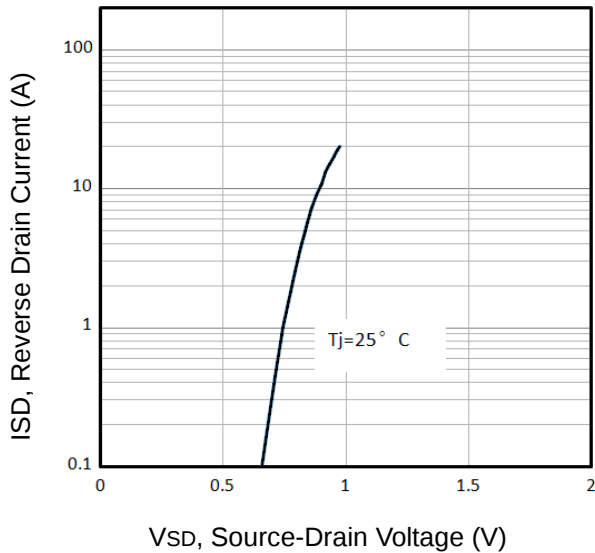
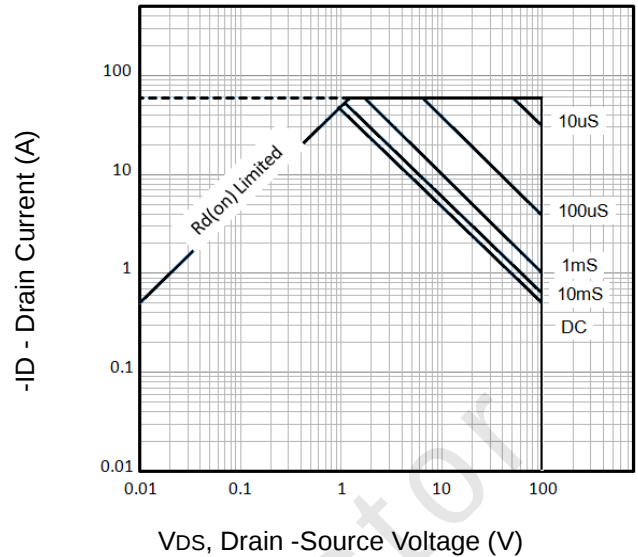
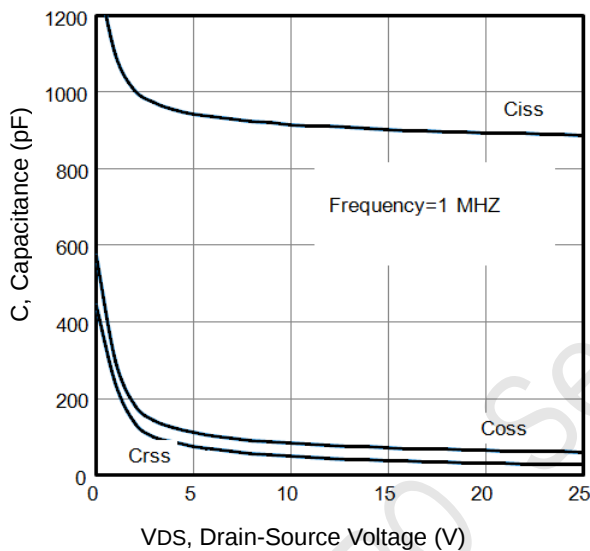
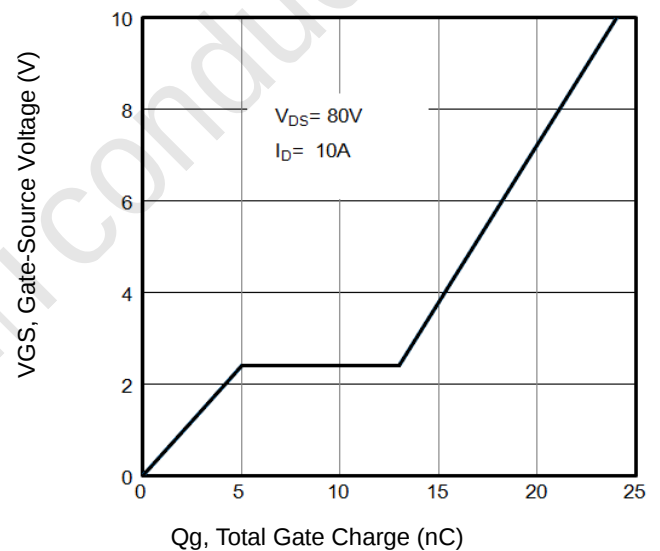
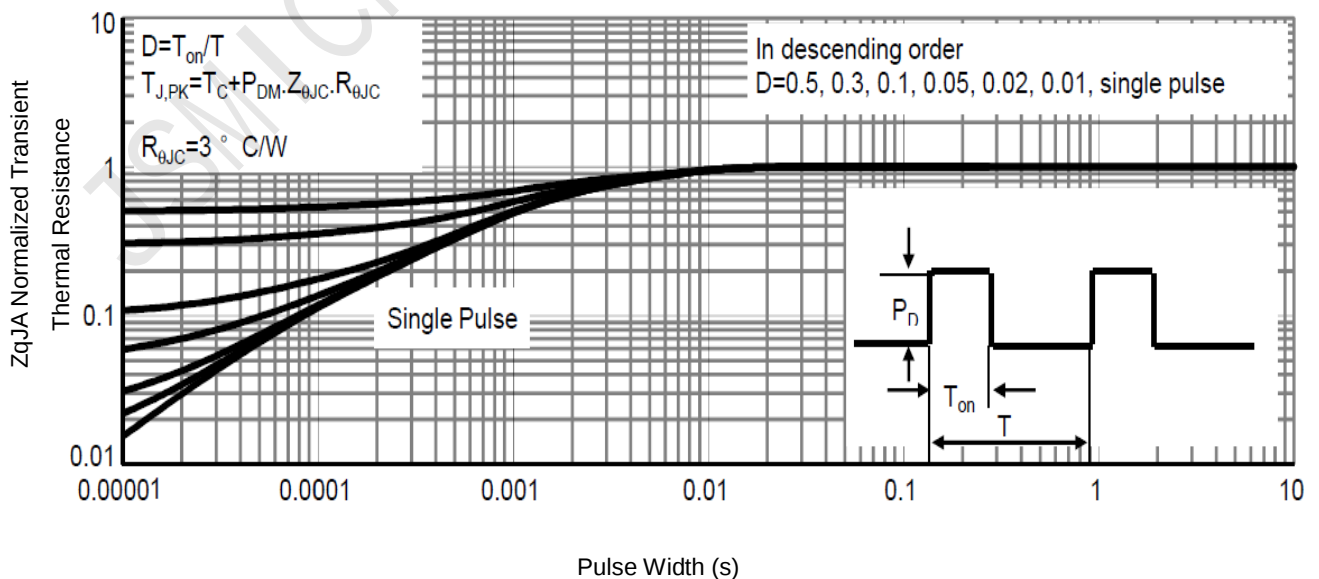
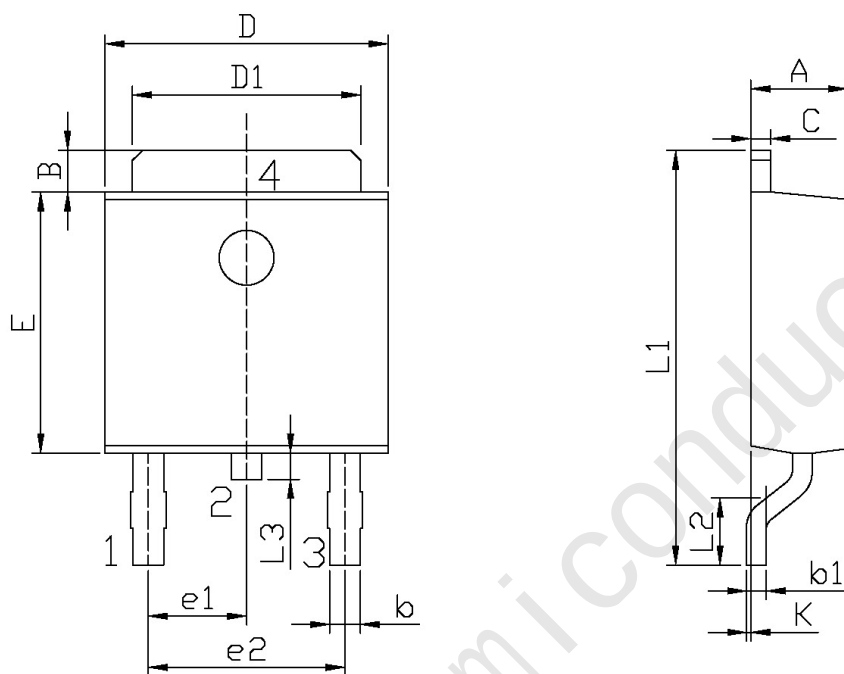


Fig4. On-Resistance vs. Drain Current and Gate Voltage


Fig5. Typical Source-Drain Diode Forward Voltage

Fig6. Maximum Safe Operating Area

Fig7. Typical Capacitance Vs. Drain-Source Voltage

Fig8. Typical Gate Charge Vs. Gate-Source Voltage

Fig9. Normalized Maximum Transient Thermal Impedance

外形尺寸图 / Package Dimensions



单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	E	5.95	6.25
B	0.95	1.25	e1	2.24	2.34
b	0.50	0.70	e2	4.43	4.73
b1	0.45	0.55	L1	9.45	9.95
C	0.45	0.55	L2	1.25	1.75
D	6.45	6.75	L3	0.60	0.90
D1	5.10	5.50	K	0.00	0.10

T0-252