SAMZO | REAC/ROHS

REV	ECN NO	DESRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.14

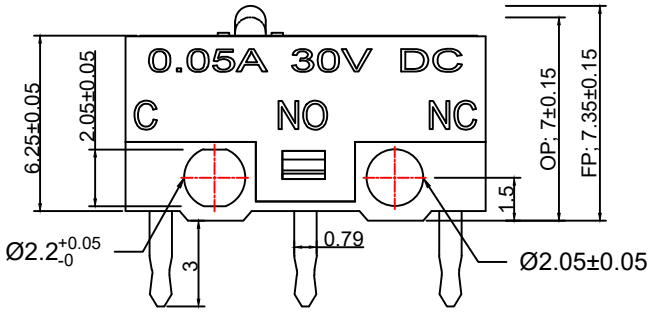



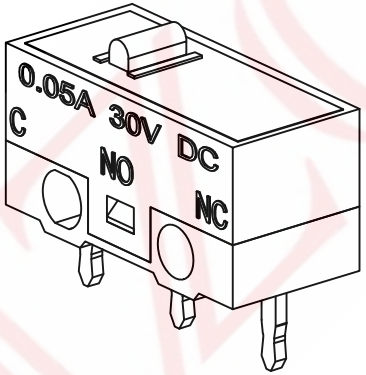

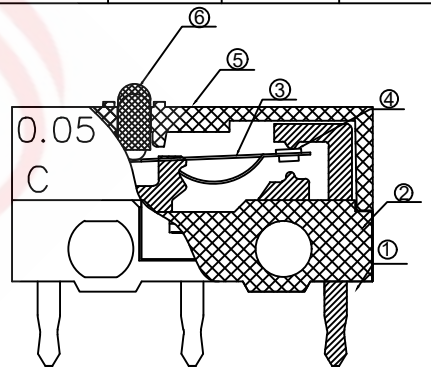

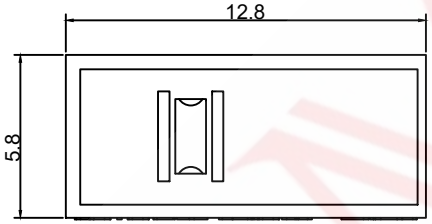

4	B	E	A	W	Y	H	E
Ⓐ	Ⓑ	Ⓒ	Ⓓ	Ⓔ	Ⓕ	Ⓖ	

A.系列:4B:12.8系列
B.贴装方式:E-3P DIP
C.操作方式:A:点触
D.性能特性:W:0.05A 30V DC
E:触点镀层:Y-镀银
F:操作力度:H-90gf
G:使用寿命:E:3,000,000万次



P.C.B



SCHEMATIC

Rating	DC30V 0.05A	Electrical Life	1,00,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	3,000,000 cycles
Insulation Resistance	>500MΩ	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	90gf max

ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR					
6	按钮	POM	1	白色					
5	上盖	尼龙	1	黑色				GENERAL TOLERANCE	
4	触点	银点	1	XXX				≥0~2<	±0.15
3	弹片	磷铜	1	XXX	DESIGN	WANGGUIFA	2018.06.12	≥2~5<	±0.25
2	基座	PPA	1	灰色	CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0.15
1	接触脚	黄铜	3	镀银	APPROVED	LILIANJIANG	2018.06.14	≥5	±0.35

FIRST VIEW



SCALE 1:1 UNIT mm

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

SAMZO COMPONENTS
Electronic switch and connector manufacturer

TITLE:: 12.8*5.8 微动开关
DWG NO: 4BE1280-E01
PART NO: 4BE16151002
MODEL NO: 4BEAWYHE
NAME: MICRO SWITCH